

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11) **EP 0 833 082 B1**

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
26.11.2003 Bulletin 2003/48

(51) Int Cl.7: **F16H 61/06**

(21) Application number: **97116232.6**

(22) Date of filing: **18.09.1997**

(54) Control apparatus for hydraulically operated vehicular transmission

Steuergerät für hydraulisch gesteuertes Fahrzeuggetriebe

Dispositif de commande pour transmission véhiculaire à commande hydraulique

(84) Designated Contracting States:
DE FR GB

(30) Priority: **25.09.1996 JP 25362696**

(43) Date of publication of application:
01.04.1998 Bulletin 1998/14

(73) Proprietor: **HONDA GIKEN KOGYO KABUSHIKI
KAISHA**
Minato-ku, Tokyo (JP)

(72) Inventors:
• **Miyamoto, Osahide**
Chuo, Wako-shi, Saitama-ken (JP)
• **Ohashi, Tatsuyuki**
Chuo, Wako-shi, Saitama-ken (JP)

- **Ishibashi, Hiromitsu**
Chuo, Wako-shi, Saitama-ken (JP)
- **Saito, Yoshiharu**
Chuo, Wako-shi, Saitama-ken (JP)
- **Tokita, Kaname**
Chuo, Wako-shi, Saitama-ken (JP)

(74) Representative: **Melzer, Wolfgang, Dipl.-Ing. et al**
Patentanwälte
Mitscherlich & Partner,
Sonnenstrasse 33
80331 München (DE)

(56) References cited:
EP-A- 0 235 892 **EP-A- 0 331 523**
EP-A- 0 583 954 **EP-A- 0 715 099**
EP-A- 0 725 234 **US-A- 5 012 699**
US-A- 5 443 427

EP 0 833 082 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

Technical Field

[0001] The present invention relates to a control apparatus for a hydraulically operated vehicular transmission having a plurality of speed stages to be established by a selecting operation of a plurality of hydraulic engaging elements, the transmission being coupled to an engine via a fluid torque converter. In this specification, the term "vehicular transmission" means a transmission for a vehicle such as a motor vehicle.

[0002] A control apparatus with the features of the entrance part of claim 1 is disclosed in EP 715 099 A2, wherein the reference value is a function of the rotational speed in a reference target torque and the computation is based on the difference between the output torque at the time of start of downshifting and said reference torque, which calculation is very precise.

[0003] From US 5012699 it is known that for a downshift the pressure on the clutch at the disengaging side is corrected according to the magnitude of change of engine speed so that the gearshift is carried out smoothly irrespective of engine speed and throttle position. Such calculation is less precise as the assumption the vehicle speed being proportional to the engine rotational speed is not guilty in various situations such as slipping of the fluid torque converter.

[0004] For better understanding, a kind of conventional control apparatus with the following arrangement is discussed in detail, namely at the time of downshifting, hydraulic pressure of a hydraulic engaging element on the disengaging side is lowered first. The engine is thus raced by the slipping of this engaging element, whereby a rotational speed of an input shaft of the transmission is increased. When an input and output speed ratio (rotational speed of an output shaft / rotational speed of an input shaft) of the transmission has lowered to a synchronous region which is approximately equal to the gear ratio of a speed stage to be established by the downshifting, a hydraulic engaging element on the engaging side to establish that speed stage is engaged so that a smooth downshifting can be performed.

[0005] In case a fluid torque converter is interposed between the engine and the transmission, the rotational speed of the engine exceeds the rotational speed of the input shaft of the transmission due to slipping in the fluid torque converter. Especially, when an accelerator is slowly depressed, only the rotational speed of the engine increases by the slipping of the fluid torque converter if the vehicle speed does not change, and a downshifting is sometimes started in this condition. In such a case, if slipping occurs to the hydraulic engaging element on the disengaging side after start of the downshifting, the rotational speed of the input shaft of the transmission rapidly increases so as to approach the rotational speed of the engine. As a result, the input and output speed ratio rapidly decreases and, while the hydraulic pressure in the hydraulic engaging element on the engaging side has not been raised (or boosted) enough, the input and output speed ratio lowers into the synchronous region, whereby the hydraulic engaging element on the engaging side can no longer be engaged at the time of synchronization. According to this, the engine excessively races and shocks occur.

[0006] In view of the above point, the present invention has an object of providing a control apparatus for a hydraulically operated vehicular transmission in which a smooth downshifting can be performed even if an excessive increase in the rotational speed of the engine may have occurred due to slipping of the fluid torque converter.

[0007] In order to attain the above and other objects, the control apparatus of the present invention is characterized by the features of the characterizing part of claim 1.

[0008] Thus there is provided a control apparatus for a hydraulically operated vehicular transmission having a plurality of speed stages to be established by a selecting operation of a plurality of hydraulic engaging elements; the transmission being coupled to an engine of a vehicle via a fluid torque converter, wherein the apparatus comprises: means for detecting speed change developing degree of a rotational speed of the engine at the time of start of downshifting, the developing degree being dependent on an increase in the rotational speed of the engine due to slipping in the fluid torque converter; and means for boosting a hydraulic pressure during downshifting of a hydraulic engaging element on the disengaging side to be disengaged at the time of downshifting, a value of boosting being dependent on the speed change developing degree. Further the means for detecting speed change developing degree comprises: means for detecting the rotational speed of the engine at the time of start of downshifting; means for detecting a rotational speed of an input shaft of the transmission at the time of start of downshifting; wherein a scheduled speed ratio of the fluid torque converter at the time of completion of downshifting is defined to be a reference rotational speed ratio; the rotational speed of the engine to be obtained by the reference rotational speed ratio and the rotational speed of the input shaft of the transmission at the time of start of downshifting is defined to be a reference rotational speed of the engine; and the rotational speed of the engine to be obtained by the reference rotational speed of the engine, a speed ratio before start of downshifting, and a speed ratio after completion of downshifting is defined to be a target rotational speed of the engine; and means for computing the speed change developing degree as a ratio of a difference between the rotational speed of the engine at the time of start of downshifting and the reference rotational speed of the engine to a difference between the target rotational speed of the engine and the reference rotational speed of the engine.

[0009] Further, a boosting correction value by the correcting means is preferably computed by multiplying a reference

correction value by the ratio of the difference.

[0010] According to the present invention, if the rotational speed of the engine has already increased due to slipping of the hydraulic fluid converter at the time of start of downshifting, the hydraulic pressure of the hydraulic engaging element on the disengaging side is corrected to boost, and the lowering of the input and output speed ratio of the transmission is restrained by the engaging force of the hydraulic engaging element on the disengaging side. In this way, the time until the input and output speed ratio is lowered to the synchronous region can be extended. Therefore, during that period of time, the hydraulic pressure of the hydraulic engaging element on the engaging side can be sufficiently increased to thereby engage the hydraulic engaging element on the engaging side at the time of synchronization. A smooth downshifting can thus be performed.

[0011] In the embodiment to be described hereinafter, what corresponds to the above-described means for detecting speed change developing degree of the rotational speed of the engine are steps S108-4 and S108-5 in FIG. 14. Step S108-4 corresponds to the means for detecting the rotational speed of the input shaft of the transmission at the time of start of downshifting. Step S108-5 corresponds to the means for computing the speed change developing degree. What corresponds to the correcting means for boosting the hydraulic pressure are steps S108-5 and S108-6. $K(etrn)$ corresponds to the above-described ratio of the difference between the rotational speed of the engine at the time of start of downshifting and the reference rotational speed of the engine to the difference between the target rotational speed of the engine and the reference rotational speed of the engine. QDNOFFZO corresponds to the reference correction value and QDNOFFZ corresponds to the boosting correcting value.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] The above and other objects and the attendant advantages of the present invention will become readily apparent by reference to the following detailed description when considered in conjunction with the accompanying drawings wherein:

FIG. 1 is a cross-sectional view of a transmission to which the apparatus of the present invention is applied;
 FIG. 2 is a diagram showing a hydraulic oil circuit of the transmission in FIG. 1;
 FIG. 3 is an enlarged diagram of an important portion of the hydraulic oil circuit;
 FIG. 4 is a block circuit diagram of a control system for solenoid valves provided in the hydraulic oil circuit;
 FIGS. 5A - 5C are diagrams to show the relationship among various monitor values to be used in speed change control and control mode;
 FIG. 6 is a time chart to show the changes in ON pressure, OFF pressure, and "Gratio" at the time of upshifting;
 FIG. 7 is a flow chart to show the control at the time of upshifting;
 FIG. 8 is a flow chart to show the contents of control in step S14 in FIG. 7;
 FIG. 9 is a flow chart to show the contents of control in step S10 in FIG. 7;
 FIG. 10 is a flow chart to show the contents of control in step S10-5 in FIG. 9;
 FIG. 11 is a time chart to show the changes in ON pressure, OFF pressure, and "Gratio" at the time of downshifting;
 FIG. 12 is a flow chart to show the downshifting control;
 FIG. 13A is a graph to show the setting by "Gratio" of a value YGDNS for discriminating the speed change progress condition depending on the vehicle speed;
 FIG. 13B is a graph to show the setting of YGDNS depending on the water temperature;
 FIG. 14 is a flow chart to show the contents of control in step S108 in FIG. 12;
 FIG. 15 is a time chart to show the changes in ON pressure, OFF pressure, and "Gratio" at the time of switchover upshifting;
 FIG. 16 is a flow chart to show the control of switchover upshifting;
 FIG. 17 is a time chart to show the changes in ON pressure, OFF pressure, and "Gratio" at the time of switchover downshifting;
 FIG. 18 is a flow chart to show the control of switchover downshifting;
 FIG. 19 is a flow chart to show the shift selection control;
 FIG. 20A is a flow chart to show the enumeration processing of a timer value TMG(N) to be used in the setting processing of flag FGFAIL which is used in the control in FIG. 19;
 FIG. 20B is a flow chart to show the setting processing of FGFAIL;
 FIG. 21A is a graph to show the principle of setting FLOCK to be used in the control of FIG. 19A;
 FIG. 21B is a flow chart to show the setting processing of FLOCK;
 FIG. 22 is a time chart to show the changes in ON pressure and "Gratio" at the time of gear-in;
 FIG. 23 is a flow chart to show the in-gear control;
 FIG. 24 is a flow chart to show an example of selecting processing of speed change map;
 FIG. 25A is a flow chart to show another example of selecting processing of speed change map;

FIG. 25B is a flow chart to show the setting processing of flag FREV to be used in the processing in FIG. 25A;
 FIG. 26 is a flow chart to show the control during and after initialization of ECU; and
 FIG. 27 is a flow chart to show the setting processing of FTBD to be used in the control in FIG. 12.

DETAILED DESCRIPTION OF A PREFERRED EMBODIMENT

[0013] With reference to FIG. 1, numeral 1 denotes a hydraulically operated vehicular transmission for carrying out speed changing of four forward transmission trains and one reverse transmission train. The transmission 1 is provided with an input shaft 3 which is connected to an engine via a fluid torque converter 2; an intermediate shaft 5 which is always connected to the input shaft 3 via a gear train 4; and an output shaft 7 having a shaft end output gear 7a which is engaged with a final gear 6a on a differential 6 which is connected to driving wheels of a vehicle such as a motor vehicle. In the figure, the final gear 6a and the output gear 7a are illustrated in a manner separated from each other. This is because the figure is drawn in a development view, and both the gears 6a, 7a are actually in mesh with each other.

[0014] A first speed transmission train G1 and a second speed transmission train G2 are provided in parallel between the intermediate shaft 5 and the output shaft 7.

[0015] A third speed transmission train G3, and a fourth speed transmission train G4 and a reverse transmission train GR are provided in parallel between the input shaft 3 and the output shaft 7. On the intermediate shaft 5 there are provided a first speed hydraulic clutch C1 and a second speed clutch C2, which are both defined as hydraulic engaging elements, interposed in the first speed and the second speed transmission trains G1, G2, respectively. On the input shaft 5 there are provided a third speed hydraulic clutch C3 and a fourth speed hydraulic clutch C4, both of which are defined as hydraulic engaging elements, interposed in the third speed and the fourth speed transmission trains G3, G4, respectively. It is thus so arranged that, when each of the hydraulic clutches C1, C2, C3, C4 is engaged, the corresponding transmission train G1, G2, G3, G4 can be selectively established. The reverse transmission train GR is constituted or arranged to commonly use the fourth speed hydraulic clutch C4 with the fourth transmission train G4. By a switching (or changeover) operation of a selector gear 8 on the input shaft 7 between a forward running (or a forward drive) side on the left side as seen in FIG. 1 and a reverse running (or a reverse drive) side on the right side therein, the selector gear 8 is engaged with a driven gear G4a, GRa of the fourth speed transmission train G4 and the reverse transmission train GR, respectively. The fourth speed transmission train G4 and the reverse transmission train GR are thus selectively established. In the reverse transmission train GR, an idle gear (not illustrated) is interposed.

Reference numeral 9 in the figure denotes a parking gear provided on the output shaft 7.

[0016] Supply and discharge of hydraulic oil to and from each of the above-described hydraulic clutches C1 - C4 are controlled by a hydraulic circuit as shown in FIG. 2. The hydraulic circuit is provided with: a hydraulic pressure source 10 which is made up of a gear pump driven by the engine via a casing of the fluid torque converter 2; a manual valve 11 which is operated for switching in interlocking with a selector lever inside a vehicle compartment; a shift valve unit 12; a changeover valve 13 on an upstream side of the shift valve unit 12; a pair of first and second pressure regulating valves 14₁, 14₂ which are connected to the changeover valve 13; a servo valve 15 which switches between the forward running and the reverse running and to which is connected a fork 8a to be engaged with the selector gear 8; three sets of first through third solenoid valves 16₁, 16₂, 16₃ for controlling to switch the shift valve unit 12 and the changeover valve 13; and a pair of first and second solenoid proportional valves 17₁, 17₂ for controlling to regulate the hydraulic pressure in the first and the second pressure regulating valves 14₁, 14₂. Reference numerals A1 through A4 denote accumulators provided to absorb sudden pressure changes in each of the hydraulic clutches C1 through C4, respectively.

[0017] The manual valve 11 is switchable to a total of seven positions (or ranges), i.e., a parking position "P", a reverse position "R", a neutral position "N", an automatic speed changing position "D₄" for the first through the fourth speeds, an automatic speed changing position "D₃" for the first through the third speeds, a second speed retaining position "2", and a first speed retaining position "1".

[0018] In the "D₄" position of the manual valve 11, No. 1 oil passage L1 which is in communication with the hydraulic pressure source 10 is connected to No. 2 oil passage L2 which is in communication with the changeover valve 13. Pressurized hydraulic oil that has been regulated by a regulator 18 to a certain line pressure is supplied from No. 1 oil passage L1 to No. 2 oil passage L2. This pressurized oil is selectively supplied to the first speed through the fourth speed hydraulic clutches C1 through C4 via the changeover valve 13 and the shift valve unit 12 to thereby carry out the speed changing of the first speed through the fourth speed. Detailed explanations will be made hereinafter about the shift valve unit 12, the changeover valve 13, and the pressure regulating valves 14₁, 14₂ with reference to FIG. 3.

[0019] The shift valve unit 12 is constituted by three sets of first through third shift valves 12₁, 12₂, 12₃. The first shift valve 12₁ is connected to the changeover valve 13 via two, i.e., No. 3 and No. 4, oil passages L3, L4. The second shift valve 12₂ is connected to the changeover valve 13 via two, i.e., No. 5 and No. 6, oil passages L5, L6. The first and the second shift valves 12₁, 12₂ are connected to each other via three, i.e., No. 7 through No. 9, oil passages L7, L8, L9. Further, the third shift valve 12₃ is connected to the first shift valve 12₁ via two, i.e., No. 10 and No. 11, oil passages

L10, L11 and is also connected to the second shift valve 12₂ via No. 12 oil passage L12.

[0020] The first speed hydraulic clutch C1 is connected to the second shift valve 12₂ via No. 13 oil passage L13. The second speed hydraulic clutch C2 is connected to the first shift valve 12₁ via No. 14 oil passage L14. The third speed hydraulic clutch C3 is connected to the second shift valve 12₂ via No. 15 oil passage L15. The fourth speed hydraulic clutch C4 is connected to the first shift valve 12₁ via No. 17 oil passage L17 which is connected, in the "D₄", "D₃", "2" and "1" positions of the manual valve 11, to No. 16 oil passage L16 that is connected to the fourth speed hydraulic clutch C4.

[0021] The first shift valve 12₁ is urged to the right position by a spring 12_{1a} and is also urged to the left position by the hydraulic pressure in No. 18 oil passage L18 which is controlled by the first solenoid valve 16₁. The second shift valve 12₂ is urged to the right position by a spring 12_{2a} and is also urged to the left position by the hydraulic pressure in No. 19 oil passage L19 which is controlled by the second solenoid valve 16₂. The third shift valve 12₃ is urged to the right by a spring 12_{3a} and is also urged to the left by the hydraulic pressure in No. 21 oil passage L21 which is connected to No. 1 oil passage L1 in a position of the manual valve 11 other than the "2" and "1" positions. In the "D₄" position of the manual valve 11, the third shift valve 12₃ is held or retained in the left position by the line pressure to be inputted via No. 21 oil passage L21 so that No. 10 oil passage L10 is connected to an oil discharge port 12_{3b} of the third shift valve 12₃, and No. 11 oil passage L11 and No. 12 oil passage L12 are connected together.

[0022] At the time of the first speed running (or the first speed drive) in the "D₄" position of the manual valve 11, the first shift valve 12₁ is switched to the left position and the second shift valve 12₂ is switched to the right position. According to these operations, No. 13 oil passage L13 for the first speed hydraulic clutch C1 is connected to No. 4 oil passage L4 which is defined as a second connecting oil passage to the changeover valve 13. At this time, No. 14 oil passage L14 for the second speed hydraulic clutch C2 is connected to that oil discharge port 12_{3b} of the third shift valve 12₃ which is defined as an oil discharge passage, via the first shift valve 12₁ and No. 10 oil passage L10. No. 15 oil passage L15 for the third speed hydraulic clutch C3 is connected to that oil discharge port 12_{2b} of the second shift valve 12₂ which is defined as an oil discharge passage. No. 16 oil passage L16 for the fourth speed hydraulic clutch C4 is connected to No. 6 oil passage L6, which is defined as a fourth connecting oil passage to the changeover valve 13, via No. 17 oil passage L17, the first shift valve 12₁, No. 11 oil passage L11, the third shift valve 12₃, No. 12 oil passage L12, and the second shift valve 12₂.

[0023] At the time of the second speed running, the first shift valve 12₁ is switched to the right position while holding the second shift valve 12₂ in the right position. According to these operations, No. 14 oil passage L14 for the second speed hydraulic clutch C2 is connected to No. 5 oil passage L5, which is defined as a third connecting oil passage to the changeover valve 13, via the first shift valve 12₁, No. 9 oil passage L9, and the second shift valve 12₂. No. 13 oil passage L13 for the first speed hydraulic clutch C1 is connected to No. 3 oil passage L3, which is defined as a first connecting oil passage to the changeover valve 13, via the second shift valve 12₂, No. 8 oil passage L8, and the first shift valve 12₁. At this time, No. 15 oil passage L15 for the third speed hydraulic clutch C3 is connected to the oil discharge port 12_{2b} of the second shift valve 12₂ like at the time of the first speed running. No. 16 oil passage L16 for the fourth speed hydraulic clutch C4 is connected to that oil discharge port 12_{1b} of the first shift valve 12₁ which is defined as a discharge oil passage, via No. 17 oil passage L17.

[0024] At the time of the third speed running, the second shift valve 12₂ is switched to the left position while holding the first shift valve 12₁ in the right position. According to these operations, No. 15 oil passage L15 for the third speed hydraulic clutch C3 is connected to No. 4 oil passage L4 via the second shift valve 12₂, No. 7 oil passage L7 and the first shift valve 12₁. No. 14 oil passage L14 for the second speed hydraulic clutch C2 is connected to No. 6 oil passage L6 via the first shift valve 12₁, No. 9 oil passage L9 and the second shift valve 12₂. At this time, No. 13 oil passage L13 for the first speed hydraulic clutch C1 is connected to the oil discharge port 12_{2b} of the second shift valve 12₂. No. 16 oil passage L16 for the fourth hydraulic clutch C4 is connected to the oil discharge port 12_{1b} of the first shift valve 12₁ via No. 17 oil passage L17, like at the time of the second speed running.

[0025] At the time of the fourth speed running, the first shift valve 12₁ is switched to the left position while holding the second shift valve 12₂ in the left position. According to these operations, No. 16 oil passage L16 for the fourth speed hydraulic clutch C4 is connected to No. 5 oil passage L5 via No. 17 oil passage L17, the first shift valve 12₁, No. 11 oil passage L11, the third shift valve 12₃, No. 12 oil passage L12 and the second shift valve 12₂. No. 15 oil passage L15 for the third speed hydraulic clutch C3 is connected to No. 3 oil passage L3 via the second shift valve 12₂, No. 7 oil passage L7 and the first shift valve 12₁. At this time, No. 13 oil passage L13 for the first speed hydraulic clutch C1 is connected to the oil discharge port 12_{2b} of the second shift valve 12₂, like at the time of the third speed running. No. 14 oil passage L14 for the second speed hydraulic clutch C2 is connected to the oil discharge port 12_{3b} of the third shift valve 12₃ via the first shift valve 12₁ and No. 10 oil passage L10, like at the time of the first speed running.

[0026] To the changeover valve 13 there are connected: No. 2 oil passage L2 which is defined as an oil passage at a line pressure; No. 3 through No. 6 oil passages L3, L4, L5, L6 as the first through the fourth connecting oil passages; No. 22 oil passage L22 which is defined as a first pressure-regulated oil passage whose pressure is regulated by the first pressure regulating valve 14₁; and No. 23 oil passage L23 which is defined as a second pressure-regulated oil

passage whose pressure is regulated by the second pressure regulating valve 14₂. The changeover valve 13 is urged to the right position, which is defined as a first switchover position, by a predetermined pressure lower than the line pressure (hereinafter called a modulator pressure) which is outputted to No. 24 oil passage L24 on the downstream side of a modulator valve 19 which is connected to No. 1 oil passage L1. The changeover valve 13 is urged to the left position, which is defined as a second switchover position, by a spring 13a and the hydraulic pressure in No. 20 oil passage L20 to be controlled by the third solenoid valve 16₃.

[0027] When the changeover valve 13 is in the right position, No. 3 oil passage L3 is connected to No. 22 oil passage L22, and No. 5 oil passage L5 is connected to No. 23 oil passage L23. Therefore, it becomes possible to regulate the hydraulic pressure in each of No. 3 and No. 5 oil passages L3, L5 by the first and the second pressure regulating valves 14₁, 14₂, respectively. At this time, No. 4 oil passage L4 is connected to No. 2 oil passage L2, and No. 6 oil passage L6 is connected to that oil discharge port 13b of the changeover valve 13 which is defined as an oil discharge passage.

[0028] When the changeover valve 13 is in the left position, No. 4 oil passage L4 is connected to No. 22 oil passage L22, and No. 6 oil passage L6 is connected to No. 23 oil passage L23. Therefore, it becomes possible to regulate the hydraulic pressure in each of No. 4 and No. 6 oil passages L4, L6 by the first and the second pressure regulating valves 14₁, 14₂, respectively. At this time, No. 3 oil passage L3 is connected to that oil discharge port 13c of the changeover valve 13 which is defined as the oil discharge passage, and No. 5 oil passage L5 is connected to No. 2 oil passage L2.

[0029] At the time of the first speed in which the first shift valve 12₁ is in the left position, the second shift valve 12₂ is in the right position, and the first speed hydraulic clutch C1 is connected to No. 4 oil passage L4, the changeover valve 13 is switched and held in the right position, and No. 4 oil passage L4 is connected to No. 2 oil passage L2. In this way, the hydraulic pressure in the first speed hydraulic clutch C1 (hereinafter called a first speed pressure) becomes the line pressure, whereby the first speed transmission train G1 is established through the engagement of the first speed hydraulic clutch C1.

[0030] At the time of the second speed in which both the first and the second shift valves 12₁, 12₂ are in the right position, and the first speed hydraulic clutch C1 is connected to No. 3 oil passage L3, and the second speed hydraulic clutch C2 is connected to No. 5 oil passage L5, respectively, the changeover valve 13 is switched and held in the left position, No. 3 oil passage L3 is connected to the oil discharge port 13c, and No. 5 oil passage L5 is connected to No. 2 oil passage L2. In this manner, the first speed pressure is lowered to the atmospheric pressure to thereby release the engagement of the first speed hydraulic clutch C1. On the other hand, the hydraulic pressure in the second speed hydraulic clutch C2 (hereinafter called a second speed pressure) becomes the line pressure, whereby the second speed transmission train G2 is established through the engagement of the second speed hydraulic clutch C2.

[0031] At the time of upshifting from the first speed to the second speed, both the first and the second shift valves 12₁, 12₂ are first switched to the condition of the second speed while holding the changeover valve 13 in the position at the time of the first speed, i.e., in the right position. In this case, No. 3 and No. 5 oil passages L3, L5 to be connected to the first and the second speed hydraulic clutches C1, C2, respectively, are connected to No. 22 and No. 23 oil passages L22, L23, respectively. Therefore, it becomes possible to control the pressure drop characteristics of the first speed pressure by the first pressure regulating valve 14₁ and to control the pressure rise characteristics of the second speed pressure by the second pressure regulating valve 14₂, whereby a smooth upshifting from the first speed to the second speed can be carried out. After the speed changing has been completed, the changeover valve 13 is switched to the left position. Hydraulic oil is discharged from the first speed hydraulic clutch C1 without passing through the first pressure regulating valve 14₁, and the second speed hydraulic clutch C2 is supplied with pressurized oil at the line pressure without passing through the second pressure regulating valve 14₂.

[0032] At the time of downshifting from the second speed to the first speed, the changeover valve 13 is first switched from the position at the time of the second speed to the position at the time of the first speed, i.e., from the left position to the right position, while holding both the shift valves 12₁, 12₂ to the condition at the time of the second speed. According to these operations, like at the time of upshifting from the first speed to the second speed, both the first speed and the second speed hydraulic clutches C1, C2 are connected to No. 22 and No. 23 oil passages L22, L23, respectively. Therefore, it becomes possible to control the pressure rise characteristics of the first speed pressure by the first pressure regulating valve 14₁, and to control the pressure drop characteristics of the second speed pressure by the second pressure regulating valve 14₂, whereby a smooth downshifting from the second speed to the first speed can be carried out. After the speed changing has been completed, both the first and the second shift valves 12₁, 12₂ are switched to the condition of the first speed running. The second speed hydraulic clutch C2 is connected to the oil discharge port 12_{3b} of the third shift valve 12₃. The hydraulic oil is thus discharged from the second speed hydraulic clutch C2 without passing through the second pressure regulating valve 14₂. And the first speed hydraulic clutch C1 is supplied with the pressurized oil at the line pressure without passing through the first pressure regulating valve 14₁ like at the time of the first speed.

[0033] At the time of the third speed in which the first shift valve 12₁ is in the right position, the second shift valve 12₂ is in the left position, the second speed hydraulic clutch C2 is connected to No. 6 oil passage L6, and the third speed hydraulic clutch C3 is connected to No. 4 oil passage L4, respectively, the changeover valve 13 is switched and

held in the right position. Like at the time of the first speed running, No. 6 oil passage L6 is connected to the oil discharge port 13b and No. 4 oil passage L4 is connected to No. 2 oil passage L2. In this manner, the second speed pressure is lowered to the atmospheric pressure and the engagement of the second speed hydraulic clutch C2 is thereby released. On the other hand, the hydraulic pressure in the third speed hydraulic clutch C3 (hereinafter called a third speed pressure) becomes the line pressure, whereby the third speed transmission train G3 is established through the engagement of the third speed hydraulic clutch C3.

[0034] At the time of upshifting from the second speed to the third speed, both the first and the second shift valves 12₁, 12₂ are switched to the condition of the third speed while holding the changeover valve 13 in the position of the second speed running, i.e., in the left position. In this case, No. 4 and No. 6 oil passages L4, L6 to be connected to the third and the second speed hydraulic clutches C3, C2 are connected to No. 22 and No. 23 oil passages L22, L23, respectively. Therefore, it becomes possible to control the pressure rise characteristics of the third speed pressure by the first pressure regulating valve 14₁ and to control the pressure drop characteristics of the second speed pressure by the second pressure regulating valve 14₂. Therefore, a smooth upshifting from the second speed to the third speed can be carried out. After the speed changing has been completed, the changeover valve 13 is switched to the right position. The hydraulic oil is discharged from the second speed hydraulic clutch C2 without passing through the second pressure regulating valve 14₂, and the third speed hydraulic clutch C3 is supplied with the pressurized oil at the line pressure without passing through the first pressure regulating valve 14₁.

[0035] At the time of downshifting from the third speed to the second speed, the changeover valve 13 is first switched from the position at the time of the third speed to the position at the time of second speed, i.e., from the right position to the left position, while holding both the first and the second shift valves 12₁, 12₂ to the condition of the third speed. According to these operations, like at the time of upshifting from the second speed to the third speed, both the third speed and the second speed hydraulic clutches C3, C2 are connected to No. 22 and No. 23 oil passages L22, L23, respectively. Therefore, it becomes possible to control the pressure drop characteristics of the third speed pressure by the first pressure regulating valve 14₁, and to control the pressure rise characteristics of the second speed pressure by the second pressure regulating valve 14₂, whereby a smooth downshifting from the third speed to the second speed can be carried out. After the speed changing has been completed, both the first and the second shift valves 12₁, 12₂ are switched to the condition of the second speed and the third speed hydraulic clutch C3 is connected to the oil discharge port 12_{2b} of the second shift valve 12₂. The hydraulic oil is thus discharged from the third speed hydraulic clutch C3 without passing through the first pressure regulating valve 14₁ and the second speed hydraulic clutch C2 is supplied with the pressurized oil at the line pressure without passing through the second pressure regulating valve 14₂ like at the time of the second speed.

[0036] At the time of the fourth speed in which both the first and the second shift valves 12₁, 12₂ are in the left position, and the third speed hydraulic clutch C3 is connected to No. 3 oil passage L3, and the fourth speed hydraulic clutch C4 is connected to No. 5 oil passage L5, respectively, the changeover valve 13 is switched and held at the left position. Like at the time of second speed, No. 3 oil passage L3 is connected to the oil discharge port 13c, and No. 5 oil passage L5 is connected to No. 2 oil passage L2. In this manner, the third speed pressure is lowered to the atmospheric pressure to thereby release the engagement of the third speed hydraulic clutch C3. On the other hand, the hydraulic pressure in the fourth speed hydraulic clutch C4 (hereinafter called a fourth speed pressure) becomes the line pressure, whereby the fourth speed transmission train G4 is established through the engagement of the fourth speed hydraulic clutch C4.

[0037] At the time of upshifting from the third speed to the fourth speed, both the first and the second shift valves 12₁, 12₂ are switched to the condition of the fourth speed while holding the changeover valve 13 in the position of the third speed, i.e., in the right position. In this case, No. 3 and No. 5 oil passages L3, L5 to be connected to the third and the fourth hydraulic clutches C3, C4 are connected to No. 22 and No. 23 oil passages L22, L23, respectively. Therefore, it becomes possible to control the pressure drop characteristics of the third speed pressure by the first pressure regulating valve 14₁ and to control the pressure rise characteristics of the fourth speed pressure by the second regulating valve 14₂. A smooth upshifting from the third speed to the fourth speed can thus be carried out. After the speed changing has been completed, the changeover valve 13 is switched to the left position. The hydraulic oil is discharged from the third speed hydraulic clutch C3 without passing through the first pressure regulating valve 14₁. And the fourth speed hydraulic clutch C4 is supplied with the oil at the line pressure without passing through the second pressure regulating valve 14₂.

[0038] At the time of downshifting from the fourth speed to the third speed, the changeover valve 13 is first switched from the position at the time of the fourth speed to the position at the time of the third speed, i.e., from the left position to the right position, while holding both the first and the second shift valves 12₁, 12₂ to the condition of the fourth speed. According to these operations, like at the time of upshifting from the third speed to the fourth speed, the third speed and the fourth speed hydraulic clutches C3, C4 are connected to No. 22 and No. 23 oil passages L22, L23, respectively. Therefore, it becomes possible to control the pressure rise characteristics of the third speed pressure by the first pressure regulating valve 14₁, and to control the pressure drop characteristics of the fourth speed pressure by the

second pressure regulating valve 14₂, whereby a smooth downshifting from the fourth speed to the third speed can be carried out. After the speed changing has been completed, both the first and the second shift valves 12₁, 12₂ are switched to the condition of the third speed. The fourth speed hydraulic clutch C4 is connected to the oil discharge port 12_{1b} of the first shift valve 12₁. The hydraulic oil is thus discharged from the fourth speed hydraulic clutch C4 without passing through the second pressure regulating valve 14₂. And the third speed hydraulic clutch C3 is supplied with the pressurized oil at the line pressure without passing through the first pressure regulating valve 14₁.

[0039] Each of the first and the second pressure regulating valves 14₁, 14₂ is urged by each of springs 14_{1a}, 14_{2a} and by the hydraulic pressure in each of No. 22 and No. 23 oil passages L22, L23 to the rightward oil discharge side in which each of No. 22 and No. 23 oil passages L22, L23 is connected to each of the oil discharge ports 14_{1b}, 14_{2b}, respectively. Further, the first and the second pressure regulating valves 14₁, 14₂ are urged by the respective hydraulic pressures in No. 25 and No. 26 oil passages L25, L26 on the output side of each of solenoid proportional valves 17₁, 17₂ to the leftward oil supply side in which No. 22 and No. 23 oil passages L22, L23 are respectively connected to No. 2 oil passages L2. In this manner, the hydraulic pressure in each of No. 22 and No. 23 oil passages L22, L23 is increased or decreased in proportion to the output pressure of each of the solenoid proportional valves 17₁, 17₂. In order to decrease the speed change shocks, it becomes necessary to perform a delicate control of the hydraulic pressure in a transient region of engagement of the hydraulic clutch on the disengaging side and the hydraulic clutch on the engaging side. In this embodiment, after the completion of the speed changing, the hydraulic oil supply to the hydraulic clutch on the engaging side and the hydraulic oil discharge from the hydraulic clutch on the disengaging side are made without passing through the pressure regulating valves 14₁, 14₂. Therefore, the pressure regulating valves 14₁, 14₂ need to bear the hydraulic pressure control only in the transient region of engagement at a relatively low hydraulic pressure. Therefore, the resolution of the pressure control can be made higher and the delicate control of the pressure rise characteristics of the hydraulic clutch on the engaging side and the pressure drop characteristics of the hydraulic clutch on the disengaging side can be performed at a higher accuracy.

[0040] Modulator pressure is inputted into both the first and the second solenoid proportional valves 17₁, 17₂ via No. 24 oil passage L24. Here, as the first solenoid proportional valve 17₁, there is used one in which an output pressure becomes maximum (modulator pressure) at the time of non-energization. As the second solenoid proportional valve 17₂, there is used one in which the output pressure becomes minimum (atmospheric pressure) at the time of non-energization.

[0041] The first solenoid valve 16₁ is constituted by a two-way valve which opens to atmosphere No. 18 oil passage L18 which is connected to No. 24 oil passage L24 via a throttle 16_{1a}. At the time of non-energization thereof, it is closed to thereby change the hydraulic pressure in No. 18 oil passage L18 to a high hydraulic pressure (modulator pressure).

[0042] Each of the second and the third solenoid valves 16₂, 16₃ is constituted by a three-way valve which is switchable between an oil supply position in which No. 19 and No. 20 oil passages L19, L20 on the output side of the respective solenoid valves are connected to No. 24 oil passage L24, and an oil discharge position in which this connection is shut off and connect each of the oil passages L19, L20 to each of oil discharge ports 16_{2a}, 16_{3a}, respectively. At the time of non-energization thereof, it is switched to the oil supply position and change the hydraulic pressure in each of No. 19 and No. 20 oil passages L19, L20 to a high hydraulic pressure (modulator pressure).

[0043] It may also be considered to constitute the second and the third solenoid valves 16₂, 16₃ by a two-way valve like the first solenoid valve 16₁. However, the two-way valve has disadvantages in that an oil leak amount when opened becomes large and that the control response becomes poor because, at a low temperature, there remains a residual hydraulic pressure even when it is opened. Here, at the time of low speed running at the first speed or at the time when the vehicle is stopped, the revolution speed of the engine lowers so that the amount of oil supply from the hydraulic pressure source 10 decreases and, therefore, the oil leak amount must be minimized. In addition, at the first speed, since the second shift valve 12₂ and the changeover valve 13 are moved to the right position, No. 19 and No. 20 oil passages L19, L20 must be made to the atmospheric pressure. If the second and the third solenoid valves 16₂, 16₃ are constituted by two-way valves, the leak amount becomes excessive. In view of the above disadvantages and in view of the fact that the switching operation of the changeover valve 13 that must be switched with a good response is carried out by the third solenoid valve 16₃, the following arrangement has been employed in this embodiment. Namely, the second and the third solenoid valves 16₂, 16₃ are respectively constituted by a three-way valve and, in view of the space, only the first solenoid valve 16₁ is constituted by a small-sized two-way valve.

[0044] In the "D₄" position of the manual valve 11, the state of energization or non-energization of the first through the third solenoid valves 16₁, 16₂, 16₃; the position of the first and the second shift valves 12₁, 12₂; and the output pressures (pressures in No. 22 and No. 23 oil passages L22, L23) of the first and the second pressure regulating valves 14₁, 14₂; at the in-gear time (initial gear engagement), as well as at the first through the fourth speeds are as shown in the table given hereinbelow.

	1st speed	1st ⇌ 2nd speed	2nd speed	2nd ⇌ 3rd speed	3rd speed	3rd ⇌ 4th speed	4th speed
1st sol. valve (16 ₁)	X	0	0	0	0	X	X
2nd sol. valve (16 ₂)	0	0	0	X	X	X	X
3rd sol. valve (16 ₃)	0	0	X	X	0	0	X
1st shift valve (12 ₁)	Left	Right	Right	Right	Right	Left	Left
2nd shift valve (12 ₂)	Right	Right	Right	Left	Left	Left	Left

	1st speed	1st ⇌ 2nd speed	2nd speed	2nd ⇌ 3rd speed	3rd speed	3rd ⇌ 4th speed	4th speed
changeover valve (13)	Right	Right	Left	Left	Right	Right	Left
1st p. reg. valve (14 ₁)	H	H ⇌ L	L	L ⇌ H	H	H ⇌ L	L
2nd p. reg. valve (14 ₂)	L	L ⇌ H	H	H ⇌ L	L	L ⇌ H	H

sol. valve = solenoid valve; p. reg. valve = pressure regulating valve; L = Low; H = High;
 0 = energized; X = not energized

[0045] In this embodiment, between the first and the second pressure regulating valves 14₁, 14₂, the one that functioned as an oil supply pressure regulating valve for boosting the hydraulic pressure in the hydraulic clutch on the engaging side at the time of the last speed changing will function as an oil discharge pressure regulating valve (i.e., a pressure regulating valve for oil discharge) for dropping or lowering the hydraulic pressure in the hydraulic clutch on the disengaging side at the time of the next speed changing. Further, the one that functioned as an oil discharge pressure regulating valve at the time of the last speed changing will function as an oil supply pressure regulating valve (i.e., a pressure regulating valve for oil supply) at the time of the next speed changing. Therefore, the output pressure of each of the pressure regulating valves 14₁, 14₂ can be maintained as it is to thereby make it ready for the next speed changing. On the contrary, if one of the first and the second pressure regulating valves 14₁, 14₂ is used exclusively for oil supply and the other thereof is used exclusively for oil discharge, the following becomes necessary. Namely, the output pressure of the oil supply pressure regulating valve that was boosted at the time of speed changing must be lowered, and also the output pressure of the oil discharge pressure regulating valve that was lowered at the time of speed changing must be boosted to be prepared for the next speed changing. In this case, if the next speed changing is made at a low temperature within a short period of time, the speed changing will start when the pressure dropping of the output pressure in the oil supply pressure regulating valve or the boosting of the output pressure in the oil discharge pressure regulating valve has not been made sufficiently. As a consequence, the hydraulic pressure control at the time of speed changing gets out of order and the speed change shocks are likely to occur. Therefore, it is preferable to use, as in this embodiment, the first and the second pressure regulating valves 14₁, 14₂ alternately for oil supplying and for oil discharging at each speed changing.

[0046] The first through the third solenoid valves 16₁, 16₂, 16₃ as well as the first and the second solenoid proportional valves 17₁, 17₂ are controlled, together with a fourth solenoid valve 16₄ for a lockup clutch which is described later, by an electronic control unit 20 which is made up of a microcomputer as shown in FIG. 4.

[0047] In the electronic control unit (ECU) 20, there are inputted: a signal from a throttle sensor 21 for detecting a throttle opening θ of the engine; a signal from a vehicle speed sensor 22 for detecting the vehicle speed V; a signal from a speed sensor 23 for detecting the rotational speed N_{in} of the input shaft 3 of the transmission; a signal from a speed sensor 24 for detecting the rotational speed N_{out} of the output shaft 7 of the transmission; and a signal from a position sensor 25 for the selector lever.

[0048] In the "D₄" position, a transmission train that suits the present throttle opening θ and the vehicle speed V is selected based on a speed change map for the first through the fourth speeds kept in memory in the ECU 20, thereby carrying out an automatic speed changing of the first through the fourth speeds.

[0049] Also in the "D₃" position, the same oil circuit arrangement applies as that in the "D₄" position. Automatic speed changing of the first through the third speeds is performed based on the speed change map for the first through the third speeds that is stored in the ECU 20.

[0050] In the "2" and "1" positions, a stepwise downshifting to the second speed or to the first speed is carried out based on the second speed map or the first speed map that is stored in the ECU 20. Thereafter, the speed is maintained in the second speed or the first speed. In the "2" and "1" positions, No. 21 oil passage L21 that was connected to No. 1 oil passage L1 is opened to atmosphere. The third shift valve 12₃ can thus become switchable to the right position.

[0051] When the third shift valve 12₃ is switched to the right position, No. 10 oil passage L10 that was connected, in the left position, to the oil discharge port 12_{3b} is connected to No. 12 oil passage L12. And No. 11 oil passage L11 that was connected, in the left position, to No. 12 oil passage L12 is connected to the oil discharge port 12_{3c} of the third shift valve 12₃. No. 10 oil passage L10 and No. 11 oil passage L11 are connected, in the right position of the first shift valve 12₁, to none of the oil passages for the hydraulic clutches. When the first shift valve 12₁ is moved to the right position, the oil circuit arrangement will become the same as that when the first shift valve 12₁ is moved to the right position in the "D₄" position. Therefore, when both the first and the second shift valves 12₁, 12₂ are switched to the right position (a condition of the second speed in the "D₄" position), the hydraulic oil is supplied to the second speed hydraulic clutch C2 to thereby establish the second speed transmission train G2. When the first shift valve 12₁ is moved to the right position and the second shift valve 12₂ is moved to the left position (a condition of the third speed in the "D₃" position), the hydraulic oil is supplied to the third speed hydraulic clutch C3 to thereby establish the third speed transmission train G3.

[0052] On the other hand, when the first shift valve 12₁ is switched to the left position, No. 14 oil passage L14 for the second speed hydraulic clutch C2 is connected to No. 10 oil passage L10, and No. 17 oil passage L17 for the fourth speed hydraulic clutch C4 is connected to No. 11 oil passage L11, respectively, the oil circuit arrangement will therefore become different from that in the "D₄" position. When the first shift valve 12₁ is moved to the left position and the second shift valve 12₂ is moved to the right position (a condition of the first speed in the "D₄" position), No. 13 oil passage L13 for the first speed hydraulic clutch C1 is connected to No. 4 oil passage L4 (this connection is the same as that in the "D₄" position), and No. 14 oil passage L14 for the second speed hydraulic clutch C2 is connected to No. 6 oil passage L6 (in the "D₄" position No. 17 oil passage L17 for the fourth speed hydraulic clutch C4 is connected to No. 6 oil passage L6). When both the first and the second shift valves 12₁, 12₂ are moved to the left position (a condition of the fourth

speed in the "D₄" position), No. 15 oil passage L15 for the third speed hydraulic clutch C3 is connected to No. 3 oil passage L3 (this connection is the same as that in the "D₄" position). No. 14 oil passage L14 for the second speed hydraulic clutch C2 is connected to No. 5 oil passage L5 (in the "D₄" position No. 17 oil passage L17 for the fourth speed hydraulic clutch C4 is connected to No. 5 oil passage L5). No oil supply is therefore made to the fourth speed hydraulic clutch C4.

[0053] Here, the third shift valve 12₃ is arranged to be urged to the left by that output pressure of the second solenoid proportional valve 17₂ which is inputted via No. 26 oil passage L26. However, when the electric power supply to the first through the third solenoid valves 16₁, 16₂, 16₃ as well as to the first and the second solenoid proportional valves 17₁, 17₂ stops at the time of a system failure due to opening of a fuse or the like, both the first and the second shift valves 12₁, 12₂ and the changeover valve 13 are switched to the left position, and also the output pressure of the second solenoid proportional valve 17₂ becomes the atmospheric pressure. The third shift valve 12₃ is thus switched in the "2" and the "1" positions to the right position and switched, in the "D₄" and the "D₃" positions, to the left position by the line pressure from No. 21 oil passage L21. Therefore, in the "1" and the "2" positions, the second speed transmission train G2 is established and, in the "D₄" and the "D₃" positions, the fourth speed transmission train G4 is established, respectively. The vehicle is able to run at the second speed and the fourth speed even at the time of the system failure.

[0054] In the "R" position of the manual valve 11, No. 2 oil passage L2 is opened to the atmosphere. No. 27 oil passage L27 is connected to No. 1 oil passage L1 and the hydraulic oil is supplied to a first oil chamber 15a on the left end of the servo valve 15 via No. 28 oil passage L28 which is connected to No. 27 oil passage L27 via a first servo control valve 27. According to these operations, the servo valve 15 is urged to the rightward reverse running position to thereby switch the selector gear 8 to the reverse running side. Also No. 28 oil passage L28 is connected to No. 29 oil passage L29 via that shaft bore 15b of the servo valve 15 which is communicated with the first oil chamber 15a. The oil passage L29 is connected to No. 16 oil passage L16 which is communicated with the fourth speed hydraulic clutch C4 in the "R" position of the manual valve 11. In this manner, the reverse transmission train GR is established by the hydraulic oil supply to the fourth speed hydraulic clutch C4 and by the switching of the selector gear 8 to the reverse running side.

[0055] The first servo control valve 27 is urged, by the hydraulic pressure in No. 20 oil passage L20 on the output side of the third solenoid valve 16₃ and the hydraulic pressure in No. 25 oil passage L25 on the output side of the first solenoid proportional valve 17₁, to the leftward open side in which No. 27 oil passage L27 and No. 28 oil passage L28 are connected. It is urged by a spring 27a, the hydraulic pressure in No. 2 oil passage L2 and the hydraulic pressure in No. 29 oil passage L29, to the rightward closed side in which the connection between No. 27 oil passage L27 and No. 28 oil passage L28 is shut off and connect No. 28 oil passage L28 to an oil discharge port 27b. In the "D₄", "D₃", "2" or "1" position, by means of the line pressure to be inputted via No. 2 oil passage L2, the first servo control valve 27 is held in the right position even if the output pressures of the third solenoid valve 16₃ and the first solenoid proportional valve 17₁ may both be increased. The oil supply to No. 28 oil passage L28 is thus blocked, and the servo valve 15 is retained in the leftward forward running position by an engaging member 15c, whereby the establishment of the reverse transmission train GR is blocked.

[0056] Further, when the manual valve 11 is switched to the "R" position while the vehicle is running forwards at a speed above a predetermined speed, the output pressures of both the third solenoid valve 16₃ and the first solenoid proportional valve 17₁ are made to be atmospheric pressure. The first servo control valve 27 is thus held in the right position, whereby the hydraulic oil supply to No. 28 oil passage L28, i.e., the establishment of the reverse transmission train GR, is blocked.

[0057] When the manual valve 11 is switched to the "R" position below a predetermined vehicle speed, the output pressure of the first solenoid proportional valve 17₁ is gradually increased to thereby urge the first servo control valve 27 to the leftward open side. As described above, the hydraulic oil is supplied to the fourth speed hydraulic clutch C4 via No. 28 oil passage L28, the servo valve 15 and No. 29 oil passage L29. The first servo control valve 27 is functioned as a pressure regulating valve to thereby control the boosting of the hydraulic pressure in the fourth speed hydraulic clutch C4. Thereafter, the modulator pressure is outputted from the third solenoid valve 16₃ to thereby urge the first servo control valve 27 to the left endmost position, whereby the hydraulic pressure in the fourth speed hydraulic clutch C4 is maintained at the line pressure. Even if the third solenoid valve 16₃ fails while it is kept switched on and consequently its output pressure remains in the atmospheric pressure, the hydraulic pressure required to engage the fourth speed hydraulic clutch C4 can be secured by the output pressure of the first solenoid proportional valve 17₁.

[0058] When the manual valve 11 is switched from the "R" position to the "D₄", "D₃", "2", or "1" position, the line pressure is inputted from No. 30 oil passage L30 which is connected like No. 2 oil passage L2 to No. 1 oil passage L1 in each of the above positions, to a second oil chamber 15d which is present in an intermediate position of the servo valve 15 via the second servo control valve 28 and No. 31 oil passage L31. The servo valve 15 is thus moved to the left and is switched to the forward running position.

[0059] The second servo control valve 28 is urged, by the first speed pressure to be inputted via No. 13 oil passage

L13, the output pressure of the second solenoid valve 16₂ to be inputted via No. 19 oil passage L19, and the output pressure of the second pressure regulating valve 14₂ to be inputted via No. 23 oil passage L23, to the left position in which No. 30 oil passage L30 and No. 31 oil passage L31 are connected. It is urged by a spring 28a and the hydraulic pressure in No. 27 oil passage L27 to the right position in which the connection between No. 30 and No. 31 oil passages L30, L31 is shut off and No. 31 oil passage L31 is connected to an oil discharge port 28b.

[0060] In this manner, in the "R" position, the second servo control valve 28 is surely switched to the right position by the line pressure from No. 27 oil passage L27. After switching the manual valve 11 to the "D₄", "D₃", "2" or "1" position, the second servo control valve 28 is maintained in the right position until the first speed pressure rises to a predetermined value. The inputting of the line pressure to the second oil chamber 15d is thus blocked and the servo valve 15 is retained by an engaging means 15c in the reverse running position. When the first speed pressure has become a predetermined value or above, the second servo control valve 28 is switched to the left position, and the line pressure is inputted to the second oil chamber 15d to thereby switch the servo valve 15 to the forward running position. Therefore, even if the manual valve 11 is switched from the "R" position to the "D₄", "D₃", "2" or "1" position in a condition in which an accelerator pedal is stepped, the rotation in the reverse direction of the output shaft 7 is being restrained, at the time of switching of the servo valve 15, by a torque transmission in the forward (or positive) direction of rotation via the first speed transmission train G1 due to a rise in the first speed pressure. Consequently, the selector gear 8 and a driven gear G4a of the fourth speed transmission train G4 can smoothly be engaged in a condition in which no large relative rotation occurs. Wear of the meshing (or engaging) portions of both the gears 8, G4a can thus be prevented.

[0061] In case of an occurrence of an abnormality in that the second servo control valve 28 is locked in the right position due to an inclusion of a foreign matter or the like, or else the servo valve 15 is locked in the reverse running position even after the servo control valve 28 has been switched to the left position, the selector gear 8 will remain in the reverse running position even if the manual valve 11 is switched from the "R" position to the "D₄", "D₃", "2" or "1" position. If the hydraulic oil is consequently supplied to the fourth speed hydraulic clutch C4, the reverse transmission train GR will thus be established. As a solution, in this embodiment, there are provided No. 32 oil passage L32 which is in communication with the left end oil chamber of the third shift valve 12₃, and No. 33 oil passage L33 which is connected, in the reverse running position of the servo valve 15, to the second oil chamber 15d of the servo valve 15 via a notched groove 15e. It is thus so arranged that No. 32 oil passage L32 can be connected to No. 30 oil passage L30 in the right position of the second servo valve 28 and to No. 33 oil passage L33 in the left position of the second servo valve 28, respectively. According to this arrangement, when the above-described abnormality should occur, the line pressure is inputted to the left end oil chamber of the third shift valve 12₃ via No. 32 oil passage L32. Therefore, the third shift valve 12₃ is switched and held in the right position regardless of the hydraulic pressures in No. 21 oil passage L21 and No. 26 oil passage L26 which both urge the third shift valve 12₃ leftwards, whereby the hydraulic oil supply to the fourth speed hydraulic clutch C4 is blocked.

[0062] Once switched to the left position, the second servo valve 28 is held in the left position by a self-locking force to be generated by a difference in the pressure-receiving area between right and left lands of an annular groove 28c which connects No. 30 oil passage L30 and No. 31 oil passage L31 together. In case, however, the oil level largely varies due to a sudden cornering whereby the hydraulic pressure from the hydraulic pressure source 10 instantly stops or disappears, the second servo control valve 28 may be switched to right position by the force of the spring 28a. In such a case, if the second servo control valve 28 is arranged to be urged leftwards only by the first speed pressure, the second servo control valve 28 will no longer be returned, at the second through the fourth speeds, to the left position even when the hydraulic pressure restores. As a solution, in this embodiment, the second servo control valve 28 is urged to the left position also by the output pressure of the second pressure regulating valve 14₂ that becomes high at the second and the fourth speeds, as well as by the output pressure of the second solenoid valve 16₂ that becomes high at the third and the fourth speeds. At the first through the third speeds, even if the second servo control valve 28 does not return to the left position and the third shift valve 12₃ is switched to the right position by the input of the line pressure from No. 32 oil passage L32, the oil supply to, and discharge from, each of the hydraulic clutches C1 through C4 are not affected. However, at the fourth speed, the hydraulic oil is supplied to the second speed hydraulic clutch C2 and, consequently, the speed is downshifted from the fourth speed to the second speed. Therefore, at the fourth speed, the second servo control valve 28 is urged leftwards by the output pressure of the second pressure regulating valve 14₂ and the output pressure of the second solenoid valve 16₂. Thus, even if one of the output pressures does not rise to a normal value after the restoration of the hydraulic pressure, the second servo control valve 28 is arranged to be surely switched to the left position.

[0063] In the "N" position of the manual valve 11, No. 2 oil passage L2, No. 16 oil passage L16, No. 17 oil passage L17, No. 27 oil passage L27, No. 29 oil passage L29, and No. 30 oil passage L30 are all opened to atmosphere, and all of the hydraulic clutches C1 through C4 are disengaged. Further, in the "P" position, No. 27 oil passage L27 is connected to No. 1 oil passage L1, and the servo valve 15 is switched to the reverse running position by the inputting of the line pressure via the first servo control valve 27 and No. 28 oil passage L28. In the "P" position, however, the

connection between No. 16 oil passage L16 and No. 29 oil passage L29 is shut off to thereby open No. 16 oil passage L16 to atmosphere. There is therefore no possibility that the reverse transmission train GR is established.

[0064] The fluid torque converter 2 contains therein a lock-up clutch 2a. In the hydraulic oil circuit there is provided a lock-up control portion 29 for controlling the operation of the lock-up clutch 2a with the hydraulic oil to be supplied from the regulator 18 via No. 34 oil passage L34 operating as the working oil.

[0065] The lock-up control portion 29 is made up of: a shift valve 30 which controls to switch on and off the lock-up clutch 2a; a changeover valve 31 which switches the engaged condition of the lock-up clutch 2a at the time of being switched on between a locked up condition in which no slipping occurs and a slipping condition; and a pressure regulating valve 32 which controls to increase or decrease the engaging force in the slipping condition.

[0066] The shift valve 30 is switchable between the following two positions, i.e.: a right position in which No. 34 oil passage L34 is connected to No. 35 oil passage L35 which is communicated with a backpressure chamber of the lock-up clutch 2a and in which No. 36 oil passage L36 which is communicated with an internal space of the fluid torque converter 2 is connected, via a throttled portion 30a, to No. 37 oil passage L37 for oil discharge; and a left position in which No. 34 oil passage L34 is connected to No. 38 oil passage L38 which is communicated with the changeover valve 31 and also to No. 36 oil passage L36 via the throttled portion 30a, and in which No. 35 oil passage L35 is connected to No. 39 oil passage L39 which is communicated with the pressure regulating valve 32. The shift valve 30 is controlled by the fourth solenoid valve 16₄. The fourth solenoid valve 16₄ is constituted by a two-way valve which opens to atmosphere No. 40 oil passage L40 which is connected to No. 24 oil passage L24 on the output side of the modulator valve 19 via a throttle 16₄a. The shift valve 30 is urged to the left position by the hydraulic pressure in No. 24 oil passage L24, i.e., by the modulator pressure, and is urged to the right position by a spring 30b and the hydraulic pressure in No. 40 oil passage L40. When the fourth solenoid valve 16₄ is closed and the hydraulic pressure in No. 40 oil passage L40 is boosted to the modulator pressure, the shift valve 30 is switched to the right position. When the fourth solenoid valve 16₄ is opened and the hydraulic pressure in No. 40 oil passage L40 is lowered to the atmospheric pressure, the shift valve 30 is switched to the left position.

[0067] The changeover valve 31 is switchable between the following two positions, i.e., a right position in which No. 41 oil passage L41 which is communicated with the internal space of the fluid torque converter 2 is connected to No. 42 oil passage L42 which is communicated with a left end oil chamber of the pressure regulator valve 32, and a left position in which No. 42 oil passage L42 is opened to atmosphere and in which No. 38 oil passage L38 is connected to No. 36 oil passage L36. The changeover valve 31 is urged to the right position by a spring 31a and is urged to the left position by the hydraulic pressure in No. 43 oil passage L43 which is connected to the right-end oil chamber.

[0068] The pressure regulating valve 32 is switchable between the following two positions, i.e., a right position in which No. 39 oil passage L39 is connected to No. 34 oil passage L34 and in which No. 41 oil passage L41 is connected to No. 37 oil passage L37 via a throttle 32a, and a left position in which the connection between No. 39 oil passage L39 and No. 34 oil passage L34 is shut off and connect No. 39 oil passage L39 to a throttled oil discharge port 32b, and in which the connection between No. 41 oil passage L41 and No. 37 oil passage L37 is shut off. The pressure regulating valve 32 is urged rightwards by a spring 32c and the hydraulic pressure in No. 42 oil passage L42, and is urged leftwards by the hydraulic pressure in No. 39 oil passage L39 and the hydraulic pressure in No. 43 oil passage L43. Here, let the pressure receiving area to receive the hydraulic pressure in No. 39 oil passage L39 and the pressure receiving area to receive the hydraulic pressure in No. 42 oil passage L42 be both s₁, the pressure receiving area to receive the hydraulic pressure in No. 43 oil passage L43 be s₂, the hydraulic pressures in No. 39 oil passage L39, No. 42 oil passage L42 and No. 43 oil passage L43 be Pa, Pb and Pc, respectively, and the urging force of the spring 32c be F. Then, we have

$$s_1 \cdot Pb + F = s_1 \cdot Pa + s_2 \cdot Pc$$

$$Pb - Pa = (s_2 \cdot Pc - F) / s_1$$

The differential pressure between the hydraulic pressure in No. 42 oil passage L42 and the hydraulic pressure in No. 39 oil passage L39 is increased or decreased depending on the hydraulic pressure in No. 43 oil passage L43.

[0069] No. 43 oil passage L43 is connected, in the right position of the changeover valve 31, to No. 25 oil passage L25 on the output side of the first solenoid proportional valve 17₁ and, in the left position of the changeover valve 31, to No. 26 oil passage L26 on the output side of the second solenoid proportional valve 17₂. In this manner, the changeover valve 31 and the pressure regulating valve 32 are controlled by the first solenoid proportional valve 17₁ at the time of the first and the third speeds in which the changeover valve 31 is in the right position, and by the second solenoid proportional valve 17₂ at the time of the second and the fourth speeds in which the changeover valve 31 is in the left position.

[0070] When the shift valve 30 is in the right position, the working oil from No. 34 oil passage L34 is supplied to the back pressure chamber of the lock-up clutch 2a via the shift valve 30 and No. 35 oil passage L35. Also, the internal space of the fluid torque converter 2 is connected to No. 37 oil passage L37 via No. 41 oil passage L41 and the pressure regulating valve 32 as well as via No. 36 oil passage L36 and the throttled portion 30a of the shift valve 30. Due to the oil discharge from the internal space via No. 37 oil passage L37, the internal pressure in the internal space is lowered, whereby the lock-up clutch 2a becomes a condition of being switched off, i.e., in a condition in which the engagement is released.

[0071] When the shift valve 30 is switched to the left position, the back pressure chamber of the lock-up clutch 2a is connected to No. 39 oil passage L39 via No. 35 oil passage L35 and the shift valve 30. While the changeover valve 31 is in the right position, the internal space of the fluid torque converter 2 is connected to No. 34 oil passage L34 via No. 36 oil passage L36 and the throttled portion 30a of the shift valve 30, as well as to No. 42 oil passage L42 via No. 41 oil passage L41 and the changeover valve 31. The differential pressure between the internal pressure in the internal space and the internal pressure in the back pressure chamber can be controlled for increase or decrease by that hydraulic pressure in No. 43 oil passage L43 which is inputted to the pressure regulating valve 32. In this manner, the lock-up clutch 2a is engaged, in a slipping condition, with an engaging force corresponding to the output pressure of the first solenoid proportional valve 17₁ or the second solenoid proportional valve 17₂.

[0072] When the hydraulic pressure in No. 43 oil passage L43 has become a predetermined value and above whereby the changeover valve 31 is switched to the left position, No. 42 oil passage L42 is opened to atmosphere and consequently the pressure regulating valve 32 is switched to, and retained in, the left position. The back pressure chamber of the lock-up clutch 2a thus remains connected to the oil discharge port 32b of the pressure regulating valve 32 via No. 35 oil passage L35, the shift valve 30, and No. 39 oil passage L39. On the other hand, the hydraulic oil is supplied from No. 34 oil passage L34 to the internal space of the fluid torque converter 2 via the shift valve 30, No. 38 oil passage L38, the changeover valve 31, and No. 36 oil passage L36. Further, since the connection between No. 41 oil passage L41 and No. 37 oil passage L37 is shut off by the switching of the pressure regulating valve 32 to the left position, the internal pressure inside the internal space is maintained at a relatively high pressure that is set by a check valve 33 which is connected to No. 41 oil passage L41. The lock-up clutch 2a is thus engaged in the locked up condition.

[0073] In the figure, numeral 34 denotes an oil cooler interposed in No. 37 oil passage L37, numeral 35 denotes a check valve for the oil cooler, numeral 36 denotes a throttle member which is interposed in a lubricating oil passage LB which supplies leaked oil from the regulator 18 to lubricated portions in each of the shafts 3, 5, 7 of the transmission.

[0074] Explanation will now be made about the control of the first and the second solenoid proportional valves 17₁, 17₂ at the time of speed changing. In the following explanations, the following definitions are used. Namely, the output pressure of the solenoid proportional valve which controls the hydraulic pressure of the hydraulic clutch on the engaging side to be engaged at the time of speed changing is defined to be an ON pressure. The output pressure of the solenoid proportional valve which controls the hydraulic pressure of the hydraulic clutch on the disengaging side to be disengaged or released at the time of speed changing is defined to be an OFF pressure.

[0075] The speed change control is largely classed into an upshifting control, a downshifting control, and an in-gear control (i.e., a control of gear-in or of gear engagement) at the beginning of switching from the "P" or "N" range (position) to the "D₄", "D₃", "2", "1" or "R" range. These controls are performed in the following manner by using the following values: i.e., proportional valve monitor values MAT which represent, as shown in FIG. 5A, the relationship in magnitude (high or low) of the output pressures of the first solenoid proportional valve 17₁ and the second solenoid proportional valve 17₂, and the control modes during the in-gear control; upshifting monitor values MUP which represent, as shown in FIG. 5B, the control modes of the ON pressure and the control modes of the OFF pressure at the time of upshifting; and downshifting monitor values MDN which represent, as shown in FIG. 5C, the control modes of the ON pressure and the control modes of the OFF pressure at the time of downshifting.

[0076] The upshifting control is performed in the procedures shown in FIG. 7. Details of this upshifting control will now be explained with reference to FIG. 6 which schematically shows the changes in the ON pressure, the OFF pressure, and the input and output speed ratio "Gratio" (Nout/Nin) of the transmission, respectively, at the time of upshifting. The "Gratio" may vary or fluctuate slightly depending on the pulsations in the speed detecting pulses, noises, or the like. However, when a hydraulic clutch has completely been engaged, "Gratio" will fall within a range between a predetermined upper limit value YG(N)H and a lower limit value YG(N)L which are based on a gear ratio of each speed stage.

[0077] The upshifting control is started when a speed stage designation signal SH which designates a speed stage to be established is switched to a signal which designates a higher speed stage G(N + 1) than the speed stage G(N) that is now being established. In the upshifting control, MAT is first set to "A, B" in step S1. Once MAT has thus been set, the first and the second shift valves 12₁, 12₂ are switched to a condition in which the upshifting can be made. Then, in step 2; a discrimination is made whether the value (MUP(ON)) on the side of ON of MUP is "0" or not. MUP is initially set to "0,0" and, after making a judgement of "YES" in step S2, the program (or process) proceeds to step S3. In step S3, the remaining time TM of a subtractive timer (subtraction type of timer) built in the electronic control

circuit 20 is set to a predetermined initial value TMST. Also, in step S4, initial setting is made of various kinds of values to be used in the operation (or computation) of the ON pressure and the OFF pressure. Then, in step S5, a setting of $MUP(ON) = 1$ is made. Further, in step S6, a standard (or reference) value QUPONA of the ON pressure in a response pressure mode is computed (S6). The response pressure mode is a control mode in which a play of a piston in a hydraulic clutch on the engaging side is removed to thereby perform a subsequent clutch pressure increase with a good response. The value QUPONA is set to an appropriate value according to the vehicle speed and the throttle opening, and decreases with the lapse of time.

[0078] Then, the program proceeds to step S7, in which a check is made of a value of a flag FTIP which is set to "1" at the time of manual speed changing, i.e., at the time of speed changing by switching the ranges, or at the time of speed changing by lever operation in a transmission in which a step-wise speed changing (i.e., one speed stage at a time) by a lever operation is enabled. If $FTIP = 0$, the program proceeds to step S8, in which the processing is performed of setting QUPON which is a command value of the ON pressure to QUPONA. If $FTIP = 1$, the program proceeds to step S9, in which a processing is performed of setting QUPON to a value which is obtained by adding a predetermined boosting correction value QUPONX to QUPONA (S9). After the processing in steps S8 and S9, the program proceeds to step S10, in which a processing is performed of computing a command value QUPOFF of the OFF pressure, which is described in detail hereinafter. Then, the program proceeds to step S11, in which the following processing of selecting the proportional valves is performed. Namely, a command value of the output pressure of that solenoid proportional valve, between the first and the second solenoid proportional valves 17₁, 17₂, which controls the hydraulic pressure of the hydraulic clutch on the engaging side in the speed changing at this time is made to be QUPON, and a command value of the output pressure of the solenoid proportional valve which controls the hydraulic pressure of the hydraulic clutch on the disengaging side is made to be QUPOFF. The first upshifting control processing is thus completed.

[0079] In the next upshifting control processing, since the setting of $MUP(ON) = 1$ has already been made in step S5 last time, a judgement of "NO" is made in step S2. At this time, the program proceeds to step S12 and a discrimination is made whether or not the time of lapse from the start of the upshifting (TMST~TM) has reached a predetermined time YTMUP1. The time YTMUP1 is set longer than an ordinary time required for upshifting. When $TMST \sim TM \geq YTMUP1$, a judgement is made that an upshifting control has failed, and the program proceeds to step S13. In step S13, a processing to complete the upshifting in which MAT is set to "A,0" (at the time of upshifting from the second speed to the third speed), or to "0,B" (at the time of upshifting other than from the second speed to the third speed), and MUP is set to "0,0", and also TM is reset to zero is performed. When MAT is set to "A,0" or "0,B" in this processing, the changeover valve 13 is switched to a position which is different from the present position, whereby the hydraulic pressure in the hydraulic clutch on the engaging side becomes the line pressure and the hydraulic pressure of the hydraulic clutch on the disengaging side becomes atmospheric pressure.

[0080] If $TMST - TM < YTMUP1$, the program proceeds to step S14 to judge whether the preparation for engagement of the hydraulic clutch on the engaging side (ON clutch) has been made or not. Details of this processing are shown in FIG. 8. First, a discrimination is made in step S14-1 whether or not MUP is "1,1" or "1,2". If the result of the discrimination is "YES", the program proceeds to step S14-2. In step S14-2, a discrimination is made whether "Gratio" has fallen below that lower limit value YG(N)L for judging the clutch engagement which is set based on the gear ratio of the speed stage established before speed changing. If "Gratio" < YG(N)L, the program proceeds to step S14-3, in which a flag FCOFFS to be reset to "0" in the above-described step S4 is set to "1". Then, in step S14-4, a discrimination is made whether MUP is "2,2" or not. If the result of this discrimination is "YES", the program proceeds to step S14-5 to discriminate whether FCOFFS = 1 or not. If FCOFFS = 1, a discrimination is made in step S14-6 whether the throttle opening θ exceeds a predetermined value Y θ CONOK or not. If $\theta > Y\theta$ CONOK, the program proceeds to step S14-7, in which a discrimination is made whether "Gratio" exceeds a predetermined value YGCONOK which is set a little larger than YG(N)L. If "Gratio" > YGCONOK, the program proceeds to step S14-8, in which a flag FCONOK to be reset to "0" in step S4 is set to "1". In case $\theta \leq Y\theta$ CONOK or "Gratio" \leq YGCONOK, the program proceeds to step S14-9, in which FCONOK is reset to "0".

[0081] It is when slipping has occurred in the hydraulic clutch on the disengaging side by the control of the OFF pressure in a subtraction mode, which is described hereinafter, that the condition of "Gratio" < YG(N)L is satisfied when MUP is "1,1" or "1,2". Further, it is when the hydraulic clutch on the engaging side has begun to secure an engaging force, i.e., when the preparation for engaging the hydraulic clutch on the engaging side has been completed by the control of the ON pressure in an addition mode, which is described hereinafter, that the condition of "Gratio" > YGCONOK is satisfied when MUP is "2,2". If the condition of "Gratio" < YG(N)L is not satisfied when MUP is "1,1" or "1,2", then FCOFFS is not set to "1". In this case, even if the condition of "Gratio" > YGCONOK has been satisfied when MUP is "2,2", FCONOK remains to be zero (FCONOK = 0).

[0082] The degree of change in the engine output torque with the degree of throttle opening becomes large in a small throttle opening region. When the throttle opening becomes small, the output torque largely decreases. As a consequence, the slipping of the hydraulic clutch on the disengaging side decreases to thereby sometimes satisfy the condition of "Gratio" > YGCONOK. Therefore, in the small throttle opening region in which $\theta \leq Y\theta$ CONOK, FCONOK

is made to be zero ($FCONOK = 0$), and the setting of $FCONOK$ based on "Gratio" is made only in the medium/large throttle opening region in which the output torque does not largely vary. The setting of $FCONOK = 1$ is thus prevented when the preparation for engagement of the hydraulic clutch on the engaging side has not been made yet.

[0083] After having made the processing of judging whether the preparation for engagement of the hydraulic clutch on the engaging side has been made or not as described above, a discrimination is made in step S15 whether $MUP(ON) = 1$ or not. Since in the second upshifting control processing, $MUP(ON)$ has already been set to 1 ($MUP(ON) = 1$), a judgement of "YES" is made in step S15. The program proceeds to step S16, in which a discrimination is made whether the time of lapse from the start of upshifting ($TMST - TM$) has reached a predetermined time $YTMUP2$ or not. If $TMST - TM < YTMUP2$, the program proceeds to S5 and following steps (i.e., steps that follow). When $TMST - TM \geq YTMUP2$, the program proceeds to step S17, in which the value of MUP on the ON side is set to "2". Then, $\Delta QUPONA$ is set to a relatively small value in step S18' and the program proceeds to step S18, in which an adding processing is performed to make $QUPONA$ to a value which is obtained by adding $\Delta QUPONA$ to the preceding value of $QUPONA$. The program then proceeds to step S7 and following steps. In this manner, a control in the addition mode to increase stepwise the ON pressure is started.

[0084] When a setting of $MUP(ON) = 2$ is made in step S17, a determination of "NO" is made in step S15 in the next upshifting control processing. The program thus proceeds to step S19, in which a discrimination is made whether $MUP(ON) = 2$ or not. Here, a discrimination of "YES" is made and the program proceeds to step S20, in which a discrimination is made whether "Gratio" has exceeded that upper limit value $YG(N)H$ for judging the engagement of the hydraulic clutch which is set based on the gear ratio of the speed stage established before speed changing. Then, if "Gratio" $< YG(N)H$, the program proceeds to step S21 to discriminate whether $FCONOK = 1$ or not. If $FCONOK = 0$, the program proceeds to step S17 and following steps to continue the control in the addition mode.

[0085] If $FCONOK = 1$, the value of TM at that time is stored in step S22 as $TMSTA$. Then, after setting MUP to "3,3" in step S23, the program proceeds to step S25 and following steps. In the next upshifting control processing, a determination of "NO" is made in step S19. The program thus proceeds to step S24, in which a discrimination is made whether $MUP(ON) = 3$ or not, and a discrimination of "YES" is made therein. At this time, $YTMUP3$ is set in step S25, and the program then proceeds to step S26, in which a discrimination is made whether the time of lapse from the time when $CONOK = 1$ has been attained, i.e., from the time when the preparation for engagement of the hydraulic clutch on the engaging side has been completed ($TMSTA - TM$) has reached $YTMUP3$ or not. The value $YTMUP3$ is set to a table value which has the vehicle speed V as a parameter, such that $YTMUP3$ becomes longer with the increase in the vehicle speed. While $TMSTA - TM < YTMUP3$, $\Delta QUPONA$ is set to a relatively large value in step S18", and the program proceeds to step S18 and following steps. The control in the addition mode is thus continued.

[0086] When $TMSTA - TM \geq YTMUP3$, the program proceeds to step S27, in which a discrimination is made whether $FTIP = 1$ or not. If $FTIP = 0$, the program proceeds to step S28, in which a reference value $QUPONB$ of the ON pressure in a bottom up mode is set to a value which is obtained by adding to the final value of $QUPONA$ a value $QUPONBO$ to be obtained depending on the vehicle speed and the throttle opening. If $FTIP = 1$, the program proceeds to step S29, in which $QUPONB$ is set to a value which is obtained by further adding to the above-described value a predetermined boosting correction value $QUPONY$. The value $QUPONY$ is set to a value which is smaller than the boosting correction value $QUPONX$ to be added in step S9. When the processing of setting $QUPONB$ in step S28 or S29 is completed, the program proceeds to step S30, in which a setting of $MUP(ON) = 4$ is made. Then, in step S31, $QUPON$ is set to $QUPONB$, thereby starting the control of the ON pressure in the bottom up mode. When a discrimination of "Gratio" $> YG(N)H$ is made in step S20, MUP is set to "3,3" in step S32 and the program proceeds directly to step S27.

[0087] In the next upshifting control processing, since the setting of $MUP(ON) = 4$ has already been made in step S30 last time, a judgement of "NO" is made in step S24. The program thus proceeds to step S33 for discriminating whether $MUP(ON) = 4$ or not, and a judgement of "YES" is made therein. At this time, the program proceeds to step S34, in which a discrimination is made whether the time of lapse from the start of upshifting ($TMST - TM$) has reached a predetermined time $YTMUP4$. While $TMST - TM < YTMUP4$, the program proceeds to step S27 and following steps and the control in the bottom up mode is continued. When $TMST - TM \geq YTMUP4$, a discrimination is made in step S35 whether "Gratio" has exceeded a predetermined value $YGUPT$ or not. While "Gratio" $< YGUPT$, the program proceeds to step S27 and following steps to continue the control in the bottom up mode.

[0088] When "Gratio" $\geq YGUPT$, the program proceeds to step S36 to set MUP to "5,5" and then proceeds to step S37, in which the value of TM at that time is stored as $TMSTB$. Then, the program proceeds to step S38, in which $QUPON$ is set to a value which is obtained by adding $QUPONC$ to the final value of $QUPONB$. Since the value of $QUPONC$ has already been reset to zero in step S4, $QUPON$ becomes equal to $QUPONB$ ($QUPON = QUPONB$), and the control in the bottom up mode is continued.

[0089] In the next upshifting control processing, since MUP has already been set to "5,5" in step S36 last time, a judgement of "NO" is made in step S33, and the program proceeds to step S39 for discriminating whether $MUP(ON) = 5$ or not, and a judgement of "YES" is made therein. At this time, a discrimination is made in step S40 whether the time of lapse from the start of upshifting ($TMST - TM$) has reached a predetermined time $YTMUP5$. If $TMST - TM \geq$

YTMUP5, the program proceeds to step S41, in which a discrimination is made whether "Gratio" is above that lower limit value $YG(N+1)L$ for judging the clutch engagement which is set based on the gear ratio of the speed stage established after speed changing. If $TMST - TM < YTMUP5$ or "Gratio" $< YG(N+1)$, the program proceeds to step S36 and following steps, and the control in the bottom up mode is continued.

5 [0090] When "Gratio" $\geq YG(N+1)L$, MUP is set to "7,7" in step S42 and the program then proceeds to step S43, in which QUPONC is set to a value which is obtained by adding a predetermined value $\Delta QUPONC$ to the previous value of QUPONC. Then, in step S44, a discrimination is made whether "Gratio" lies within a range between those lower limit value $YG(N+1)L$ and upper limit value $YG(N+1)H$ for judging the clutch engagement which are set based on the gear ratio of the speed stage established after speed changing. If the result of this discrimination is "NO", the
10 program proceeds to step S37 and following steps. In this case, since QUPONC increases by $\Delta QUPONC$ in the operation (or computation) in step S43, QUPON to be obtained in step S38 also gradually increases, and the control of the ON pressure in an end mode is started.

[0091] In the next upshifting control processing, since MUP has already been set to "7,7" in step S42 last time, a judgement of "NO" is made in step S39, and the program proceeds to step S42 and following steps. In this case, if $YG(N+1)L \leq \text{"Gratio"} \leq YG(N+1)H$, i.e., if the clutch on the engaging side has completed engagement, the program
15 proceeds to step S45. In step S45, a discrimination is made whether the time of duration of engagement completion ($TMSTB - TM$) has reached a predetermined time YTMUP6. While $TMSTB - TM < YTMUP6$, the program proceeds to step S38 and the control in the end mode is continued. When $TMSTB - TM \geq YTMUP6$, the program proceeds to step S13, in which a processing of upshifting completion is performed.

20 [0092] Details of operational processing of QUPOFF in step S10 are shown in FIG. 9. First, in step S10-1, the value QUPOFFB of the OFF pressure in a bottom down mode is set to an appropriate value depending on the throttle opening. Then, in step S10-2, a discrimination is made whether the value of MUP on the OFF side (MUP(OFF)) is "0" or not. Since MUP(OFF) has already been set to zero ($MUP(OFF) = 0$) in the upshifting control processing in the first time, a judgement of "YES" is made in step S10-2. The program thus proceeds to step S10-3, in which a setting of MUP(OFF)
25 $= 1$ is made. Then, the program proceeds to step S10-4, in which a standard (reference) value QUPOFFA of the OFF pressure in an initial pressure mode is set to an appropriate value depending on the throttle opening and the speed ratio of the fluid torque converter 2. Further, in step S10-5, a processing of operating (computing) a value of the OFF pressure in the subtraction mode is performed. Details of this processing are shown in FIG. 10. First, in step S10-5-1, a discrimination is made whether $MUP(OFF) = 1$ or not. If $MUP(OFF) = 1$, both a subtraction value $\Delta QUPOFF$ and a feedback correction value QWP are reset to zero in step S10-5-2. If $MUP(OFF) \neq 1$, $\Delta QUPOFF$ is set to a predetermined value in step S10-5-3 and, also, QWP is computed by a functional operation from a deviation between "Gratio" at the present time and that target value of clutch slipping $YG(N)S$ which is set a little lower than the lower limit value $YG(N)L$ for judging the clutch engagement, the lower limit value being set based on the gear ratio of the speed stage established before speed changing. Then, in step S10-5-4, there is performed a processing to make QUPOFFA to a value
35 which is obtained by subtracting $\Delta QUPOFF - QWP$ from the value of QUPOFFA that is set in step S10-4. Finally, by the processing in steps S10-5-5 and S10-5-6, QUPOFFA is made so as not fall below QUPOFFB.

[0093] After the processing in step S10-5 has been completed as described above, in step S10-6, a processing is made of making QUPOFF to QUPOFFA. An operational processing of QUPOFF in the first time of upshifting control processing is thus completed. In the second time of upshifting control processing, since the setting of $MUP(OFF) = 1$
40 has already been made in step S10-3 last time, a judgement of "NO" is made in step S10-2. The program thus proceeds to step S10-7 for making a discrimination as to whether $MUP(OFF) = 1$ or not, and a judgement of "YES" is made therein. At this time, the program proceeds to step S10-8, in which a discrimination is made whether the time of lapse from the start of upshifting ($TMST - TM$) has reached a predetermined time YTMUP7. If $TMST - TM < YTMUP7$, the program proceeds to step S10-3 and following steps. In this case, QUPOFF becomes equal to the value of QUPOFFA which is obtained in step S10-4, and the control in the initial pressure mode is performed.

[0094] When $TMST - TM \geq YTMUP7$, a setting of $MUP(OFF) = 2$ is made in step S10-9 and then the program proceeds to step S10-4. In this case, QUPOFF becomes a value which is obtained in step S10-4 by subtracting $\Delta QUPOFF - QWP$ from QUPOFFA, and a control in the subtraction mode is started. In the next processing of upshifting control, since the setting of $MUP(OFF) = 2$ has already been made in step S10-9 last time, a judgement of "NO" is made in
50 step S10-7. The program thus proceeds to step S10-10 for making a discrimination as to whether $MUP(OFF) = 2$ or not. A judgement of "YES" is made therein and the program proceeds to step S10-9 and following steps, and the control in the subtraction mode is continued. In the subtraction mode, QUPOFF sequentially decreases, and the hydraulic clutch on the disengaging side begins to slide, with the result that "Gratio" falls below $YG(N)L$. When "Gratio" $< YG(N)S$, a condition of $QWP > 0$ is attained and the subtraction range of QUPOFFA becomes smaller. A feedback control is thus made so as to attain a condition of "Gratio" $= YG(N)S$.

55 [0095] When MUP is set to "3,3" in the above-described step S23 or S32, a discrimination of "NO" is made in step S10-10. The program thus proceeds to step S10-11 for making a discrimination as to whether $MUP(OFF) = 3$ or not, and a judgement of "YES" is made therein. At this time, after setting YTMUP8 in step S10-12, the program proceeds

to step S10-13, in which a discrimination is made whether the time of lapse from the time of completion of preparation for engagement of the hydraulic clutch on the engaging side (TMSTA - TM) has reached YTMUP8. The value YTMUP8 is set to a table value with the vehicle speed V as a parameter so that it becomes shorter with the increase in the vehicle speed. While $TMSTA - TM < YTMUP8$, the program proceeds to step S10-4 and following steps and the control in the subtraction mode is continued. When $TMUPD1 - TM \geq YTMUP8$, a setting of $MUP(OFF) = 4$ is made in step S10-14, and the program then proceeds to step S10-15. In step S10-15, QUPOFF is set to QUPOFFB, and the control in the bottom down mode is started. In the next processing of upshifting control, since the setting of $MUP(OFF) = 4$ has already been made last time in step S10-14, a judgement of "NO" is made in step S10-11. The program thus proceeds to step S10-16 for making a discrimination as to whether $MUP(OFF) = 4$ or not. A judgement of "YES" is made therein and the program proceeds to step S10-14 and following steps, and a control in the bottom down mode is continued.

[0096] When MUP is set to "5,5" in the above-described step S36, a judgement of "NO" is made in step S10-16. The program thus proceeds to step S10-17 for making a discrimination as to whether $MUP(OFF) = 5$ or not, and a judgement of "YES" is made therein. At this time, the program proceeds to step S10-18, and QUPOFF is set to a value QUPOFFC which gradually decreases from QUPOFFB depending on "Gratio". A control in a tail mode is thus performed. Then, when MUP has been set to "7,7" in the above-described step S42, a judgement of "NO" is made in step S10-17. The program thus proceeds to step S10-19, and a control is performed in the end mode in which QUPOFF is made to zero.

[0097] In the above-described upshifting control, by the control of the OFF pressure in the subtraction mode, the OFF pressure is feedback-controlled so that "Gratio" becomes YG(N)S. A slight slipping thus occurs in the hydraulic clutch on the disengaging side. Since the control of the ON pressure in the addition mode is performed in this condition, "Gratio" sensitively varies with the engaging force of the hydraulic clutch on the engaging side. Therefore, the point of time of completion of preparation for engagement of the hydraulic clutch on the engaging side can be detected by the increase in "Gratio" to YGCONOK. Conventionally, the following arrangement is also known. Namely, in order to prevent the engine from racing, the ON pressure is gradually increased while controlling the OFF pressure such that the hydraulic clutch on the disengaging side does not slip, i.e., such that the "Gratio" lies within a range between YG(N)L and YG(N)H. When "Gratio" has exceeded YG(N)H as a result of decrease in the rotational speed of the input shaft due to simultaneous engagement of the hydraulic clutch on the disengaging side and the hydraulic clutch on the engaging side, a judgement is made that the speed change condition has transferred to an inertia phase. The OFF pressure is then rapidly decreased and, further, the ON pressure is rapidly increased. However, if the rate of gradual increase in the ON pressure is made large, the engaging force of the hydraulic clutch on the engaging side at the time of transferring to the inertia phase becomes excessive, resulting in the occurrence of shocks. Therefore, the rate of gradual increase in the ON pressure cannot be made so large and, consequently, it takes much time for the speed change condition to transfer to the inertia phase. This results in a longer time required in the speed changing. On the other hand, in the present embodiment, the completion of preparation for engagement of the hydraulic clutch on the engaging side is detected as described above, and the OFF pressure is rapidly decreased by switching to the bottom down mode at a lapse of YTMUP8 from the point of time of completion of preparation for engagement. Therefore, the speed change condition can be transferred at an early time to the inertia phase (a condition of "Gratio" > YG(N)H) while preventing the engine from racing, thereby enabling to reduce the time required for speed changing. Further, in the present embodiment, since the rate of gradual increase in the ON pressure in the addition mode is increased from the point of time of completion of preparation for engagement, the transferring to the inertia phase can still further be accelerated.

[0098] When the vehicle speed becomes high, a delay occurs in the decrease or drop in the hydraulic pressure in the hydraulic clutch on the disengaging side under the influence of centrifugal force. In the present embodiment, however, since YTMUP8 is set so as to become shorter with the increase in the vehicle speed, the timing of switching of the OFF pressure to the bottom down mode is accelerated at a high vehicle speed. Therefore, the occurrence of shocks is prevented as a result of increase in simultaneous engagement due to a delay in the pressure decrease in the hydraulic clutch on the disengaging side at a high vehicle speed. Further, in the present embodiment, in order to accelerate the speed changing after having transferred to the inertia phase, the ON pressure is rapidly increased by the switching to the bottom up mode at a lapse of YTMUP3 from the point of time of completion of preparation for engagement of the hydraulic clutch on the engaging side. However, since YTMUP3 is set so as to become longer with the increase in the vehicle speed, the occurrence of shocks due to an increase in simultaneous engagement at a high vehicle speed can surely be prevented.

[0099] If the control of the OFF pressure in the subtraction mode has failed, a condition of "Gratio" > YG(N)H sometimes occurs by the simultaneous engagement due to an increase in the ON pressure while giving rise to slipping in the hydraulic clutch on the disengaging side. In such a case, by judging that the speed change condition has transferred to the inertia phase, the control mode of the OFF pressure and the control mode of the ON pressure are immediately switched to the bottom down mode and the bottom up mode, respectively.

[0100] At the time of manual speed changing in which a condition of FTIP = 1 is satisfied, it is desired to shorten the

speed change time below that at the time of automatic speed changing. For that purpose, in the present embodiment, the ON pressure is corrected by boosting at the time of manual speed changing, thereby shortening the speed change time. Further, in the present embodiment, the boosting correction value QUPONX in the response pressure mode and the addition mode before the transferring to the inertia phase is set to a relatively large value, thereby shortening the time to the transferring to the inertia phase. Further, the boosting correction value QUPONY in the bottom up mode after transferring to the inertia phase is set to a relatively small value, thereby preventing the shocks from becoming large.

[0101] The downshifting control is performed in the procedures shown in FIG. 12. Details thereof are explained with reference to FIG. 11 which schematically shows the changes in the ON pressure, the OFF pressure, and the "Gratio", respectively, at the time of downshifting.

[0102] The downshifting control is started when the speed stage designation signal SH is switched to a signal which designates a lower speed stage $G(N-1)$ than the speed stage $G(N)$ that is now being established. In the downshifting control, MAT is first set to "A,B" in step S101. When MAT has thus been set, the changeover valve 13 is switched to a position which is different from the present position. Then, a discrimination is made in step S102 whether the value of MDN on the ON side (MDN(ON)) is "0" or not. Since MDN is initially set to "0,0", a judgement of "YES" is made in step S102. The program thus proceeds to step S103, in which TM is set to TMST. Further, in step S104, initial setting is made of various values to be used in the operation (or computation) of the ON pressure and the OFF pressure. Then, after passing through a step of S104' which is described hereinafter, the program proceeds to step S105, in which a setting of MDN(ON) = 1 is made. Further, in step S106, a value QDNONA of the ON pressure in the response pressure mode is set to an appropriate value depending on the vehicle speed and the throttle opening. The value QDNONA decreases with the lapse of time. Then, in step S107, a command value QDNON of the ON pressure is set to QDNONA, and an operational processing of the command value QDNOFF of the OFF pressure to be described hereinafter is performed in step S108. Thereafter, the program proceeds to step S109, in which the selection processing of proportional valves is performed in the following manner. Namely, between the solenoid proportional valves 17₁, 17₂, a command value of the output pressure of the solenoid proportional valve which controls the hydraulic pressure of a hydraulic clutch on the engaging side in the speed change at this time is made to be QDNON, and a command value of the output pressure of the solenoid proportional valve which controls the hydraulic pressure of a hydraulic clutch on the disengaging side is made to be QDNOFF. The downshifting control processing of the first time is thus completed.

[0103] In the next downshifting control processing, since the setting of MDN(ON) = 1 has already been made in step S105 last time, a judgement of "NO" is made in step S102. At this time, the program proceeds to step S110, in which a discrimination is made whether the time of lapse from the start of downshifting (TMST - TM) has reached a predetermined time YTMDN1. The value YTMDN1 is set to a value which is slightly longer than an ordinary time required for downshifting. When $TMST - TM \geq YTMDN1$, a judgement is made that the downshifting control has failed, and the program thus proceeds to step S111. In this step, there is performed a downshifting completion processing in which MAT is set to "0,B" (at the time of downshifting from the third speed to the second speed) or to "A,0" (at the time of downshifting other than from the third speed to the second speed). Further, MDN is reset to "0,0", and TM is reset to zero. When MAT is set to "0,B" or "A,0" in this processing, the positions of the first and the second shift valves 12₁, 12₂ are switched to the condition of performing the downshifting. The hydraulic pressure in the hydraulic clutch on the engaging side becomes the line pressure, and the hydraulic pressure in the hydraulic clutch on the disengaging side becomes atmospheric.

[0104] If $TMST - TM < YTMDN1$, the program proceeds to step S112 and a discrimination is made whether MDN(ON) = 1 or not. In the second downshifting control processing, since MDN(ON) = 1, a judgement of "YES" is made in step S112. The program thus proceeds to step S113, in which a discrimination is made whether "Gratio" has exceeded a predetermined value YGDNS or not. If "Gratio" > YGDNS, the program proceeds to step S114, in which a discrimination is made whether the time of lapse from the start of downshifting (TMST - TM) has reached a predetermined time YTMDN2. If $TMST - TM < YTMDN2$, the program proceeds to step S105 and following steps to thereby perform the control of the ON pressure in the response pressure mode.

[0105] When "Gratio" ≤ YGDNS or $TMST - TM \geq YTMDN2$, the program proceeds to step S115, in which a setting of MDN(ON) = 2 is made, and then proceeds to step S116, in which the value QDNONB of the ON pressure in a low pressure correction mode is set to an appropriate value depending on the vehicle speed and the throttle opening. In step S117, there is performed an annealing processing in which QDNONB is gradually changed from QDNONA to a value to be set as above. Then, in step S118, QDNON is set to QDNONB to thereby start the control of the ON pressure in the low pressure correction mode.

[0106] In the next downshifting control processing, since the setting of MDN(ON) = 2 has already been made in step S115 last time, a judgement of "NO" is made in step S112. The program thus proceeds to step S119 for making a discrimination as to whether MDN(ON) = 2 or not, and a judgement of "YES" is made therein. At this time, the program proceeds to step S120 and a discrimination is made whether "Gratio" has exceeded YGDNS or not. If "Gratio" > YGDNS,

the program proceeds to step S121, and a discrimination is made whether the time of lapse from the start of downshifting (TMST - TM) has reached a predetermined value YTMDN3. If $TMST - TM < YTMDN3$, the program proceeds to step S115 and following steps to continue the control in the low pressure correction mode.

[0107] Once "Gratio" \leq YGDNS, MDN is set to "3,3" in step S122 and the program then proceeds to step S123. If the condition of $TMST - TM \geq YTMDN3$ is satisfied while "Gratio" $>$ YGDNS, the program proceeds directly to step S123, in which a setting of $MDN(ON) = 3$ is made. Then, in step S124, a standard (reference) value QDNONC of the ON pressure in a synchronous mode is set to an appropriate value depending on the vehicle speed and the throttle opening. In step S125, an annealing processing to gradually change QDNONC from QDNONB to the above-described value is performed. Then, the program proceeds to step S126, in which a check is made of a value of a flag FTBD which is set to "1" when the speed stage designating signal SH is switched, during the downshifting control, to a signal specifying a speed stage G(N-2) of further lower speed. Then, if $FTBD = 0$, the program proceeds to step S127, in which QDNON is set to a value which is obtained by adding QDNOND to QDNONC. The value QDNOND is set to zero in the initial setting and, therefore, the condition becomes $QDNON = QDNONC$. The control of the ON pressure in the synchronous mode is thus started.

[0108] In the next downshifting control processing, since the setting of $MDN(ON) = 3$ has already been made in step S123 last time, a judgement of "NO" is made in step S119. The program thus proceeds to step S128 for making a discrimination as to whether $MDN(ON) = 3$ or not, and a judgement of "YES" is made therein. At this time, the program proceeds to step S129, in which a discrimination is made whether the time of lapse from the start of downshifting (TMST - TM) has reached a predetermined time YTMDN4. If $TMST - TM < YTMDN4$, the program proceeds to step S123 and following steps and the control in the synchronous mode is continued.

[0109] Once $TMST - TM \geq YTMDN4$, the program proceeds to step S130, in which a discrimination is made whether "Gratio" has fallen below that upper limit value $YG(N-1)H$ for judging the engagement of hydraulic clutch which is set based on the gear ratio of the speed stage to be established after speed changing. When "Gratio" $\leq YG(N-1)H$, the program proceeds to step S131, in which, by using a timer value TMSTC which is set to a value of TM at the time when a condition of "Gratio" $\leq YG(N-1)H$ has been satisfied, a discrimination is made whether the time of lapse from the point of time when the condition of "Gratio" $\leq YG(N-1)H$ has been satisfied (TMSTC - TM) has reached a predetermined time YTMDN5. Then, when "Gratio" $> YG(N-1)H$ or $TMSTC - TM < YTMDN5$, the program proceeds to step S123 and following steps, and the control in the synchronous mode is continued. Once $TMSTD - TM \geq YTMDN5$, the program proceeds to step S132 and a discrimination is made whether $FTBD = 1$ or not. If $FTBD = 0$, a setting of $MDN(ON) = 4$ is made in step S133 and then QDNONC is set to an appropriate value in step S134 depending on the vehicle speed and the throttle opening. Further, in step S135, QDNOND is set to a value which is obtained by adding $\Delta QDNOND$ to the previous value of QDNOND. Then, in step S136, a discrimination is made whether "Gratio" lies within a range of the upper limit value $YG(N-1)H$ and the lower limit value $YG(N-1)L$ for judging the engagement of hydraulic clutch, which values are set based on the gear ratio of the speed stage to be established after speed changing. If the result of this discrimination is "NO", TMSTD is set in step S137 to the value of TM at that time, and the program then proceeds to step S127. In this case, since QDNOND increases by $\Delta QDNOND$ by the operation (or computation) in step S135, QDNON to be obtained in step S127 also gradually increases, and the control of the ON pressure in the end mode is started.

[0110] In the next downshifting control processing, since the setting of $MDN(ON) = 4$ has already been made in step S133 last time, a judgement of "NO" is made in step S128. The program thus proceeds to step S132 and following steps and the control in the end mode is continued. Then, when a judgement of "YES" is made in step S136, the program proceeds to step S138. In this step, a discrimination is made whether the time in which "Gratio" continuously lies within the range of $YG(N-1)H$ and $YG(N-1)L$, i.e., the time of duration of the condition of engagement completion of the hydraulic clutch on the engaging side (TMSTD - TM) has reached a predetermined time YTMDN6. Once $TMSTD - TM \geq YTMDN6$, the program proceeds to step S111 and a downshifting completion processing is performed.

[0111] If a judgement of $FTB = 1$ is made in step S126 or S132, the program proceeds directly to step S111 and the downshifting completion processing is performed. The processing of setting FTBD is shown in FIG. 27. During downshifting control processing to downshift to a speed stage of one lower speed stage G(N-1), if a downshifting command is issued to downshift to a still lower speed stage G(N-2) (S1201, S1202), a setting of $FTBD = 1$ is made (S1203). In the cases other than the above, a resetting of $FTBD = 0$ is made (S1204).

[0112] According to the above-described control, when "Gratio" \leq YGDNS, the ON pressure rises by the transfer to the synchronous mode. There is, however, a response delay until the actual hydraulic pressure of the hydraulic clutch on the engaging side (hereinafter referred to as ON clutch pressure) rises. This response delay is short at a high vehicle speed and long at a low vehicle speed due to the influence of a centrifugal force. Therefore, as shown in FIG. 13A, the following arrangement is made. Namely, considering the difference between the response delay "a" at a low vehicle speed and a response delay b at a high vehicle speed, YGDNS is set relatively high at a low vehicle speed and is set relatively low at a high speed, so that at the time when "Gratio" has entered the synchronous region between $YG(N-1)H$ and $YG(N-1)L$, the ON clutch pressure is boosted, regardless of the vehicle speed, to a predetermined pressure

at which no slipping in the hydraulic clutch occurs.

[0113] In addition, when the engine temperature is low, the output torque of the engine increases by a fast idle operation and, therefore, the speed of decrease in "Gratio" at the time of downshifting becomes larger than at the time of high engine temperature, as shown in FIG. 13B. Therefore, the following arrangement is made. Namely, by detecting the engine temperature, i.e., the engine cooling water temperature TW, YGDNS is set higher at a low cooling water temperature than at a high cooling water temperature, so that even at the time of low cooling water temperature, the ON clutch pressure is boosted, at the time when "Gratio" has entered the synchronous region, to a predetermined pressure at which no slipping in the hydraulic clutch occurs. The boosting response delay "a" of the ON clutch pressure is constant irrespective of the engine temperature. In this embodiment, however, in order to enable to deal with the difference in the boosting response delay in the ON clutch pressure due to the vehicle speed, YGDNS is computed in step S104' from the map, for example, with the vehicle speed and the cooling water temperature as parameters.

[0114] Details of operational processing of QDNOFF in step S108 are shown in FIG. 14. First, in step S108-1, a discrimination is made whether MDN(OFF) = 0 or not. Since MDN has been set to "0,0" in the first downshifting control processing, a judgement of "YES" is made in step S108-1. The program thus proceeds to step S108-2, in which an initial value QDNOFFA of the OFF pressure in the initial pressure mode is set to an appropriate value depending on the vehicle speed and the throttle opening. Then, in step S108-3, a setting of MDN(OFF) = 1 is made and, in step S108-4, a speed ratio "etr" of the torque converter 2 (rotational speed of input shaft 3 / rotational speed of engine) at that time is stored in memory as "etrm". Then, the program proceeds to step S108-5, in which there is computed a boosting correction value QDNOFFZ. This boosting correction value QDNOFFZ varies with a degree of development (or progress) of speed change of the engine rotational speed at the time of start of downshifting, which degree of development being dependent on an increase in the rotational speed of the engine due to slipping in the fluid torque converter 2. The value QDNOFFZ is computed by multiplying a reference (standard) value QDNOFFZO depending on the throttle opening by a speed change developing degree function K which is obtained by a functional operation with "etrm" as a parameter. The function K will be described in detail hereinafter. When QDNOFFZ has been computed, the program proceeds to step S108-6, in which QDNOFFB which is a value of the OFF pressure in a low pressure holding mode is set to a value which is obtained by adding QDNOFFZ to a reference value QDNOFFBO depending on the throttle opening. Then, in step S108-7, an annealing processing is performed for gradually decreasing QDNOFF from QDNOFFA down to a value to be set as described above. Thereafter, in step S108-8, QDNOFF is set to QDNOFFB. In this manner, there is started a control in the initial pressure mode in which the OFF pressure is gradually decreased from QDNOFFA.

[0115] In the next downshifting control processing, since the setting of MDN(OFF) = 1 has already been made in step S108-3 last time, a judgement of "NO" is made in step S108-1. The program thus proceeds to step S108-9 for discriminating as to whether MDN(OFF) = 1 or not and a judgement of "YES" is made therein. At this time, the program proceeds to step S108-10, in which a discrimination is made whether "Gratio" has fallen below that lower limit value YG(N)L for judging the engagement of clutch which is set based on the gear ratio of the speed stage established before speed changing. If "Gratio" > YG(N)L, a discrimination is made in step S108-11 whether the time of lapse from the start of downshifting (TMST - TM) has reached a predetermined time YTMDN7. While TMST - TM < YTMDN7, the program proceeds to step S108-3 and following steps, and the control in the initial pressure mode is continued. When "Gratio" ≤ YG(N)L or TMST - TM ≥ YTMDN7, a setting of MDN(OFF) = 2 is made in step S108-12 and the program proceeds to step S108-5 and following steps. A control of the OFF pressure in the low pressure holding mode is started.

[0116] In the next downshifting control processing, since the setting of MDN(OFF) = 2 has already been made last time in step S108-12 last time, a judgement of "NO" is made in step S108-9. The program thus proceeds to step S108-13 for making a judgement as to whether MDN(OFF) = 2 or not, and a judgement of "YES" is made therein. At this time, the program proceeds to step S108-14, in which a discrimination is made whether "Gratio" has fallen below a predetermined value YGDNT. If "Gratio" > YGDNT, a discrimination is made in step S108-15 whether a time of lapse from the start of downshifting (TMST - TM) has reached a predetermined time YTMDN8. While TMST - TM < YTMDN8, the program proceeds to step S108-12 and following steps and the control in the low pressure holding mode is continued. Then, when "Gratio" ≤ YGDNT or TMST - TM ≥ YTMDN8, a setting of MDN(OFF) = 3 is made in step S108-16. The program then proceeds to step S108-17, in which a value QDNOFFC of the OFF pressure in the tail mode is set to an appropriate value depending on the throttle opening. Then, in step S108-18, QDNOFF is set to QDNOFFC, and the control is started in the tail mode in which the OFF pressure is held in a lower pressure than in the low pressure holding mode.

[0117] In the next downshifting control processing, since the setting of MDN(OFF) = 3 has already been made in step S108-16 last time, a judgement of "NO" is made in step S108-9. The program thus proceeds to step S108-19 for making a discrimination as to whether MDN(OFF) = 3 or not, and a judgement of "YES" is made therein. At this time, the program proceeds to step S108-20, in which a discrimination is made whether the time of lapse from the start of downshifting (TMST - TM) has reached a predetermined time YTMDN4. If TMST - TM ≥ YTMDN4, the program proceeds to step S108-21, in which a discrimination is made whether "Gratio" has fallen below YG(N - 1)H or not. If

TMST - TM < YTMDN4 or "Gratio" > G(N - 1)H, the program proceeds to step S108-16 and following steps, and the control in the tail mode is continued. Then, when TMST - TM ≥ YTMDN4 and also when "Gratio" ≤ YG(N - 1)H, the program proceeds to step S108-22, in which the value of TM at that time is set to TMSTC which is used in a time counting processing in the above-described step S131. Then, in step S108-23, a setting of MDN(OFF) = 4 is made and also, in step S108-24, the value QDNOFFD of the OFF pressure in the end mode is set to a value which gradually decreases from QDNOFFC. In step S108-25, QDNOFF is set to QDNOFFD, and the control of the OFF pressure in the end mode is performed.

[0118] The above-described speed change developing degree function K is obtained as follows. Let a scheduled (or estimated) speed ratio of the fluid torque converter 2 at the time of downshifting completion be a standard (or reference) speed ratio Yetr. Let the rotational speed of the engine to be obtained by Yetr and the rotational speed Nin of the input shaft 3 of the transmission at the time of starting the downshifting be a standard (or reference) rotational speed of the engine NeG(N). And let the rotational speed of the engine at the time of downshifting completion which is obtained by NeG(N) and the speed change ratio YG(N) before starting the downshifting and the speed change ratio YG(N-1) after the completion of the downshifting be a target rotational speed of the engine NeG(N-1). Then, the speed change developing degree function K can be obtained by the following formula as a ratio of the difference between NeG(N) and the actual rotational speed Ne of the engine at the time of starting the downshifting to the difference between NeG(N-1) and NeG(N).

$$K = (Ne - NeG(N)) / (NeG(N-1) - NeG(N)) \quad (1)$$

[0119] In other words, the speed change developing degree function K denotes a ratio of an increase amount in the rotational speed of the engine due to slipping of the fluid torque converter 2 at the time of starting of downshifting, to the change amount in the rotational speed of the engine when downshifting is carried out while the speed ratio "etr" of the fluid torque converter 2 is held at Yetr.

[0120] Here, NeG(N) and NeG(N-1) are respectively expressed as follows.

$$NeG(N) = Nin / Yetr \quad (2)$$

$$\begin{aligned} NeG(N-1) &= NeG(N) \cdot YG(N-1) / YG(N) \\ &= (Nin \cdot YG(N-1)) / (YG(N) \cdot Yetr) \end{aligned} \quad (3)$$

Ne can be expressed as

$$Ne = Nin / etrm \quad (4)$$

where etrm is an actual etr at the time of starting of downshifting. If rearrangement is made by substituting formulas (2), (3), and (4) into formula (1), the following is obtained.

$$K = \{(Yetr / etrm - 1)\} / \{(YG(N-1) / YG(N) - 1)\} \quad (5)$$

[0121] When the accelerator pedal is stepped slowly, if the vehicle speed does not change, only the rotational speed of the engine increases due to slipping in the fluid torque converter 2, with the result that rotational speed of the engine sometimes exceeds NeG(N) at the time of starting of downshifting. In such a case, when slipping occurs to the hydraulic clutch on the disengaging side after the starting of downshifting, the rotational speed of the input shaft 3 rapidly increases so as to approach the rotational speed of the engine that has already been increased, and the speed of decrease in "Gratio" becomes large. As a result, while the ON clutch pressure has not risen sufficiently, "Gratio" enters into the synchronous region, and the hydraulic clutch on the engaging side therefore can no longer be engaged at the time of synchronization. Therefore, in the present embodiment, the following arrangement is employed. Namely, the boosting correction value QDNOFFZ is operated (or computed) by using the speed change developing degree as a function K to be obtained by formula (5) with "etrm" as a parameter, and the value QDNOFFB is added by the amount of QDNOFFZ. The decrease in "Gratio" is thereby restrained by the engaging force of the hydraulic clutch on the disengaging side so that the hydraulic clutch on the engaging side can be sufficiently engaged at the time of synchro-

nization. Since "etr" at the time of completion of speed change varies delicately with the operating conditions of the engine, it is preferable to replace the value of Yetr to be substituted into formula (5) depending on the operating conditions of the engine.

[0122] Further, in the present embodiment, if the speed stage designation signal SH is switched (or changed), during downshifting control from G(N) to G(N - 1), to a signal to designate a speed stage which is a still lower speed stage G(N - 2) to thereby make a setting of FTBD = 1, a downshifting completion processing is performed when the control of the ON pressure in the low pressure correction mode has been completed (when the control in a synchronous mode has been completed when a setting of FTBD = 1 is made during the control of the ON pressure in the synchronous mode), whereby the downshifting control from G(N - 1) to G(N - 2) is started. Since the downshifting control from G(N) to G(N - 1) is completed in this manner at an early time, the time required for the downshifting from G(N) to G(N - 2) is shortened, resulting in an improved drivability.

[0123] There is a case where, during downshifting control from G(N) to G(N - 1), the speed change designation signal SH is switched or changed to a signal designating G(N) or a case where, during upshifting control from G(N) to G(N + 1), the speed change designation signal SH is switched to a signal designating G(N). In such a case, the hydraulic pressure of the hydraulic clutch relating to the speed changing can be controlled with the first and the second solenoid proportional valves 17₁, 17₂ even without switching the position of the first and the second shift valves 12₁, 12₂ or the changeover valve 13.

[0124] For this purpose, the following arrangement is made. Namely, when the speed change designation signal SH is switched to a signal designating G(N) during downshifting control from G(N) to G(N - 1), the downshifting control is stopped on the way (or in the course of the control), and a switchover upshifting to switch (or transfer) to an upshifting control from G(N - 1) to G(N) is performed. When the speed change designation signal SH is switched to a signal designating G(N) during upshifting control from G(N) to G(N + 1), the upshifting control is stopped on the way, and a switchover downshifting to switch to a downshifting control from G(N + 1) to G(N) is performed.

[0125] Details of switchover upshifting control are shown in FIG. 16. An explanation will now be made with reference to FIG. 15 which schematically shows the changes of the ON pressure, the OFF pressure, and the "Gratio", respectively. First, in step S201, MUP is set to "4,4" and MDN is reset to "0,0". Then, in step S202, TM is set to TMST. Thereafter, in step S203, a discrimination is made whether the time of lapse from the start of upshifting (TMST - TM) has reached a predetermined time YTMUP1. Once TMST - TM \geq YTMUP1, the program proceeds to step S204, in which the upshifting completion processing is performed. The contents of this processing are the same as those in step S13 shown in FIG. 7.

[0126] If TMST - TM < YTMUP1, the value QUPONB of the ON pressure in the bottom up mode in upshifting is computed in step S205. Then, in step S206, a discrimination is made whether MUP(ON) = 4 or not. In the first processing, a judgement of "YES" is made in step S206, and the program proceeds to step S207, in which a discrimination is made whether "Gratio" has exceeded YGUPT or not. If "Gratio" < YGUPT, there is performed in step S208 an annealing processing in which QUPONB is gradually changed from the final value of QDNOFF in the preceding downshifting control to the value of QUPONB that was obtained in step S205. In step S209, QUPON is set to QUPONB and, in step S210, an operational processing of QUPOFF is performed. Then, in step S211, the proportional valve selection processing is performed. The operational processing of QUPOFF is performed in the same manner as in the processing in steps S10-16 through S10-19 in FIG. 9. The proportional valve selection processing is the same as the processing in step S11 in FIG. 7.

[0127] Once "Gratio" \geq YGUPT, MUP is set to "5,5" in step S212 and, in step S213, TMSTB is set to the value of TM at that time. Then, in step S214, QUPON is set to a value which is obtained by adding QUPONC to QUPONB. Since an initial value of QUPONC is zero, a condition of QUPON = QUPONB occurs, and the control of the ON pressure in the bottom up mode is performed.

[0128] In the next processing, since MUP has already been set to "5,5" in step S212 last time, a judgement of "NO" is made in step S206. The program proceeds to step S215 for making a discrimination as to whether MUP(ON) = 5 or not, and a judgement of "YES" is made therein. At this time, a discrimination is made in step S216 whether "Gratio" has exceeded YG(N)L or not. While "Gratio" < YG(N)L, the program proceeds to step S212 and following steps, and a control of the ON pressure in the bottom up mode is continued. Once "Gratio" \geq YG(N)L, MUP is set to "7,7" in step S217, and the program proceeds to step S218 and following steps. Therefore, in the next processing, a judgement of "NO" is made in step S215, and the program proceeds directly to step S217. In step S218, a processing is made to set QUPONC to a value which is obtained by adding Δ QUPONC to the previous value of QUPONC. Then, in step S219, a discrimination is made whether "Gratio" has fallen within a range between YG(N)L and YG(N)H. If the result of this discrimination is "NO", the program proceeds to step S213 and following steps. In this case, since QUPONC increases by Δ QUPONC by the operation (or computation) in step S218, QUPON to be obtained in step S214 also gradually increases, and a control of the ON pressure in the end mode is performed. If $YG(N)L \leq "Gratio" \leq YG(N)H$, i.e., if the hydraulic clutch on the engaging side is in a condition of completion of engagement, a discrimination is made in step S220 whether the time of duration of the condition of completion of engagement (TMSTB - TM) has reached a

predetermined time YTMUP6 or not. When $TMSTB - TM \geq YTMUP6$, the program proceeds to step S204, in which the upshifting completion control is performed.

[0129] Details of the switchover downshifting are shown in FIG. 18. An explanation will now be made with reference to FIG. 17 which schematically shows the changes in the ON pressure, the OFF pressure, and the "Gratio", respectively. First, in step S301, MUP is reset to "0,0" and MDN is set to "2,2". Then, in step S302, TM is set to TMST and, in step S303, a discrimination is made whether the time of lapse from the starting of downshifting ($TMST - TM$) has reached a predetermined time YTMDN1. Once $TMST - TM \geq YTMDN1$, the program proceeds to step S304, in which the downshifting completion processing is performed. The contents of this processing are the same as those of step S111 shown in FIG. 12.

[0130] If $TMST - TM < YTMDN1$, a discrimination is made in step S305 whether $MDN(ON) = 2$ or not. In the first processing, a judgement of "YES" is made in step S305, and the program proceeds to step S306, in which a discrimination is made whether "Gratio" has exceeded YGDNS or not. If "Gratio" > YGDNS, QDNONB is computed in step S307. In step S308, there is performed an annealing processing in which QDNONB is gradually changed from the final value of QUPOFF in the previous upshifting control to the value of QDNONB that was obtained in step S307. In step S309, QDNON is set to QDNONB and then, in step S310, an operational processing of QDNOFF is performed. Then, in step S311, the proportional valve selection processing is performed. The control of the ON pressure in the low pressure correction mode is thereby performed. The operational processing of QDNOFF is performed in a similar manner to that of step S108-13 and following steps in FIG. 14 in a mode in which the steps of S108-15 and S108-20 are omitted therefrom. The proportional valve selection processing is the same as the processing in step S109 shown in FIG. 12.

[0131] Once "Gratio" \leq YGDNS, MDN is set to "3,3" in step S312 and in step S313, QDNOC is computed. Then, in step S314, there is performed an annealing processing in which QDNONC is gradually changed from the final value of QDNONB to the value that was obtained in step S312. Then, in step S315, QDNON is set to a value which is obtained by adding QDNOND to QDNONC. Since an initial value of QDOND is zero, a condition of $QDNONC = QDNON$ occurs, and the control of the ON pressure in the synchronous mode is started.

[0132] In the next processing, since MDN has already been set to "3,3" in step S312 last time, a judgement of "NO" is made in step S305. The program thus proceeds to step S316 for discriminating whether $MDN(ON) = 3$ or not, and a judgement of "YES" is made therein. At this time, a discrimination is made in step S317 whether "Gratio" has fallen below $YG(N)H$ or not. If "Gratio" $\leq YG(N)H$, the program proceeds to step S318, in which a discrimination is made whether the time of lapse from the time when the condition of "Gratio" $\leq YG(N)H$ has been satisfied ($TMSTC - TM$) has reached a predetermined time YTMDN5. If "Gratio" > $YG(N)H$ or $TMSTC - TM < YTMDN5$, the program proceeds to step S313 and following steps, and the control in the synchronous mode is continued.

[0133] Once $TMSTC - TM \geq YTMDN5$, a setting of $MDN(ON) = 4$ is made in step S319. Then, in step S320, QDMONC is computed and in step S321, QDNOND is set to a value which is obtained by adding $\Delta QDNOND$ to the previous value of QDNOND. Then, in step S322, a discrimination is made whether "Gratio" lies within a range between $YG(N)L$ and $YG(N)H$. If the result of this discrimination is "NO", TMSTD is set in step S323 to a value of TM at that time, and the program then proceeds to step S315. In this case, since QDNOND increases by $\Delta QDNOND$ by the operation in step S321, the value QDNON to be obtained in step S315 also gradually increases, and the control of the ON pressure in the end mode is performed. If a judgement of "YES" is made in step S322, a discrimination is made in step S324 whether the time of duration of the condition of engagement of the hydraulic clutch on the engaging side ($TMSTD - TM$) has reached a predetermined time YTMDN6. When $TMSTD - TM \geq YTMDN6$, the program proceeds to step S304, in which the downshifting completion processing is performed.

[0134] As described above, in the switchover upshifting control or switchover downshifting control, it is only when a discrimination is made as to whether or not the speed change time has reached YTMUP1, YTMDN1 which serve as a basis for discriminating an abnormality that a discrimination is made based on the time of lapse from the start of speed changing ($TMST - TM$). This is because the switchover speed changing is started in the midst of the previous speed changing and, therefore, the condition of speed change development can no longer be judged from the time of lapse from the start of speed changing. Consequently, the condition of the speed change development must be judged only from "Gratio". And, once "Gratio" can no longer be accurately detected due to troubles in sensors, or the like, it becomes impossible to adequately control the ON pressure or the OFF pressure depending on the condition of speed change development. As a solution, by using a flag FGFAIL which is set to "1" when "Gratio" can no longer be detected accurately, the switchover speed changing is prohibited when $FGFAIL = 1$. Further, in the forward running ranges such as "D₄", "D₃", etc., the speed changing is performed according to a speed change map which is set with the vehicle speed and the throttle opening as parameters. Here, the vehicle speed sensor 22 detects the vehicle speed based not on the absolute speed but on the rotational speed of the wheels. Therefore, when tire locking has occurred due to braking on a low- μ road or the like, the vehicle speed V to be detected by the vehicle speed sensor 22 lowers down to nearly zero while the actual vehicle speed makes little or no change. Downshifting is thus performed according to the speed change map, and upshifting is performed depending on the vehicle speed after the gripping of the tires has

recovered. This results in an unnecessary speed changing. In addition, in the condition of manual speed changing in which speed changing of one speed stage at a time is performed by the operation of the lever, downshifting to the first speed stage is automatically performed when the vehicle speed becomes extremely low so that the vehicle can start again in the first speed stage after stopping. Upshifting is then performed by a subsequent lever operation. Therefore, once downshifting to the first speed stage has been performed due to locking of tires, the first speed stage remains to be established even after the tire gripping has been recovered. This will force the driver to perform upshifting to a speed stage that suits the vehicle speed. In order to eliminate this kind of disadvantage, the following arrangement is employed. Namely, when the vehicle speed to be detected by the vehicle speed sensor 22 has suddenly decelerated due to locking of tires, i.e., when the vehicle speed has decreased at a deceleration above a predetermined value, a flag FLOCK which is set to "1" for a predetermined period of time is used to thereby prohibit downshifting when FLOCK = 1.

[0135] FIG. 19 shows shift selection processing using FGFAIL and FLOCK. In this processing, a discrimination is made first in step S401 as to whether the speed stage G(SH) to be designated by the speed stage designating signal SH is the same as the speed stage G(SHO) that has been designated so far. If $G(SH) \neq G(SHO)$, a discrimination is made in step S402 whether G(SH) is of a higher speed stage than G(SHO). If $G(SH) > G(SHO)$, the upshifting flag FUP is set to "1" in step S403. If $G(SH) < G(SHO)$, a discrimination is made in step S404 whether FLOCK = 1 or not. If FLOCK = 0, FUP is reset to "0" in step S405. Then, a discrimination is made in step S406 as to whether MAT is set to "A,B" or not, i.e., whether the control for speed changing is going on or not. If MAT = A,B, a switchover speed change flag FCS is set to "1" in step S407. If MAT \neq A,B, FCS is reset to "0" in step S408. Then, in step S409, a discrimination is made as to whether FCS = 1 or not. If FCS = 0, a discrimination is made in step S410 whether FUP = 1 or not. If FUP = 1, the program proceeds to step S411 to perform upshifting control. If FUP = 0, the program proceeds to step S412 to perform downshifting control. If FCS = 1, a discrimination is made in step S413 whether FGFAIL = 1 or not. If FGFAIL = 0, a discrimination is made in step S414 whether FUP = 1 or not. If FUP = 1, a switchover upshifting control is performed in step S415. If FUP = 0, a switchover downshifting control is performed in step S416. If FGFAIL = 1, the processing is terminated or ended to prohibit the switchover speed changing. When a discrimination of FLOCK = 1 is made in step S404, the processing is also directly ended to prohibit downshifting. Since FLOCK is reset to "0" after a predetermined period of time, it is only during the predetermined period of time after the occurrence of locking of tires that the downshifting is prohibited. Thereafter, downshifting is allowed in preparation for stopping of the vehicle.

[0136] In the setting processing of FGFAIL, there is used a timer value TMG(N) which is obtained by counting the time during which "Gratio" lies between those lower limit value YG(N)L and upper limit value YG(N)H for judging the engagement of hydraulic clutch which are set based on the gear ratio of the speed stage G(N) that has been established at the time of non-speed changing. TMG(N) is prepared for each of the speed stages. As shown in FIG. 20A, a discrimination is made first in step S1100 as to whether MAT is set to "A,0" or "0,B", i.e., whether it is in a non-speed-change time. If it is in non-speed-change time, a discrimination is made in step S1101 whether "Gratio" falls within a range between the upper and lower limit values YG(N)L, YG(N)H of the first speed stage. If it falls within this range, a timer value TMG(1) for the first speed stage is added in step S1102. If it falls outside the above-described range, TMG(1) is subtracted in step S1103. Then, similar processings are performed in steps S1104, S1105, S1106 for the second speed stage, in steps S1107, S1108, S1109 for the third speed stage, in steps S1110, S1111, S1112 for the fourth speed stage, and in steps S1113, S1114, S1115 for the reverse running stage to thereby perform adding or subtracting processing of timer values TMG(2), TMG(3), TMG(4), and TMG(R) for the second speed stage through fourth speed stage and the reverse running stage. Therefore, each of these timer values TMG(1) - TMG(R) becomes a difference between the accumulated time at which "Gratio" falls within the corresponding range of upper and lower limit values YG(1)L, YG(1)H through YG(R)L, YG(R)H and the accumulated time at which "Gratio" falls outside this range. If the detection of "Gratio" is accurate, the timer value TMG(N) for the speed stage G(N) that has been established right before the speed changing prior to the switchover speed changing will become a large enough value. Therefore, as shown in FIG. 20B, a comparison is made in step S1116 between TMG(N) and a predetermined threshold value YTMG. When $TMG(N) > YTMG$, setting of FGFAIL = 0 is made in step S1117 and, when $TMG(N) \leq YTMG$, setting of FGFAIL = 1 is made in step S1118.

[0137] As shown in FIG. 21A, there is measured the time t for the vehicle speed V which is detected by the vehicle speed sensor 22 to decrease from a first predetermined vehicle speed YVH (e.g., 40 km/h) which is set relatively high down to a second predetermined vehicle speed YVL (e.g., 10 km/h) which is set relatively low. When this time t has fallen below a predetermined value, FLOCK is set to "1" for a predetermined period of time. This predetermined value is set, for example, such that $(YVH - YVL) / t$ becomes about 1G (the acceleration of gravity). Details of setting processing of FLOCK are shown in FIG. 21B. First, in step S1001, a discrimination is made whether the vehicle speed V has fallen below YVH. If $V \geq YVH$, the program proceeds to step S1002, in which the remaining time t_m of a subtractive timer which is different from the above-described timer for speed change control is set to an initial value of t_{mst} . Then, in step S1003, a resetting of FLOCK = 0 is made. If $V < YVH$, a discrimination is made in step S1004 whether the vehicle speed V has fallen below YVL. If $V \geq YVL$, the program proceeds to step S1003. When $V < YVL$, the program proceeds to step S1005 for discriminating whether FLOCK = 1 or not. If FLOCK = 0, a discrimination is made in step

S1006 whether the time t required for the vehicle speed V to lower from YVH to YVL ($tmst - tm$) has fallen below a predetermined time $Ytmlock$. If $tmst - tm \leq Ytmlock$, a discrimination is made in step S1007 whether tm has become zero (whether a time $tmst$ has elapsed from the condition $V < YVH$ has been satisfied). If $tm \neq 0$, a setting of $FLOCK = 1$ is made in step S1008. From the next time, as long as $V < YVH$, the program proceeds from step S1005 to step S1008 and is held to $FLOCK = 1$ for a predetermined period of time until a condition of $tm = 0$ ($tmst - Ytmlock$) is satisfied. This predetermined period of time is set a little longer, e.g., for about 10 seconds, than the braking time in case a temporary brake is applied without an intention of parking.

[0138] Details of in-gear control are shown in FIG. 23. An explanation will now be made with reference to FIG. 22 which schematically shows the changes in the ON pressure and the "Gratio" at the time of gear engagement (or gear-in). In the in-gear control, a discrimination is made first, in step S501, whether MAT is set to one of "2,0", "4,0", and "6,0". In the first processing, a judgement of "NO" is made in step S501. In step S502, TM is set to $TMST$ and, in step S503, $QINGA$ which is a value of the ON pressure in the response pressure mode is set to an appropriate value depending on the throttle opening. The value $QINGA$ decreases with the lapse of time. Then, in step S504, MAT is set to "2,0" and thereafter, in step S505, $QING$ which is a command value of the ON pressure in the in-gear control is set to $QINGA$. Then, the program proceeds to step S506, in which the proportional valve selection processing is performed. In this processing, the command value of the output pressure of that one of the first and the second solenoid proportional valves 17_1 , 17_2 which controls the hydraulic pressure of the hydraulic clutch to be engaged at the time of gearing in is made to be $QING$, and the command value of the output pressure of the other thereof is made to be atmospheric.

[0139] In the next processing, since MAT has already been set to "2,0" in step S504 last time, a judgement of "YES" is made in step S501. The program thus proceeds to step S507, in which a discrimination is made whether or not the time of lapse from the start of gear engagement ($TMST - TM$) has reached a limit value $YTMING1$ for judging the presence or absence of abnormality. When $TMST - TM \geq YTMING1$, the program proceeds to step S508, in which an in-gear completion processing is performed. In this processing, MAT is set to "A,0" (at the time of gear-in to the first speed stage, third speed stage, and reverse stage), or to "0,B" (at the time of gear-in to the second speed stage) and also TM is reset to zero. If $TMST - TM < YTMING1$, the program proceeds to step S509 for discriminating whether MAT has been set to "2,0" or not, and a judgement of "YES" is made therein. At this time, the program proceeds to step S510, in which a discrimination is made whether the time of lapse from the start of gear-in has reached a predetermined time $YTMING2$. While $TMST - TM < YTMING2$, the program proceeds to step S503 and following steps, and a control in the response pressure mode is performed.

[0140] Once $TMST - TM \geq YTMING2$, the program proceeds to step S511, and MAT is set to "4,0". Then, in step S512, a discrimination is made whether "Gratio" has exceeded a predetermined value $YGINGs$ or not. When "Gratio" $< YGINGs$, a flag $FING$ is set to "1" in step S513 and further, in step S514, the value of TM at that time is stored in memory as TMD . Then, in step S515, $\Delta QINGX$ is set to a relatively large value. Once the hydraulic clutch begins to be engaged and the condition of "Gratio" $\geq YGINGs$ is satisfied, a discrimination is made in step S516 whether $FING = 1$ or not. If $FING = 0$, the program proceeds to step S515. If $FING = 1$, the program proceeds to S517, in which a discrimination is made whether the time required for the condition of "Gratio" $\geq YGINGs$ to be satisfied from the start of gear-in ($TMST - TMD$) has exceeded a predetermined time $YTMING3$. Then, if $TMST - TMD < YTMING3$, $\Delta QINGX$ is set in step S518 to a relatively small value. If $TMST - TMD \geq YTMING3$, $\Delta QINGX$ is set in step S519 to an intermediate value. Once $\Delta QINGX$ has been set in this manner, the program proceeds to step S520, in which $QINGX$ is set to a value which is obtained by adding $\Delta QINGX$ to the previous value of $QINGX$. Then, in step S521, the value $QINGB$ of the ON pressure in the addition mode is set to a value which is obtained by adding $QINGX$ to the final value of $QINGA$. And in step S522, $QING$ is set to $QINGB$. Since MAT has already been set to "4,0" last time in step S511, a judgement of "NO" is made in step S509. The program proceeds to step S523 for discriminating whether MAT has been set to "4,0" or not, and a judgement of "YES" is made therein. At this time, the program proceeds to step S524, in which a discrimination is made whether "Gratio" has exceeded that lower limit value $YG(N)L$ for judgement of the clutch engagement which is set based on the gear ratio of the speed stage to be established at the time of gear-in. While "Gratio" $< YG(N)L$, the program proceeds to step S511 and following steps, and the control in the addition mode is performed.

[0141] When "Gratio" $\geq YG(N)L$, the program proceeds to step S525, and MAT is set to "6,0". From the next time, a judgement of "NO" is made in step S523, and the program proceeds directly to step S525. Then, the program proceeds to step S526, in which a discrimination is made whether or not "Gratio" $\geq YG(N)L$ or not. If "Gratio" $< YG(N)L$, the value of TM at that time is stored in memory as $TMSTE$ in step S527, and the program then proceeds to step S528. If "Gratio" $\geq YG(N)L$, the program proceeds directly to step S528. In step S528, $QINGC$ is set to a value which is obtained by adding $\Delta QINGC$ to the previous value of $QINGC$. Then, the program proceeds to step S529, in which a discrimination is made whether the time of duration of the condition of "Gratio" $\geq YG(N)L$, i.e., the condition of clutch engagement completion ($TMSTE - TM$) has reached a predetermined time $YTMING4$. Then, while $TMSTE - TM < YTMING4$, the program proceeds to step S530, in which $QING$ is set to a value which is obtained by adding $QINGC$ to the final value of $QINGB$, and the control of the ON pressure in the end mode is performed. Once $TMSTE - TM \geq YTMING4$, the program proceeds to step S508, and the in-gear completion processing is performed.

[0142] According to the above-described control, since $\Delta QINGX$ is set to a large value until the condition of "Gratio" $\geq YGINGS$ has been attained in an in-gear mode, the boosting speed of the ON pressure becomes large. Thereafter, the boosting speed of the ON pressure becomes small. Therefore, it becomes possible to shorten the time lag at the time of gear-in, and also to prevent the in-gear shocks. In addition, in a condition in which the hydraulic pressure is likely to lower due to a high temperature or the like, it takes time for the hydraulic clutch to start engagement. Under this kind of conditions, if the boosting speed of the ON pressure from the time when the condition of "Gratio" $\geq YGINGS$ has been satisfied is made small, it takes time for the hydraulic clutch to complete engagement, resulting in a large time lag. In the present embodiment, on the other hand, if it takes time to the start of engagement of the hydraulic clutch, the condition becomes $TMST - TMD \geq YTMING3$, and $\Delta QINGX$ is set to an intermediate value. Therefore, the boosting speed of the ON pressure after the condition has become "Gratio" $\geq YGINGS$ does not lower so much, with the result that the time lag can be shortened.

[0143] If a switching is made to the forward range such as "D₄" or the like while the vehicle is running in the reverse range "R", "Gratio" sometimes remains to exceed $YGINGS$. The reason is as follows. Namely, "Gratio" is obtained by $Nout / Nin$, and the rotational speed of the output shaft 7 is zero while the vehicle is stopped. If the rotational speed of the output shaft is made to be $Nout$ as it is, "Gratio" will remain to be zero even if Nin lowers as a result of lowering of the rotational speed of the engine at the time of gear-in. As a solution, $Nout$ is set to a value obtained by adding a predetermined level-up value to the rotational speed of the output shaft so that "Gratio" can increase as a result of lowering of Nin . When a switchover is made from "R" range to the forward range, the output shaft 7 is switched from the condition of rotating in the reverse direction to the condition of rotating in the normal direction. The rotational speed of the output shaft once becomes zero in the course of this switching but, since $Nout$ has been levelled up as described above, the condition sometimes remains to be "Gratio" $\geq YGINGS$. At the time of switching from the "R" range to the forward range, it is desired to accelerate the boosting of the ON pressure so that the output shaft 7 can be switched at an early stage to the condition of rotating in the normal direction. In the present embodiment, if the condition remains to be "Gratio" $\geq YGINGS$, $FING$ becomes zero ($FING = 0$). The value $\Delta QINGX$ is thus maintained in a large value, whereby the above desire can be met.

[0144] Further, if a high speed stage which suits a high vehicle speed is established according to the speed change map when switching is made to the forward range such as "D₄" or the like while running at a high speed in the "R" range, the transmission torque to the output shaft 7 becomes small, and it takes time before the direction of rotation of the output shaft 7 is switched. During that time, the hydraulic clutch keeps on slipping, and the durability of the hydraulic clutch is deteriorated. In such a case, the above-described disadvantage can be eliminated by making the following arrangement. Namely, by providing a vehicle speed sensor that can discriminate the direction of rotation of the wheels, or by providing a similar means, a discrimination is made whether the running direction of the vehicle is forward or reverse. If the vehicle is discriminated to be running in the reverse direction in the forward range, a speed stage that is lower than usual is established. FIG. 24 shows the control for that purpose. If a discrimination is made in step S601 that the transmission is in the forward range, a discrimination is made in step S602 whether the vehicle is running in the reverse direction or not. If the result of this discrimination is "NO", an ordinary speed change map is selected as the speed change map in step S603. If the vehicle is discriminated to be running in the reverse direction, a speed change map in which a measure is taken against the reverse running (also called a reverse-running-measure speed change map) is selected as the speed change map. The reverse-running-measure speed change map is set, for example, such that the second speed stage or the first speed stage is established when, in an ordinary speed change map, the third speed stage or the second speed stage will be established, respectively.

[0145] If there is provided a means for detecting the forward or reverse running such as a vehicle speed sensor equipped with a function for discriminating the direction of rotation, the cost becomes high. Therefore, without using a special sensor, the selection of the speed change map at the time of switching from the "R" range to the forward range may be made by performing the following control. This control is performed by using a flag $FREV$ which is set to, and maintained at, "1" when the vehicle speed exceeds a predetermined value in the "R" range, and also when the vehicle speed never falls below a predetermined value in the "N" range. Details of this control are shown in FIG. 25A. If a discrimination is made in step S701 that the range is in the forward range, a discrimination is made in step S702 whether $FREV = 1$ or not. If $FREV = 0$, an ordinary speed change map is selected as the speed change map in step S703. If $FREV = 1$, a reverse-running-measure speed change map which is similar to the one mentioned hereinabove is selected in step S704. Then, in step S705, a discrimination is made whether MAT is set to any one of "2,0", "4,0", and "6,0". When the result of this discrimination becomes "NO", i.e., when the in-gear control has been completed, $FREV$ is reset to "0" in step S706 and, from the next time, an ordinary speed change map is selected. Details of the setting processing of $FREV$ are shown in FIG. 25B. When the range is discriminated to be "R" range in step S801, a discrimination is made in step S802 whether the reverse transmission train GR has been established or not. If it has been established, a discrimination is made in step S803 whether or not the vehicle speed V has exceeded a predetermined value YVa (e.g., 10 km/h). If $V > YVa$, $FREV$ is set to "1" in step S804. Then, if the range is discriminated to be "N" range in step S805, a discrimination is made in step S806 whether the vehicle speed V has fallen below the predetermined value

YVa. When $V < YVa$, FREV is reset to "0" in step S807. According to this arrangement, if FREV is set to "1" by satisfying the condition of $V > YVa$ in "R" range, the condition of $FREV = 1$ is maintained unless the condition becomes $V < YVa$ in "N" range. Therefore, when a switchover is made from "R" range to the forward range via "N" range, it can be discriminated that the vehicle is in the reverse running if $FREV = 1$. It follows that, during the reverse running in the forward range, the reverse-running-measure speed change map is selected, and the switching from the reverse running condition to the forward running condition can be accelerated. As a consequence, the durability of the hydraulic clutches can be improved. If an arrangement is made such that, at the time of switching from the forward range to "R" range, the reverse speed stage GR is established when the vehicle speed has fallen below the predetermined value as described above, it cannot make a hasty conclusion that the vehicle is running in the reverse direction even if $V > YVa$ in "R" range. Therefore, in the present embodiment, the following arrangement has been made to prevent a misjudgment. Namely, a setting of $FREV = 1$ is made only when $V > YVa$ in a condition in which the reverse speed stage GR is established in "R" range, and a setting of $FREV = 1$ is not made when the reverse speed stage GR is not established in the "R" range.

[0146] There is a case in which, while the vehicle is running, the electronic control unit (ECU) 20 temporarily fails due to voltage drop and, once the voltage is up or restored, ECU20 is re-started after initialization operation. During the failure of ECU20, the electric power supply to all the solenoid valves is stopped, and the first and the second shift valves 12₁, 12₂ and the changeover valve 13 are switched to the left position, whereby the fourth speed stage is established. Further, even if ECU20 is re-started, parameter values such as the vehicle speed, throttle opening, or the like cannot be read out during the initialization of ECU20. Therefore, the speed stage according to the speed change map cannot be designated. Therefore, conventionally, it is so arranged that a high speed stage is established during the initialization (to prevent the engine overrotation by the establishment of a low speed stage while running at a high speed) and that, after completion of initialization, the speed changing is made to a speed stage according to the speed change map. In this system, however, when ECU20 fails while the vehicle is running at a low speed stage, the rotational speed of the engine lowers due to establishment of a high speed stage until the completion of initialization. Consequently, at the time of downshifting to the low speed stage after completion of initialization, it becomes necessary to largely increase the rotational speed of the engine. Much time is therefore required for downshifting, and the restoration of the driving force is delayed.

[0147] As a solution, in the hydraulic oil circuit in the present embodiment, an arrangement is made such that the transmission can be made to a neutral condition even when the manual valve 11 has been switched to the running range such as "R", "D₄", "D₃", "2", "1". Namely, if the first and the second shift valves 12₁, 12₂ and the changeover valve 13 are in the condition of speed changing, and if the output pressures of the first and the second solenoid proportional valves 17₁, 17₂ are in the atmospheric pressure, the hydraulic pressure in any of the hydraulic clutches C1 - C4 also becomes atmospheric, with the result that the transmission becomes neutral. Then, when ECU20 has been re-started, a discrimination is made in step S901 whether initialization has been completed or not as shown in FIG. 26. While the initialization is going on, a neutral signal is outputted in step S902, and a flag FINT is set to "1" in step S903. The neutral signal makes the first and the second shift valves 12₁, 12₂ and the changeover valve 13 to a condition of speed changing, e.g., to a speed changing condition of third speed \leftrightarrow fourth speed in which the first and the second shift valves 12₁, 12₂ are in the left position and the changeover valve 13 is in the right position, and also in which the output pressures of both the first and the second solenoid proportional valves 17₁, 17₂ are made to be atmospheric, whereby the transmission becomes the neutral condition. When the initialization has been completed, the program proceeds to step S904, in which a discrimination is made whether $FINT = 1$ or not. Since $FINT = 1$ right after the completion of the initialization, a judgement of "YES" is made in step S904. At this time, the program proceeds to step S905, in which a discrimination is made whether the range is in the running range or not. If it is not in the running range, i.e., if it is in "N" or "P" range, FINT is reset to "0" in step S906, and the program proceeds to step S907 to perform an ordinary control. The processing at the time of starting of ECU20 by switching on the ignition key is performed by this route. When it is in the running range, the program proceeds to step S908, and the in-gear control to establish the speed stage according to the speed change map is started. Then, in step S909, a discrimination is made whether MAT is set to one of "2,0", "4,0" and "6,0". If the result of this discrimination has become "NO", i.e., when the in-gear control has been completed, FINT is reset to "0" in step S910. In this manner, after the completion of the in-gear control, a judgement of "NO" is made in step S904, and an ordinary control is performed. According to this arrangement, even if the fourth speed stage is established by the failure in ECU20 while the vehicle is running in a low speed stage, the neutral condition is maintained, once ECU20 is re-started, until the initialization is completed.

[0148] Therefore, during that period of time, the rotational speed of the engine increases, and the gear-in to a lower speed stage after the completion of the initialization is made in good response, resulting in an early recovery of the driving force.

Claims

1. A control apparatus for a hydraulically operated vehicular transmission (1) having a plurality of speed stages (G1-G4, GR) to be established by a selecting operation of a plurality of hydraulic engaging elements (C1-C4), said transmission (1) being coupled to an engine of a vehicle via a fluid torque converter (2), said apparatus comprising

- means (S108-4, S108-5) for detecting a speed change developing degree of a rotational speed of the engine at a time of start of downshifting, said speed change developing degree being dependent on an increase in the rotational speed of the engine due to slipping in the fluid torque converter (2); and
- means for boosting a hydraulic pressure during downshifting of a hydraulic engaging element on the disengaging side at the time of start of downshifting a value of boosting being dependent on the speed change developing degree,
- means for detecting the rotational speed of the engine at the time of start of downshifting;
- means for detecting a rotational speed of an input shaft (3) of the transmission (1) at the time of start of downshifting;
- wherein a scheduled speed ratio of the fluid torque converter (2) at a time of completion of downshifting is defined to be a reference rotational speed ratio; the rotational speed of the engine to be obtained by said reference rotational speed ratio and the rotational speed of the input shaft (3) of the transmission at the time of start of downshifting is defined to be a reference value in function of the rotational speed of the engine; and the rotational speed of the engine to be obtained by said reference rotational speed of the engine, a speed ratio before start of downshifting, and a speed ratio after completion of downshifting is defined to be a target rotational speed of the engine; and
- means for computing said speed change developing degree as a ratio of a difference (K(etrm)) between an output value of the engine at the time of start of downshifting and a reference value

characterized in that

said computing computes a boosting correction value as function of the difference between the rotational speed of the engine at the time of start of downshifting and the reference rotational speed of the engine to a difference between said target rotational speed of the engine and said reference rotational speed of the engine and wherein the boosting correction value (QDNOFFZ) utilized by said means for increasing is computed by multiplying a reference correction value (QDNOFFZ0) by said ratio (K(etrm)).

Patentansprüche

1. Steuervorrichtung für ein hydraulisch betätigtes Fahrzeuggetriebe (1), welches eine Vielzahl von Gangstufen (G1-G4, GR) aufweist, die durch eine Auswahloperation zur Auswahl aus einer Vielzahl von hydraulischen Eingriffselementen (C1-C4) einzustellen sind, wobei das betreffende Getriebe (1) mit einem Motor eines Fahrzeugs über einen Fluid-Drehmomentwandler (2) verbunden ist, umfassend

Mittel (S108-4, S108-5) zur Ermittlung eines Gangwechsel-Entwicklungsgrades aus einer Drehzahl des Motors zur Zeit des Beginns eines Herunterschaltens, wobei der betreffende Gangwechsel-Entwicklungsgrad von einer Zunahme in der Drehzahl des Motors aufgrund eines Schlupfes in dem Fluid-Drehmomentwandler (2) abhängt, Mittel zur Verstärkung eines hydraulischen Drucks während des Herunterschaltens eines hydraulischen Eingriffselements auf der Ausrückseite zur Zeit des Beginns des Herunterschaltens,

wobei ein Verstärkungswert von dem Gangwechsel-Entwicklungsgrad abhängt,

Mittel zur Ermittlung der Drehzahl des Motors zur Zeit des Beginns des Herunterschaltens,

Mittel zur Ermittlung einer Drehzahl einer Eingangswelle (3) des Getriebes (1) zur Zeit des Beginns des Herunterschaltens,

wobei ein planmäßiges Drehzahlverhältnis des Fluid-Drehmomentwandlers (2) zur Zeit der Beendigung des Herunterschaltens als Referenz-Drehzahlverhältnis festgelegt ist,

wobei die Drehzahl des Motors, die durch das genannte Referenz-Drehzahlverhältnis und die Drehzahl der Eingangswelle (3) des Getriebes zur Zeit des Beginns des Herunterschaltens zu erhalten ist, als Referenzwert in einer Funktion der Drehzahl des Motors bestimmt ist

und wobei die Drehzahl des Motors, die durch die betreffende Referenz-Drehzahl des Motors, ein Drehzahlverhältnis vor Beginn des Herunterschaltens und ein Drehzahlverhältnis nach Beendigung des Herunterschaltens zu erhalten ist, als Ziel-Drehzahl des Motors bestimmt ist,

und Mittel zur Berechnung des genannten Gangwechsel-Entwicklungsgrades als Verhältnis einer Differenz (K(etrm)) zwischen einem Abgabe- bzw. Ausgangswert des Motors zur Zeit des Beginns des Herunterschaltens und

einem Referenzwert,

dadurch gekennzeichnet, dass die genannte Berechnung einen Verstärkungs-Korrekturwert als Funktion der Differenz zwischen der Drehzahl des Motors zur Zeit des Beginns des Herunterschaltens und der Referenz-Drehzahl des Motors zu einer Differenz zwischen der genannten Ziel-Drehzahl des Motors und der genannten Referenz-Drehzahl des Motors berechnet

und wobei der Verstärkungs-Korrekturwert (QDNOFFZ), der durch die genannten Mittel zur Verstärkung genutzt wird, dadurch berechnet wird, dass ein Referenz-Korrekturwert (QDNOFFZ0) mit dem genannten Verhältnis (K(etrm)) multipliziert wird.

Revendications

1. Dispositif de commande pour une transmission de véhicule actionnée de façon hydraulique (1) ayant une pluralité de rapports de vitesse (G1-G4, GR) à établir par une opération de sélection d'une pluralité d'éléments d'embrayage hydraulique (C1-C4), ladite transmission (1) étant couplée à un moteur d'un véhicule par l'intermédiaire d'un convertisseur de couple fluide (2), ledit dispositif comprenant

- des moyens (S 108-4, S108-5) pour détecter un degré de développement de variation de vitesse d'une vitesse de rotation du moteur à un instant de départ de la rétrogradation, ledit degré de développement de variation de vitesse étant dépendant d'une augmentation de la vitesse de rotation du moteur due au glissement dans le convertisseur de couple fluide (2); et
- des moyens pour amplifier une pression hydraulique pendant la rétrogradation d'un élément d'embrayage hydraulique du côté débrayage à l'instant de départ de la rétrogradation, une valeur d'amplification étant dépendante du degré de développement de variation de vitesse,
- des moyens pour détecter une vitesse de rotation du moteur à l'instant de départ de la rétrogradation ;
- des moyens pour détecter une vitesse de rotation d'un arbre d'entrée (3) de la transmission (1) à l'instant de départ de la rétrogradation ;
- dans lequel un rapport programmé de vitesse du convertisseur de couple fluide (2) à un instant d'exécution de la rétrogradation est défini pour être un rapport de vitesse de rotation de référence ; la vitesse de rotation du moteur, à obtenir selon ledit rapport de vitesse de rotation de référence et la vitesse de rotation de l'arbre d'entrée (3) de la transmission à l'instant de départ de la rétrogradation, est définie pour être une valeur de référence en fonction de la vitesse de rotation du moteur ; et la vitesse de rotation du moteur, à obtenir selon ladite vitesse de rotation de référence du moteur, un rapport de vitesse avant le départ de la rétrogradation et un rapport de vitesse après l'exécution de la rétrogradation, est définie pour être une vitesse de rotation cible du moteur ; et
- des moyens pour calculer ledit degré de développement de variation de vitesse comme un rapport d'une différence (K(etrm)) entre une valeur de sortie du moteur à l'instant de départ de la rétrogradation et une valeur de référence

caractérisé en ce que

ledit calcul calcule une valeur d'amplification de correction en fonction de la différence entre la vitesse de rotation du moteur à l'instant de départ de la rétrogradation et la vitesse de rotation de référence du moteur, sur une différence entre ladite vitesse de rotation cible du moteur et ladite vitesse de rotation de référence du moteur, et dans lequel la valeur d'amplification de correction (QDNOFFZ) utilisée par lesdits moyens d'augmentation est calculée en multipliant une valeur de correction de référence (QDNOFFZ0) par ledit rapport (K(etrm)).

FIG. 1

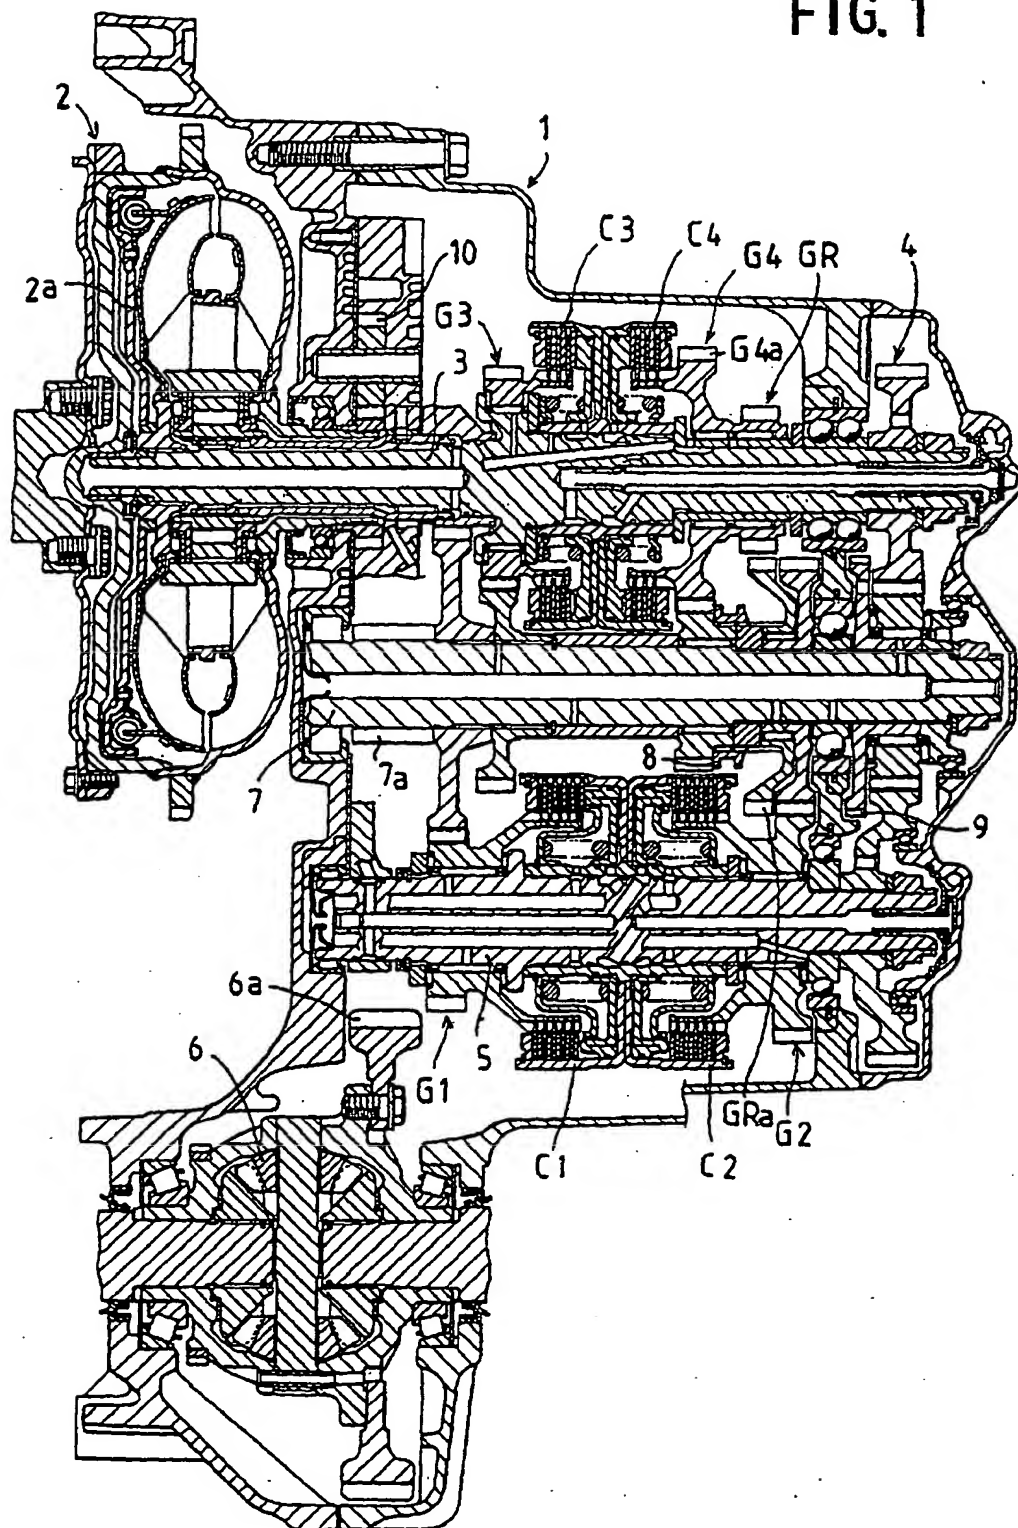


FIG. 2

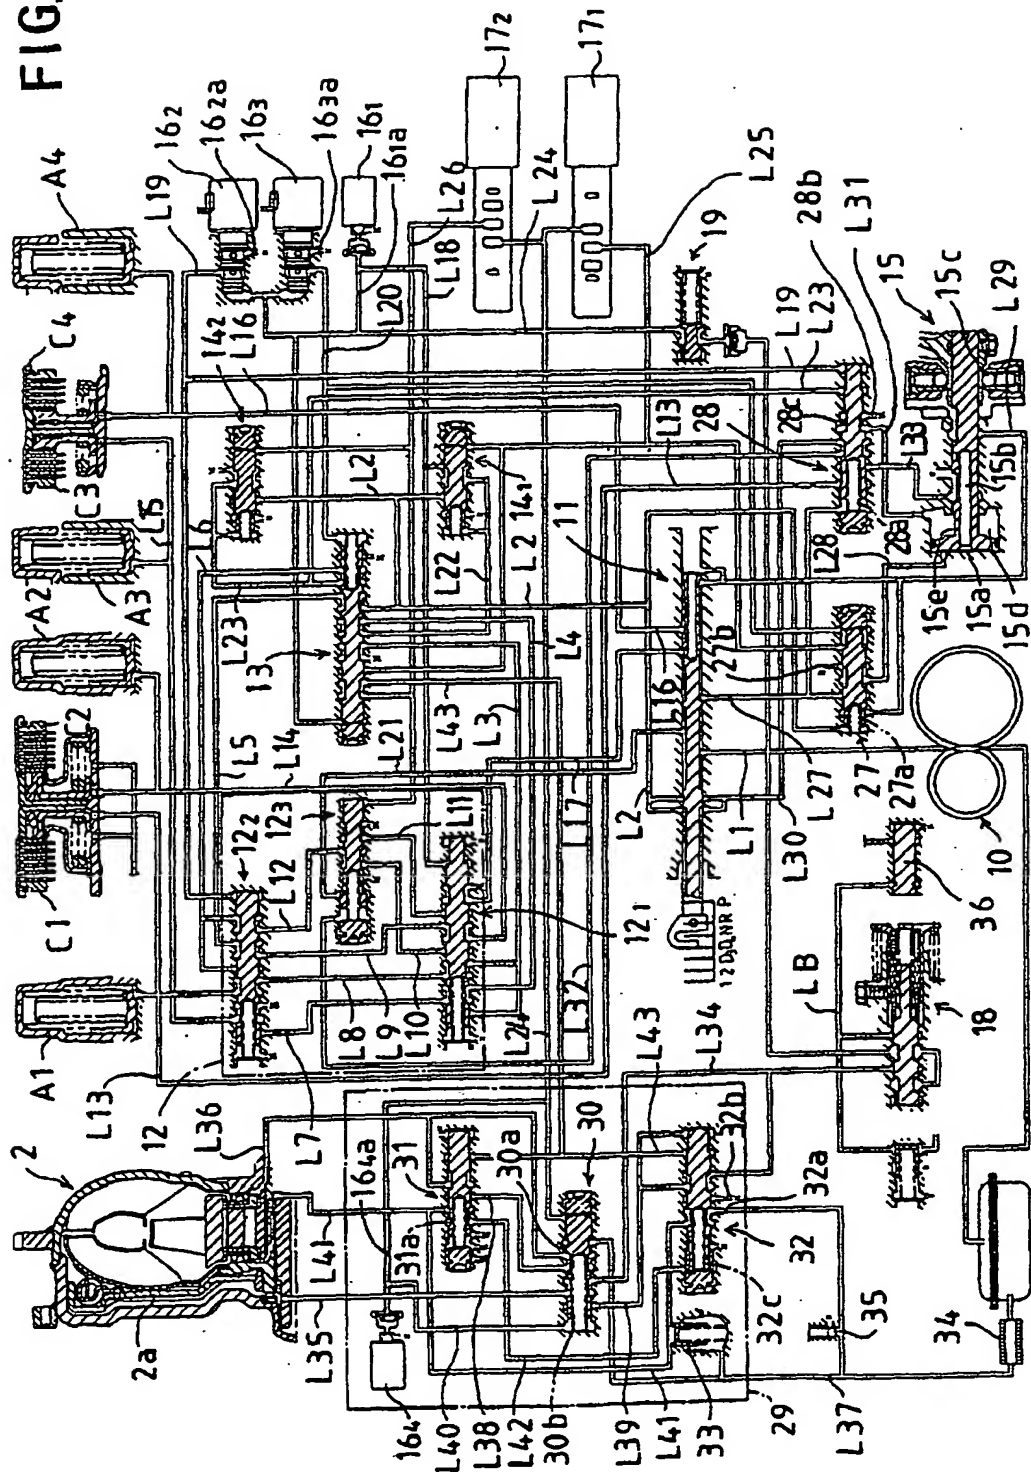


FIG. 3

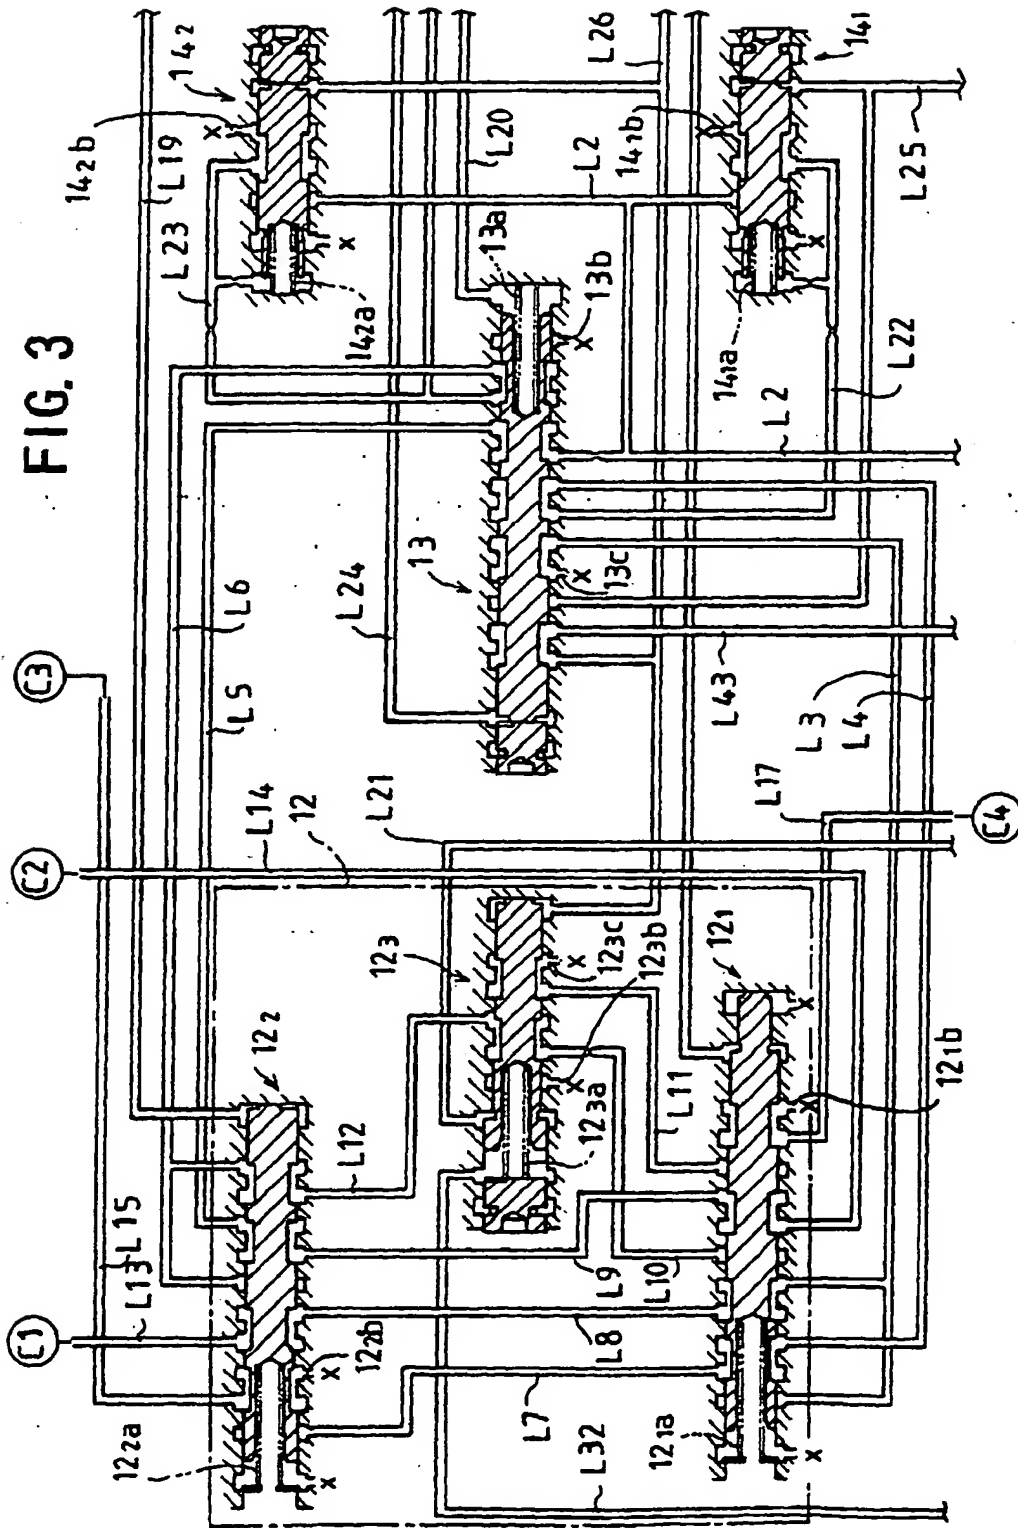


FIG. 4

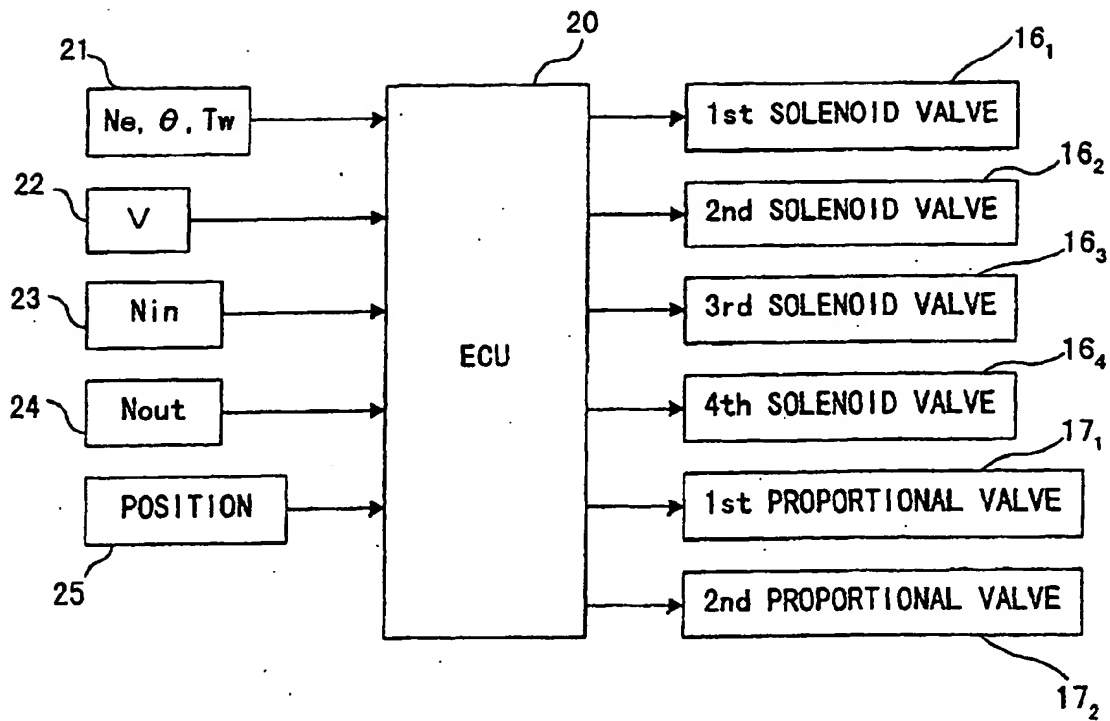


FIG. 5 A

MAT		CONTROL MODE
Hi	Lo	
A	0	1ST SOLENOID PROPORTIONAL VALVE 17, HIGH 2ND SOLENOID PROPORTIONAL VALVE 17, LOW
0	B	1ST SOLENOID PROPORTIONAL VALVE 17, LOW 2ND SOLENOID PROPORTIONAL VALVE 17, HIGH
A	B	UNDER SHIFT CHANGING
2	0	IN-GEAR RESPONSE PRESSURE MODE
4	0	IN-GEAR ADDITION MODE
6	0	IN-GEAR END MODE


FIG. 5 B

M U P		CONTROL MODE
ON	OFF	
0	0	OTHER THAN UPSHIFTING
1	—	RESPONSE PRESSURE MODE
2	—	ADDITION MODE(FORMER)
3	—	ADDITION MODE(LATTER)
4	—	BOTTOM UP MODE(FORMER)
5	—	BOTTOM UP MODE(LATTER)
7	—	END MODE
—	1	INITIAL PRESSURE MODE
—	2	SUBTRACTION MODE(FORMER)
—	3	SUBTRACTION MODE(LATTER)
—	4	BOTTOM DOWN MODE
—	5	TAIL MODE
—	7	END MODE

FIG. 5 C

MDN		CONTROL MODE
ON	OFF	
0	0	OTHER THAN DOWNSHIFTING
1	—	RESPONSE PRESSURE MODE
2	—	LOW PRESSURE CORRECTION MODE
3	—	SYNCHRONOUS MODE
4	—	END MODE
—	1	INITIAL PRESSURE MODE
—	2	LOW PRESSURE HOLDING MODE
—	3	TAIL MODE
—	4	END MODE

FIG. 6

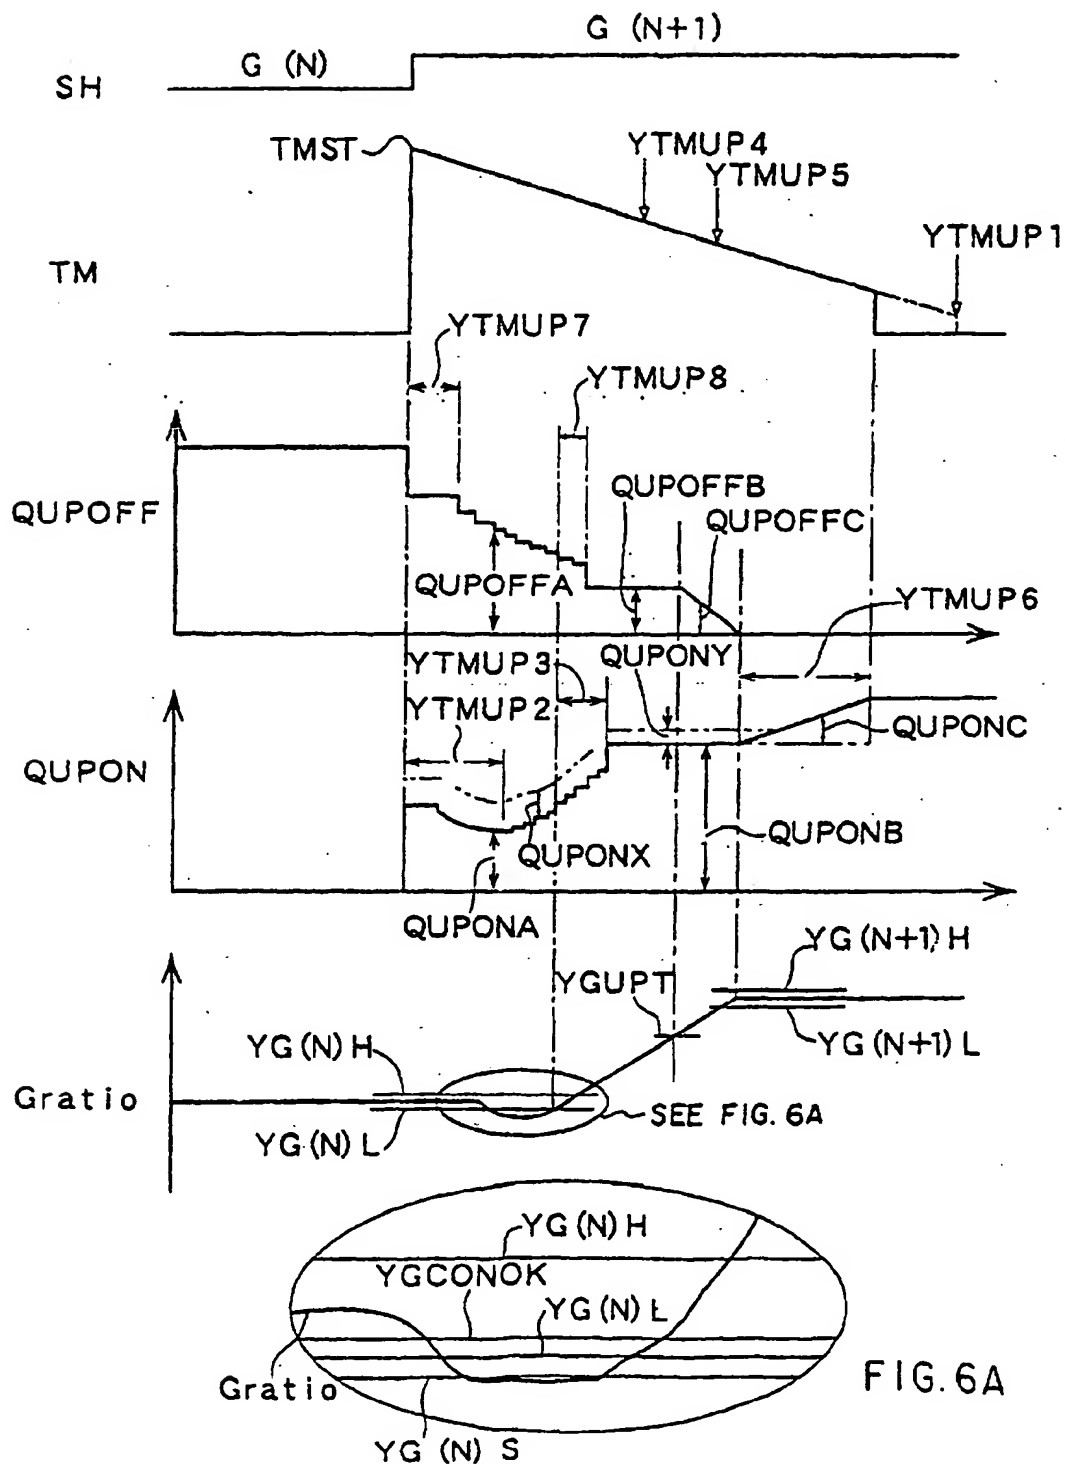

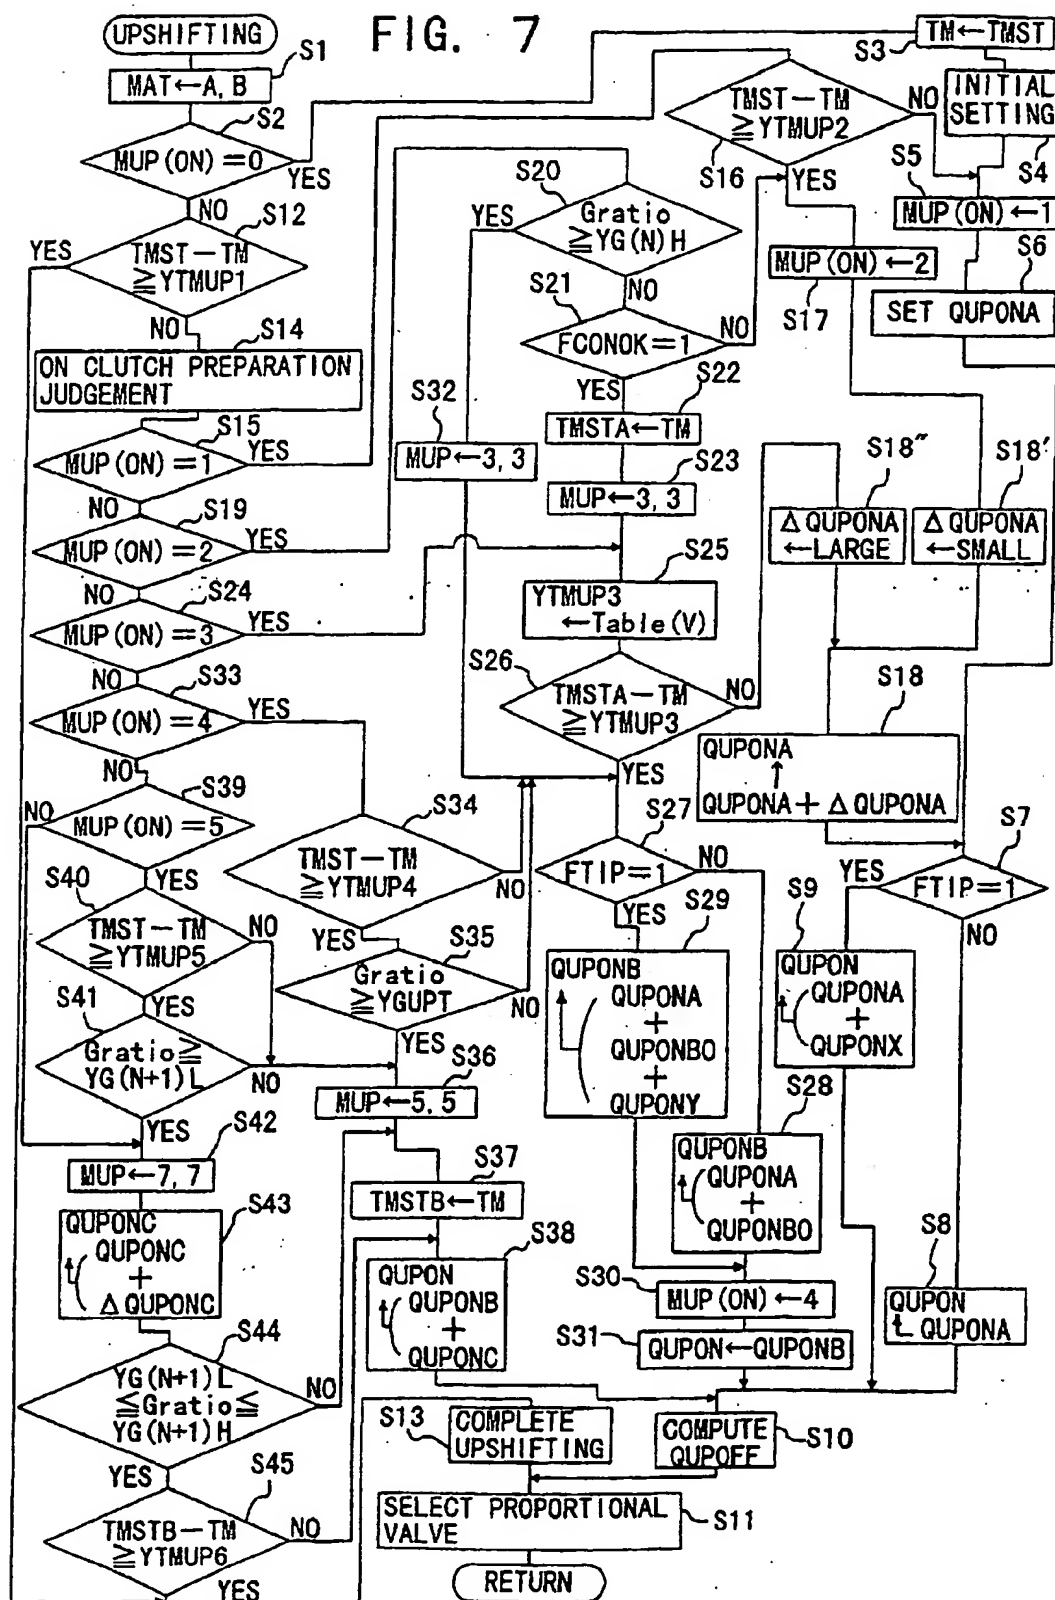


FIG. 8

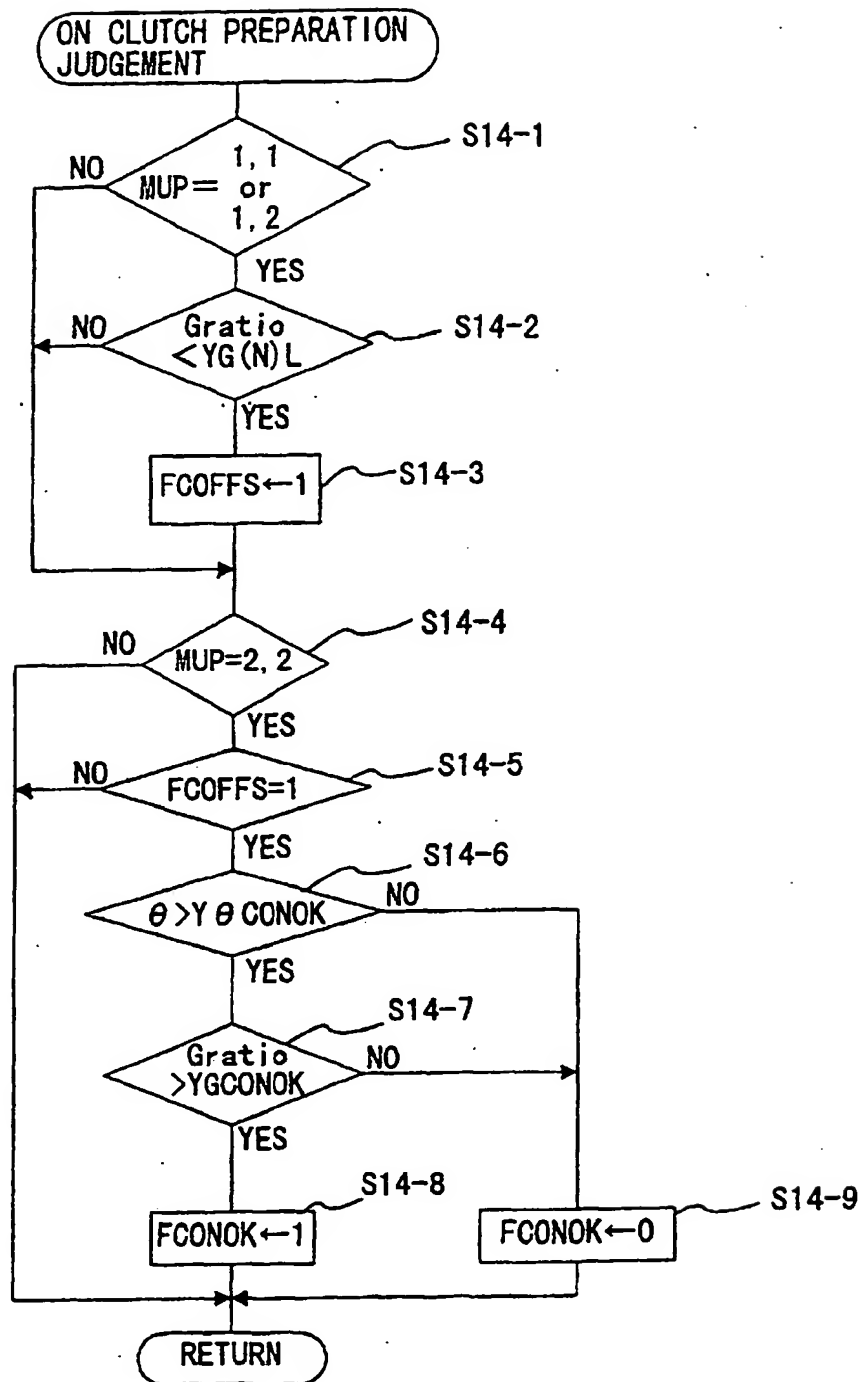


FIG. 9

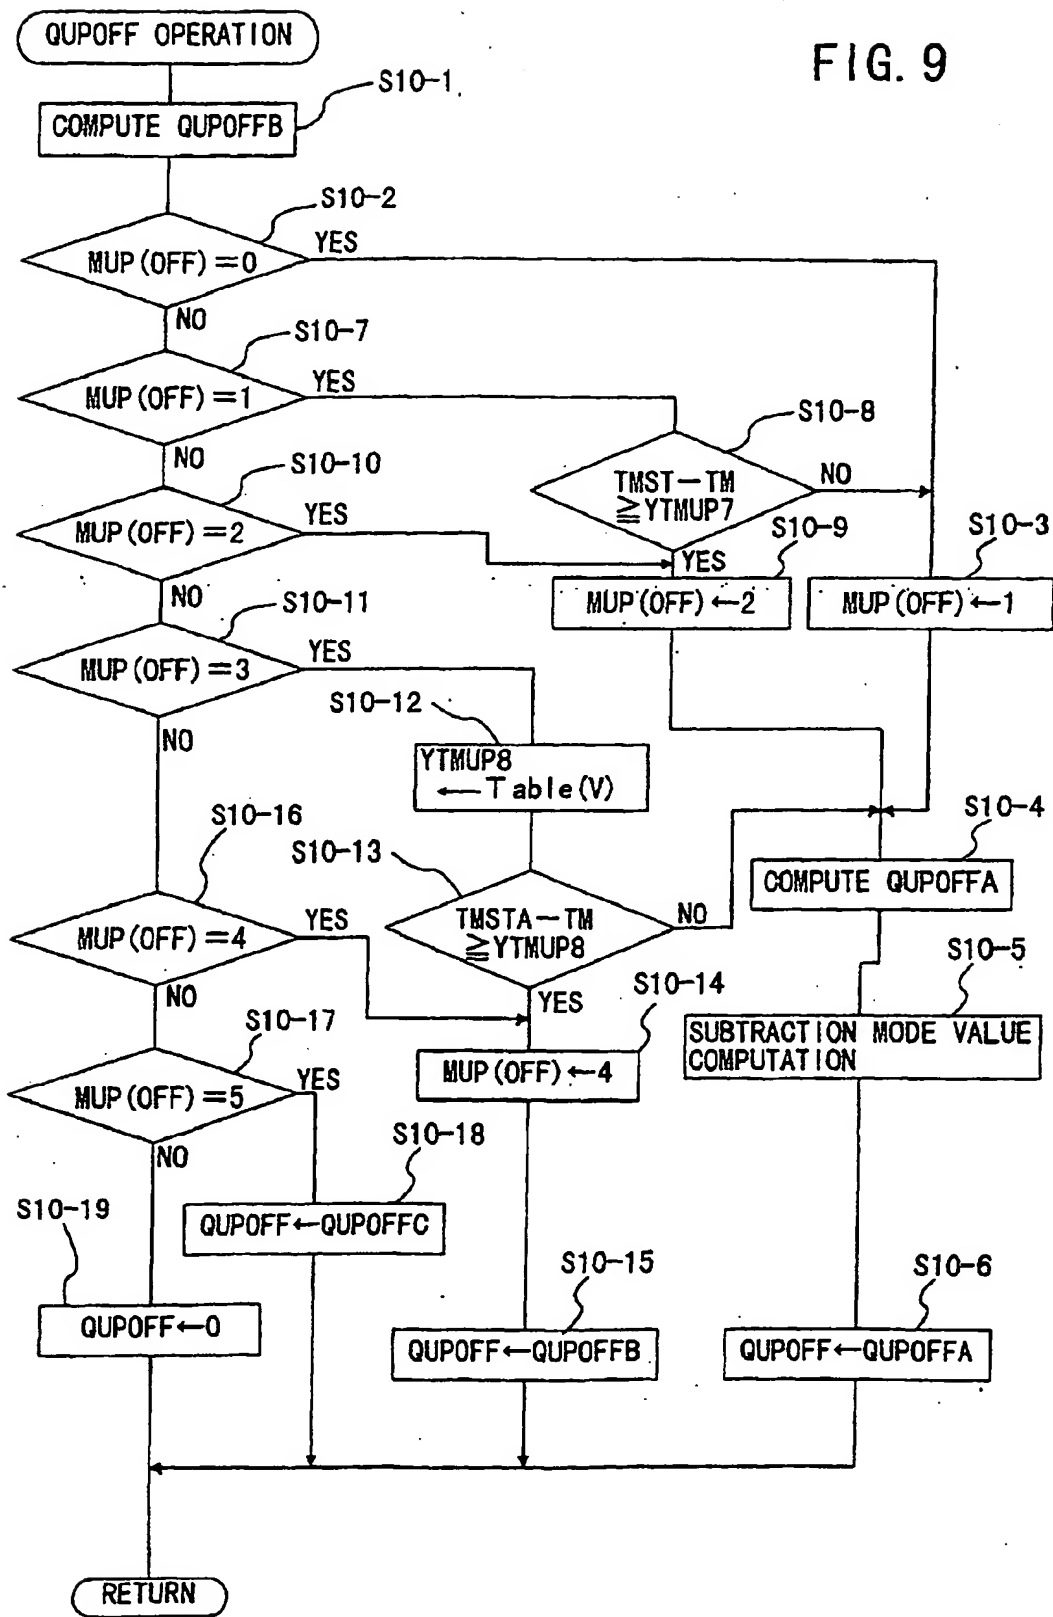


FIG. 10

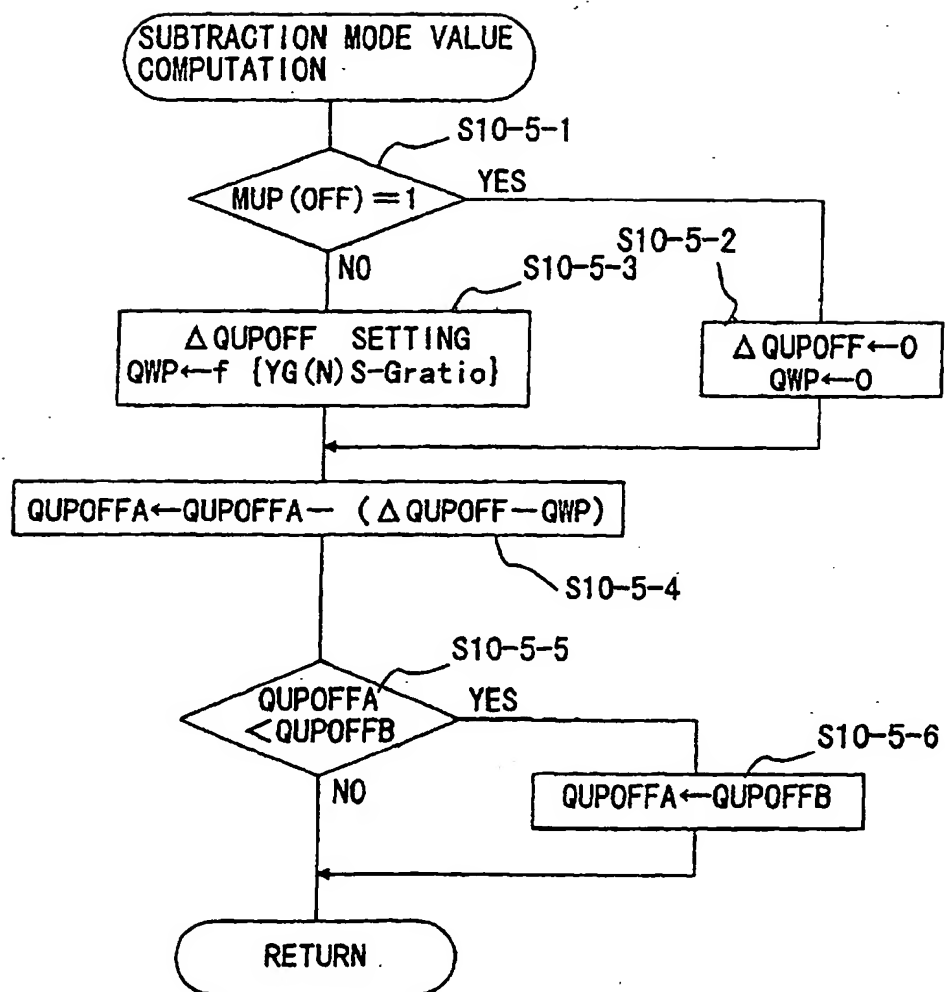


FIG. 11

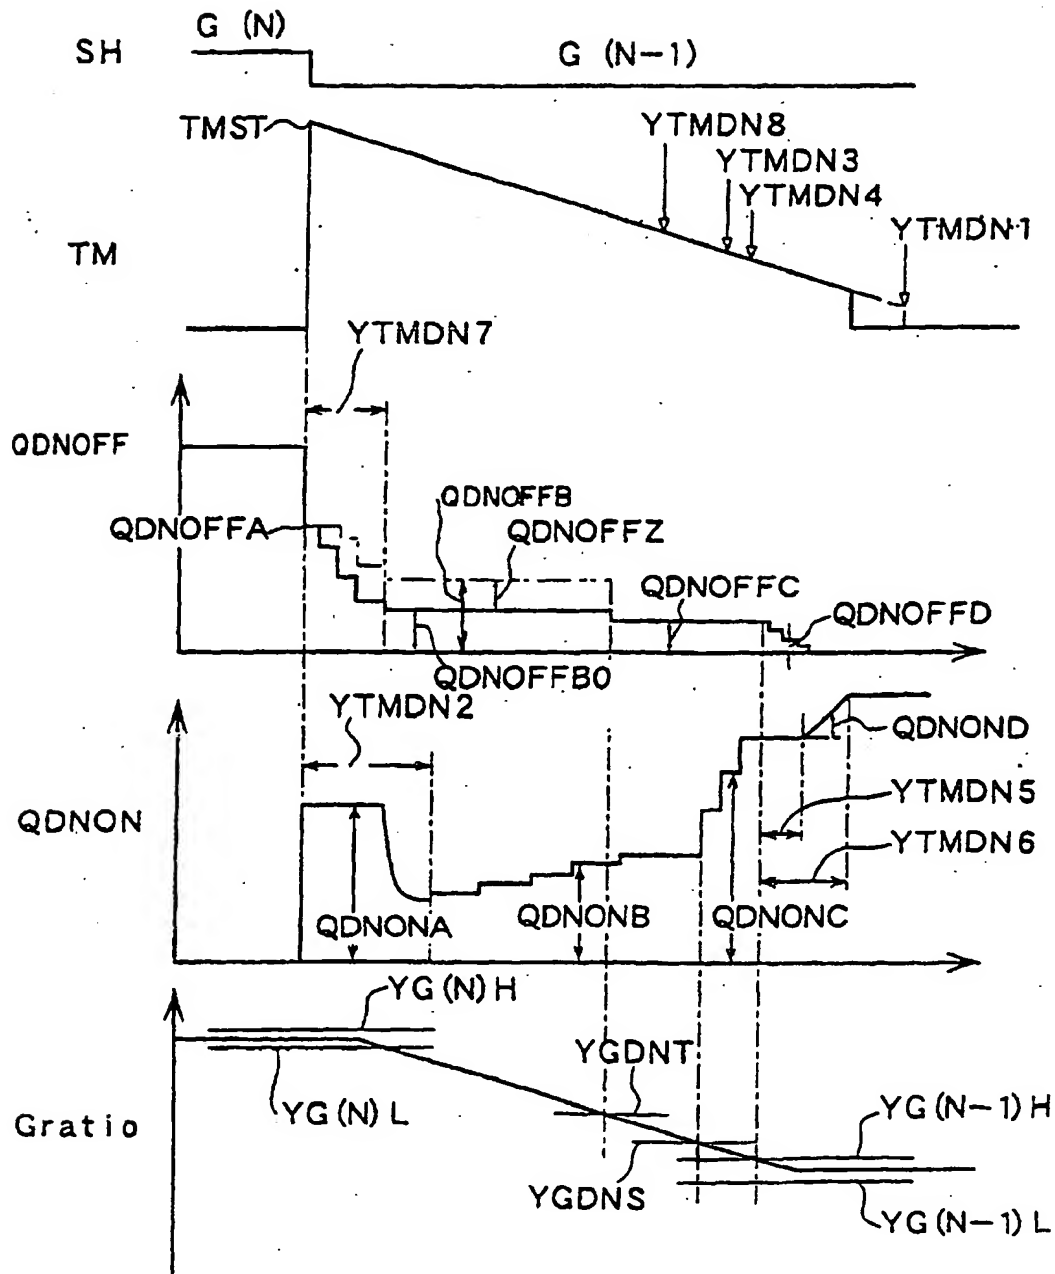




FIG. 13 A

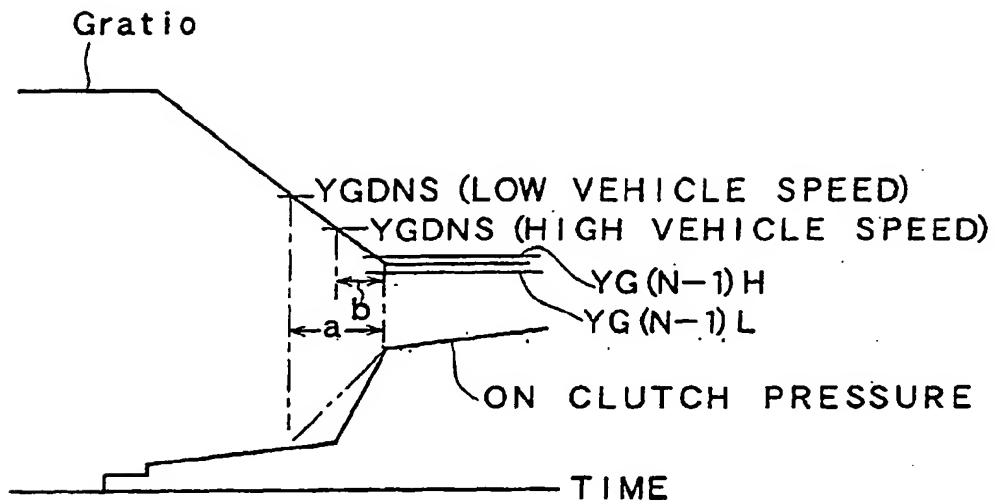


FIG. 13 B

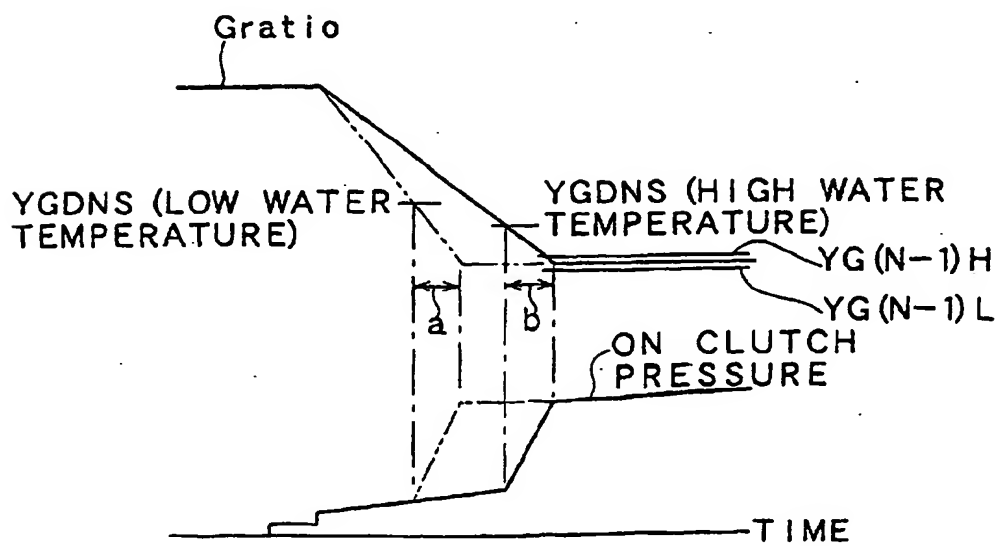


FIG. 14

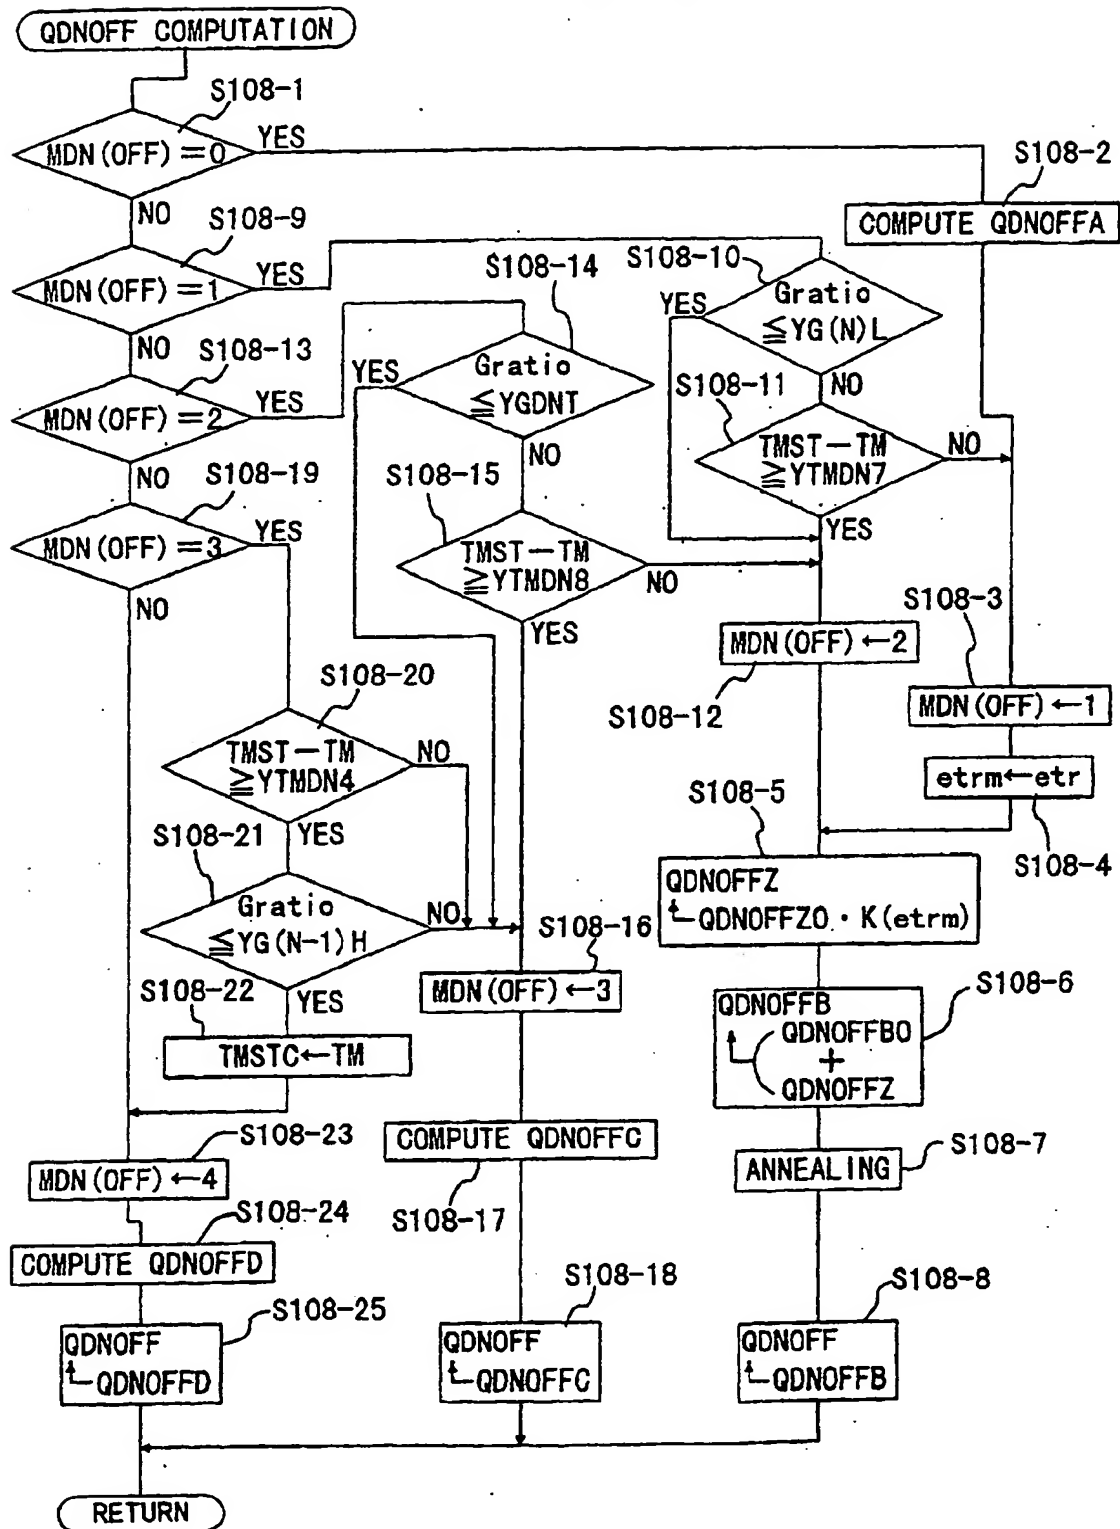


FIG. 15

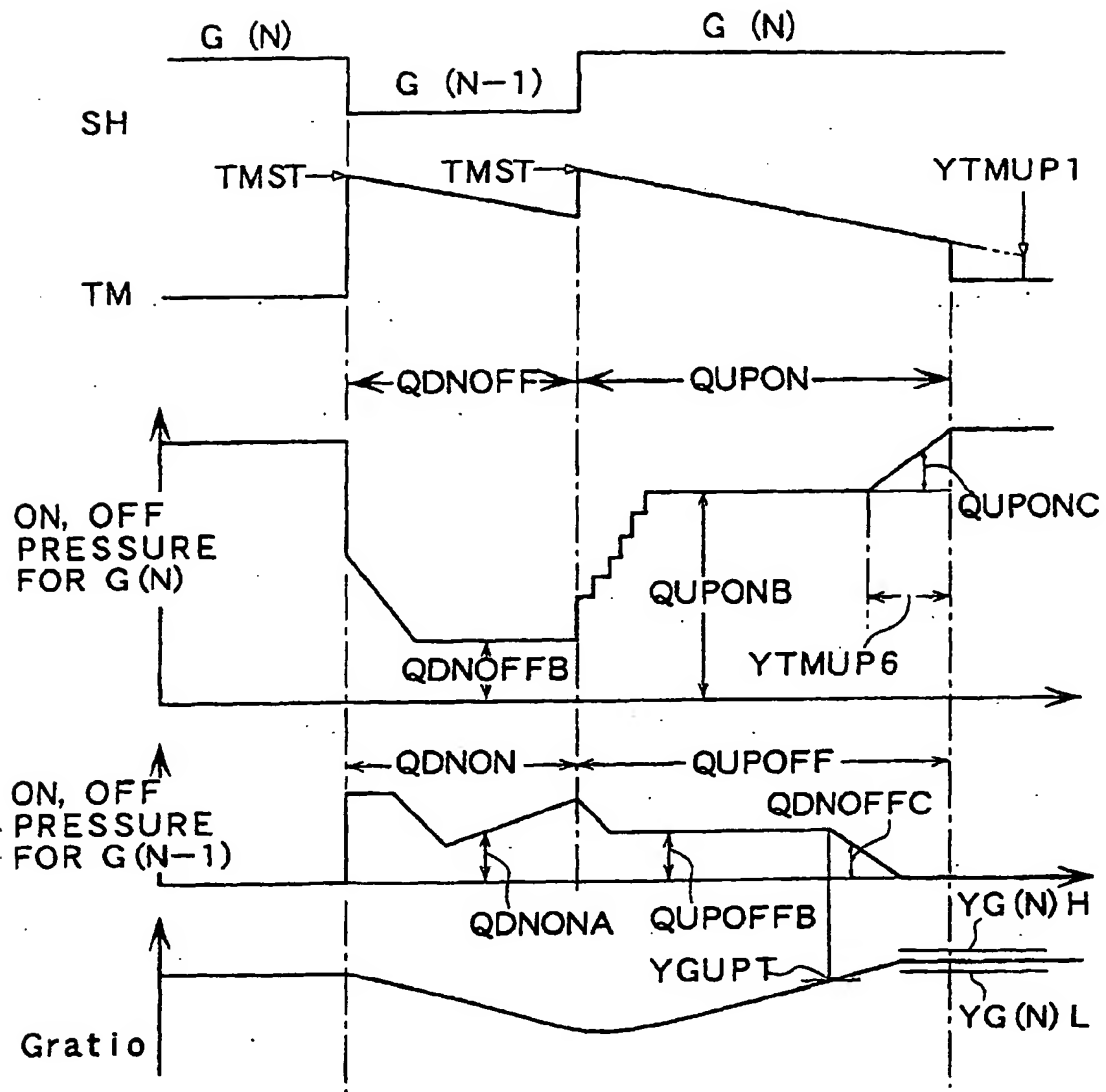


FIG. 16

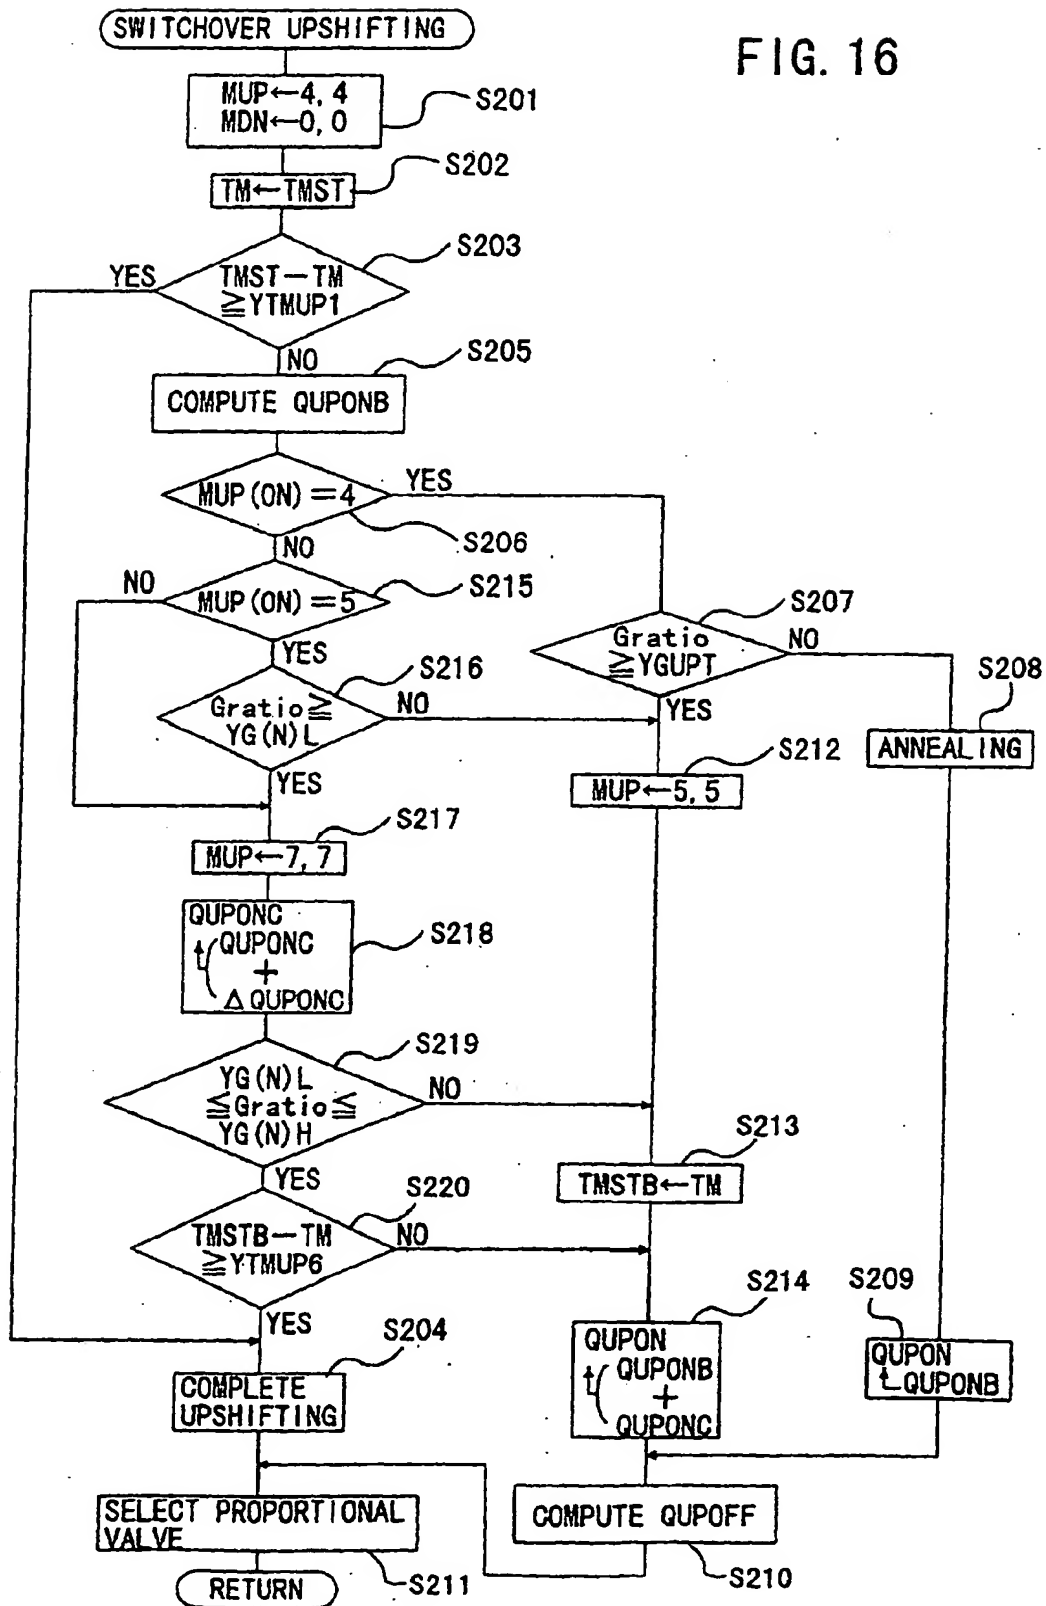


FIG. 17

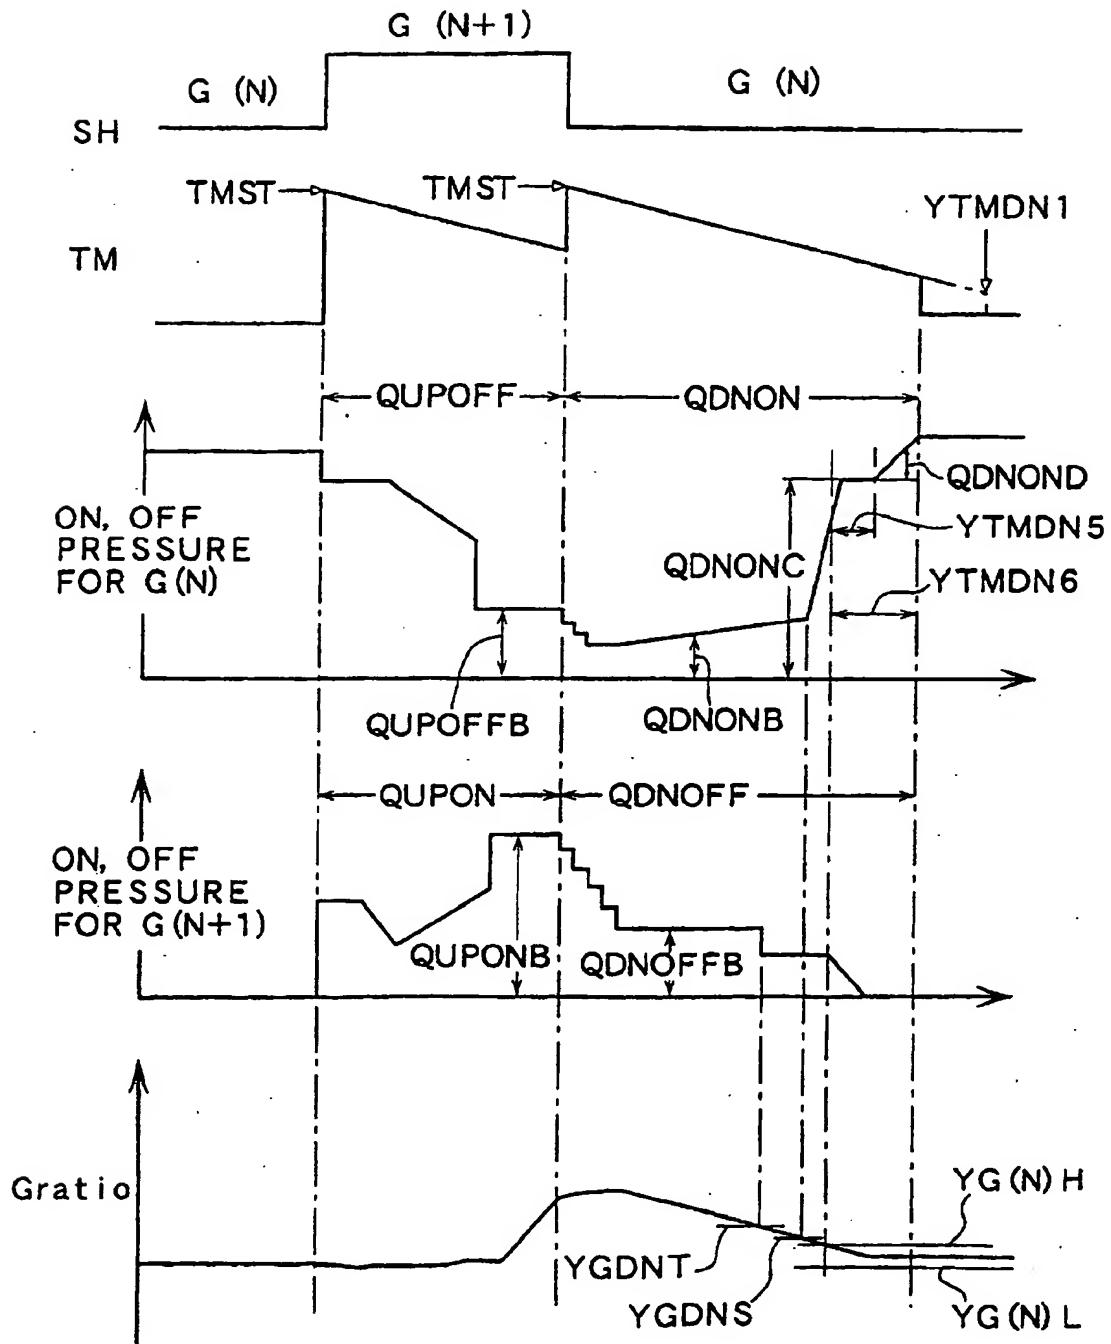


FIG. 18

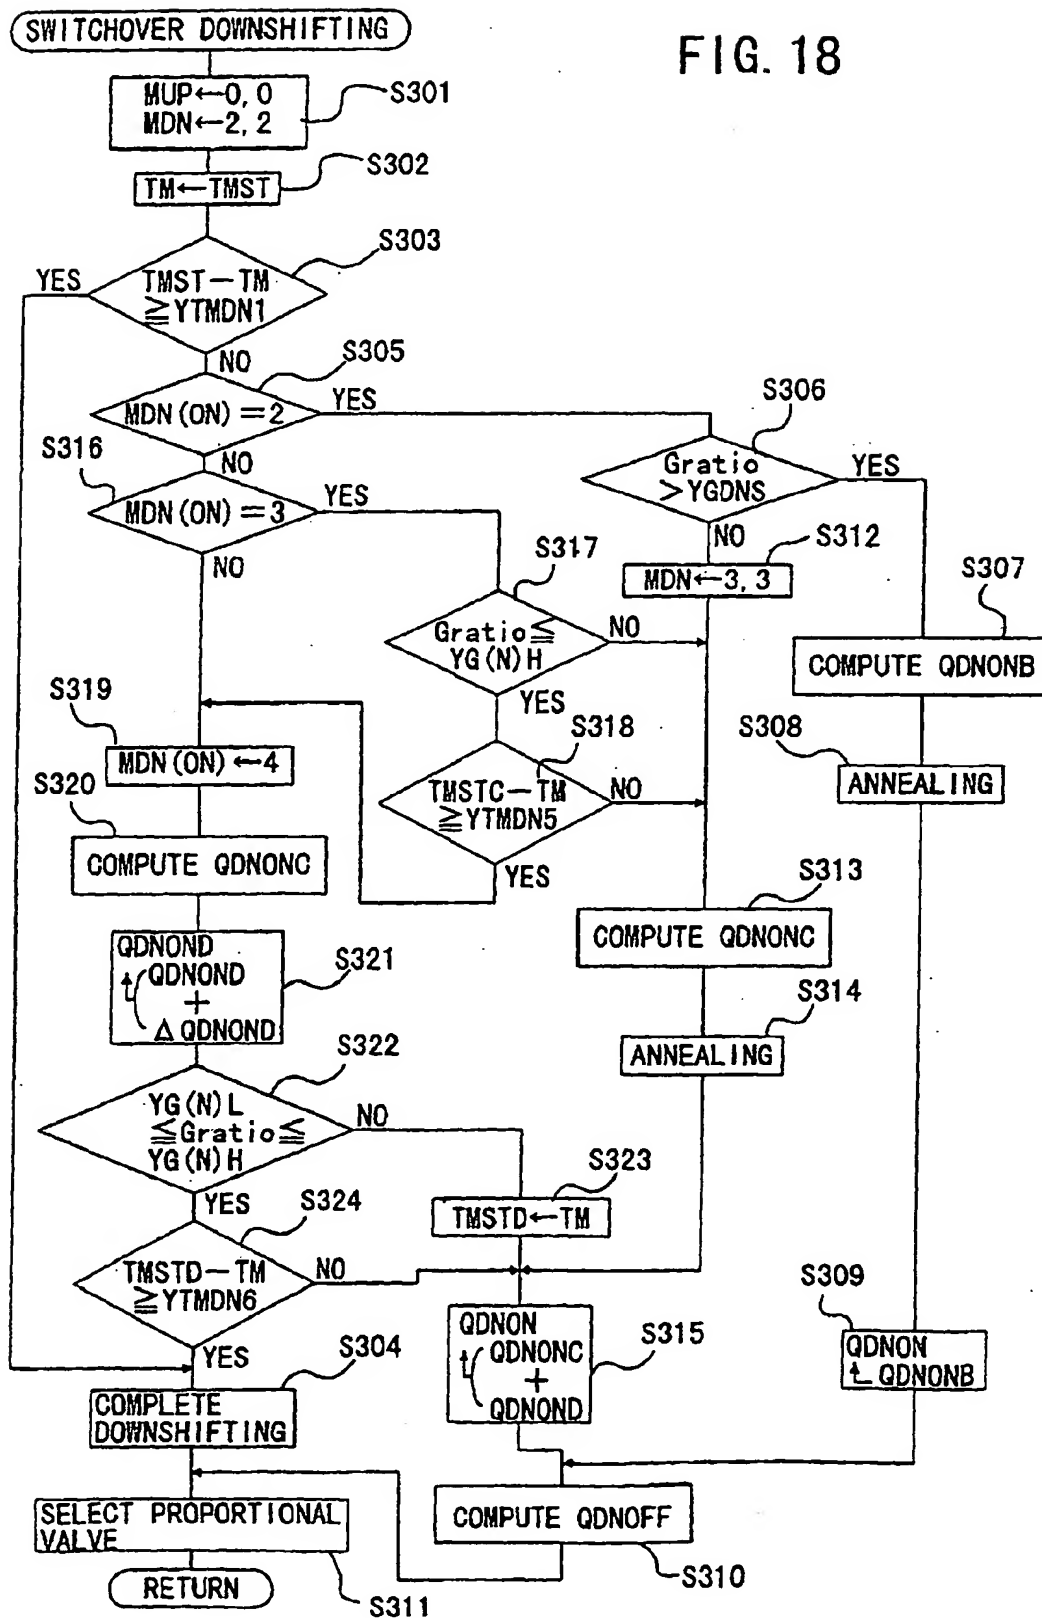


FIG. 19

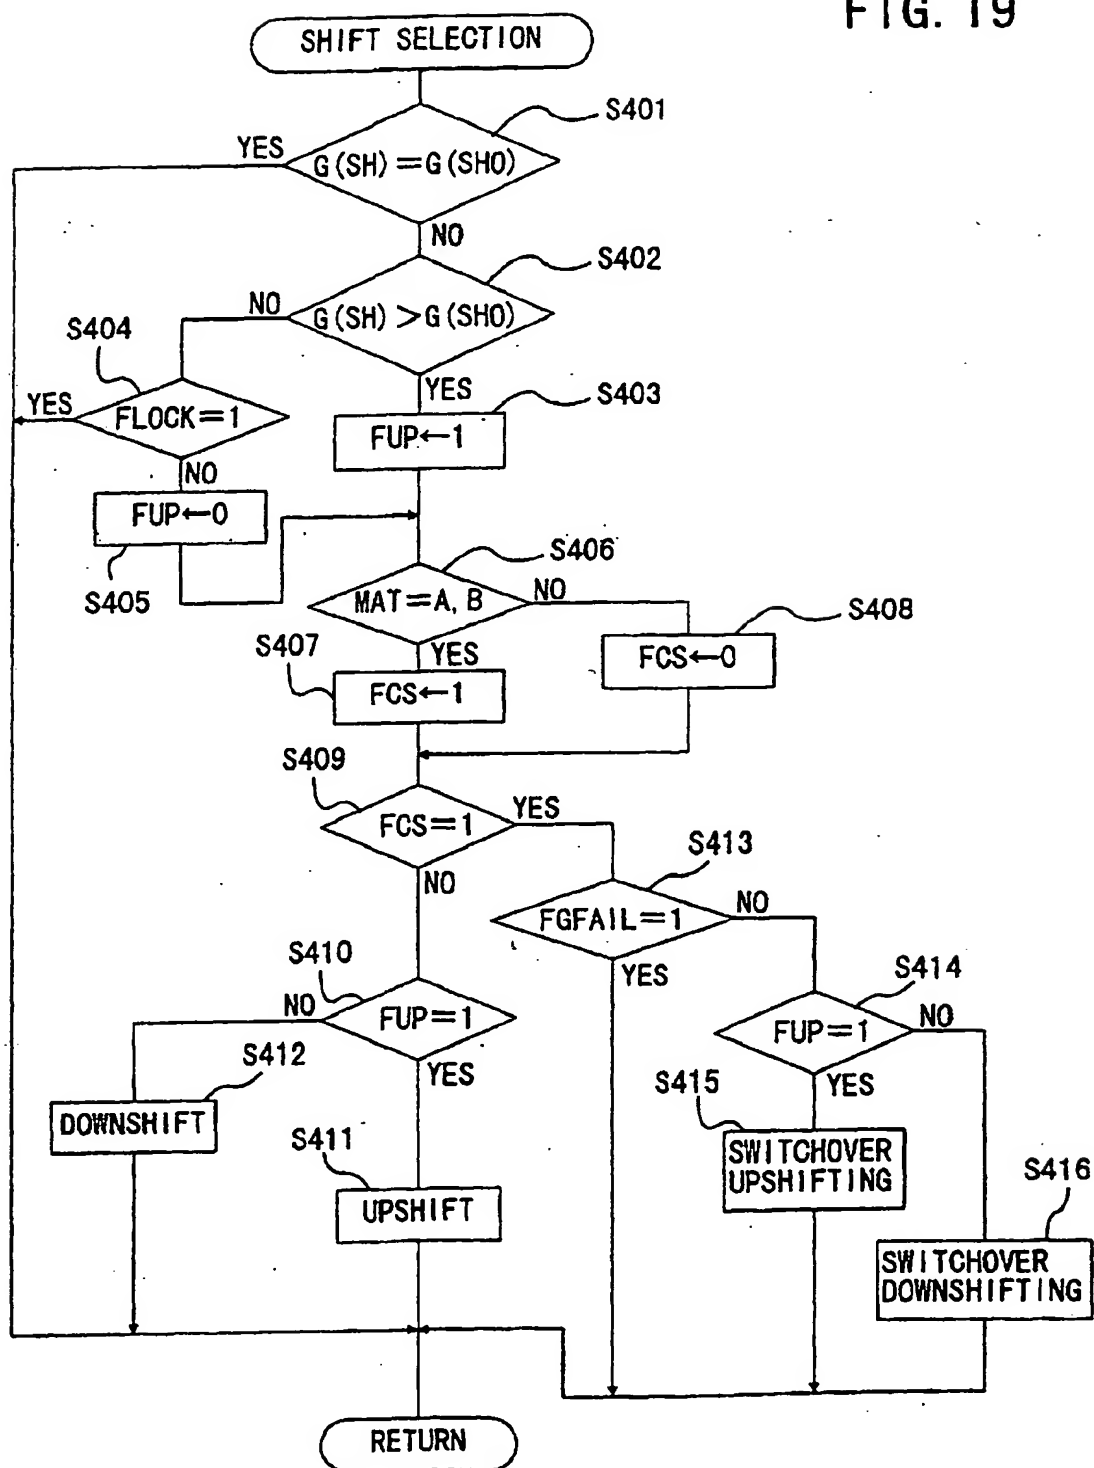


FIG. 20A

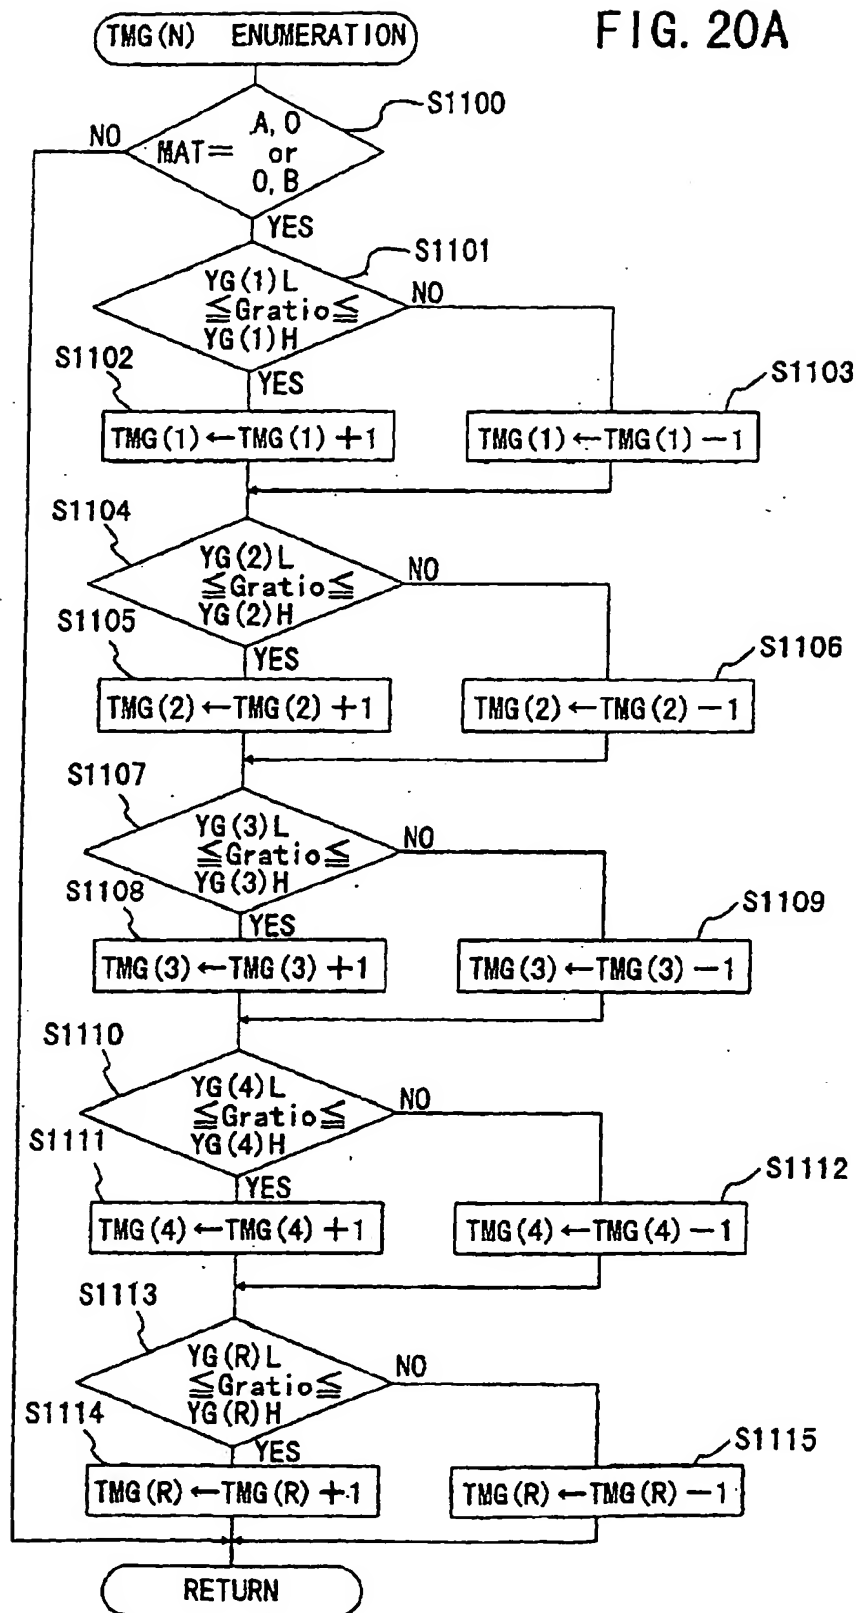


FIG. 20B

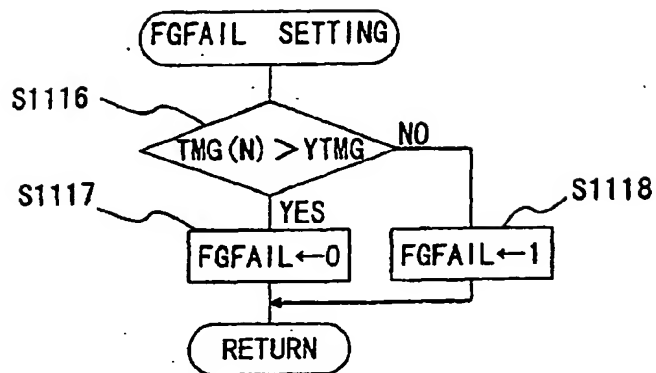


FIG. 21B

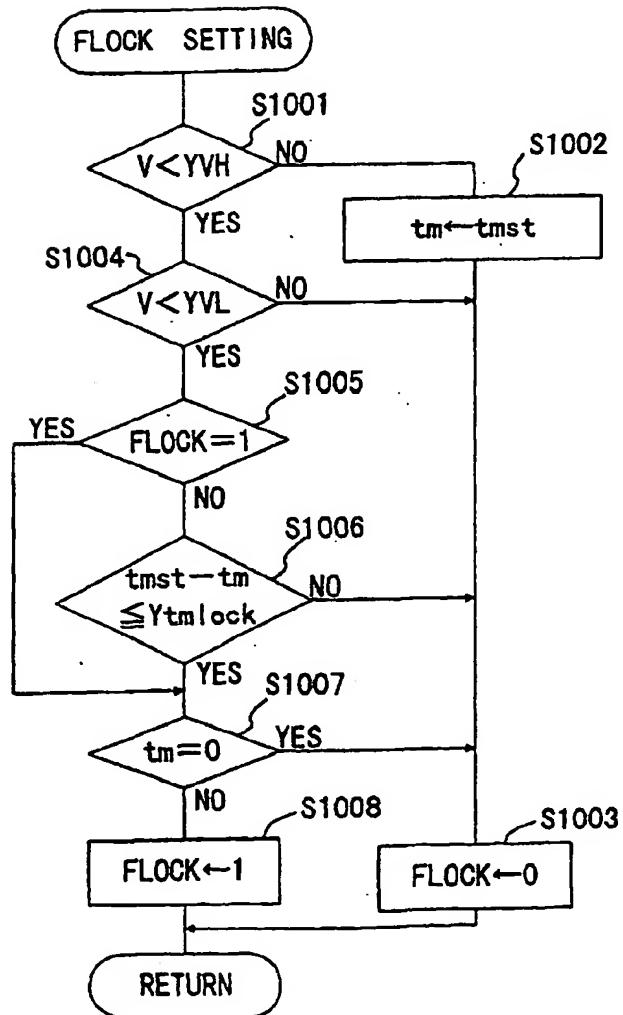


FIG. 21A

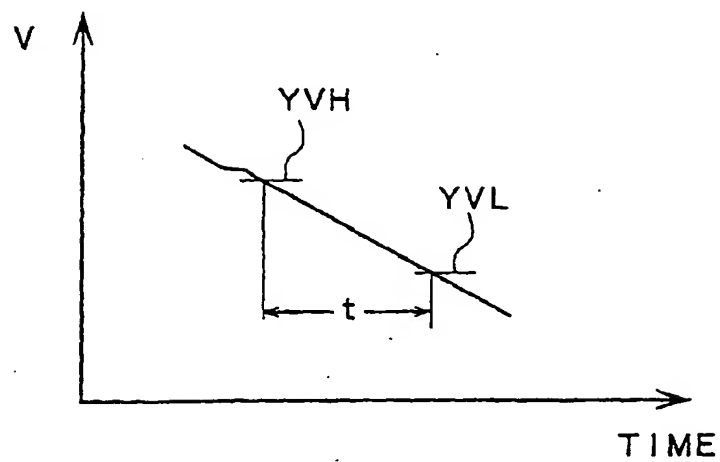


FIG. 22

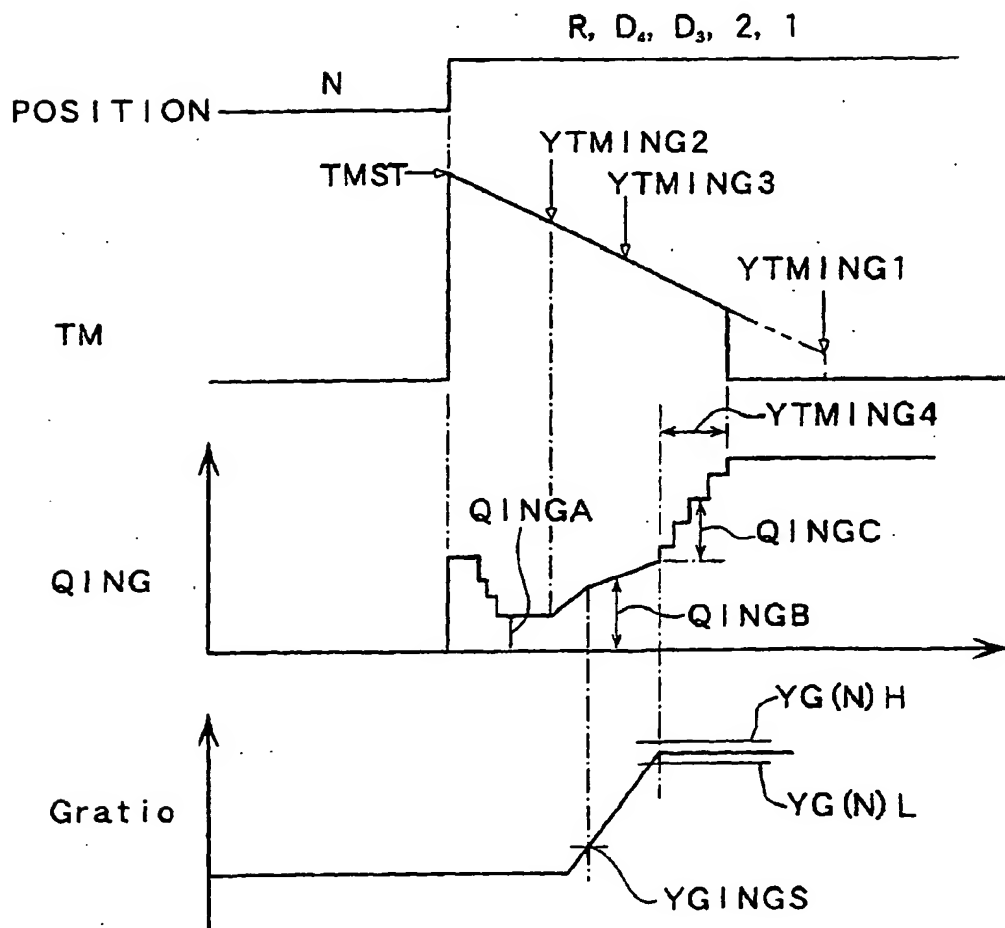


FIG. 23

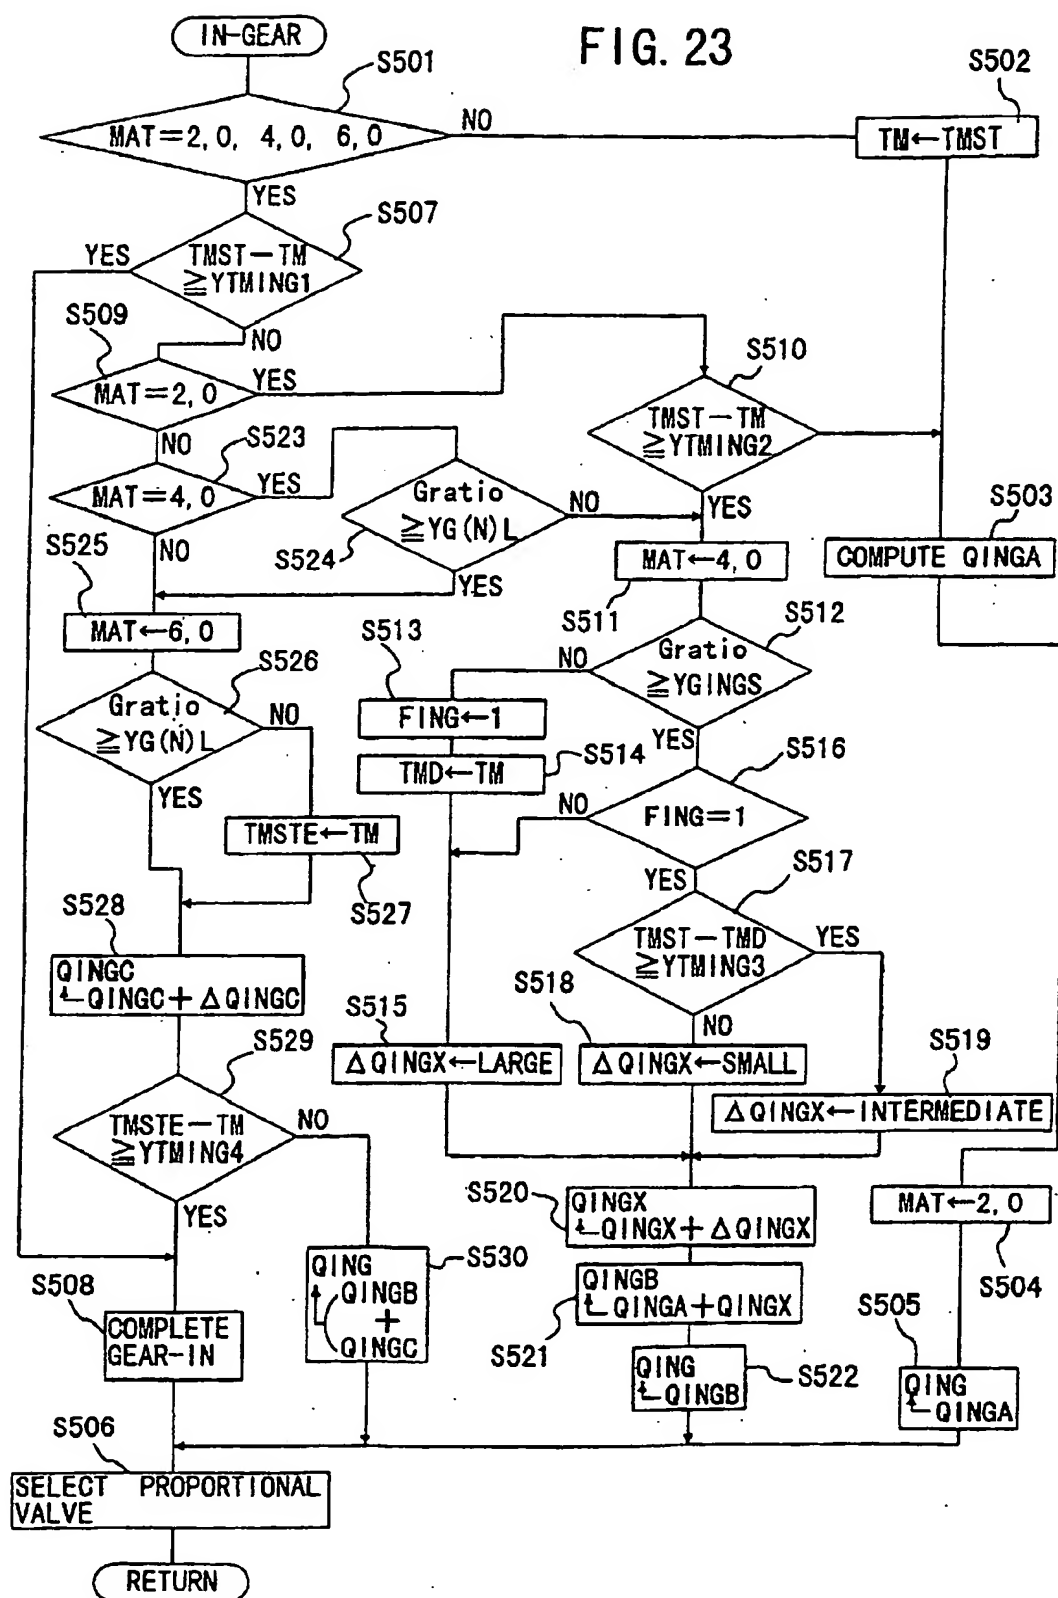


FIG. 24

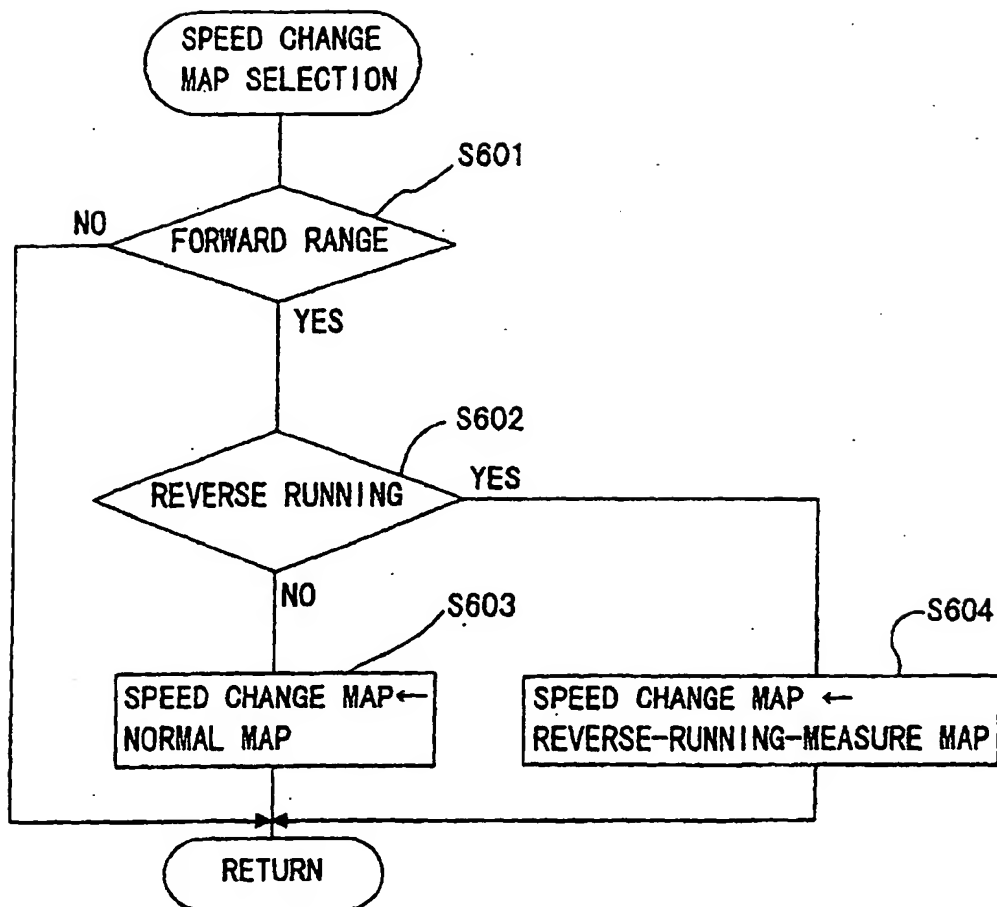


FIG. 25A

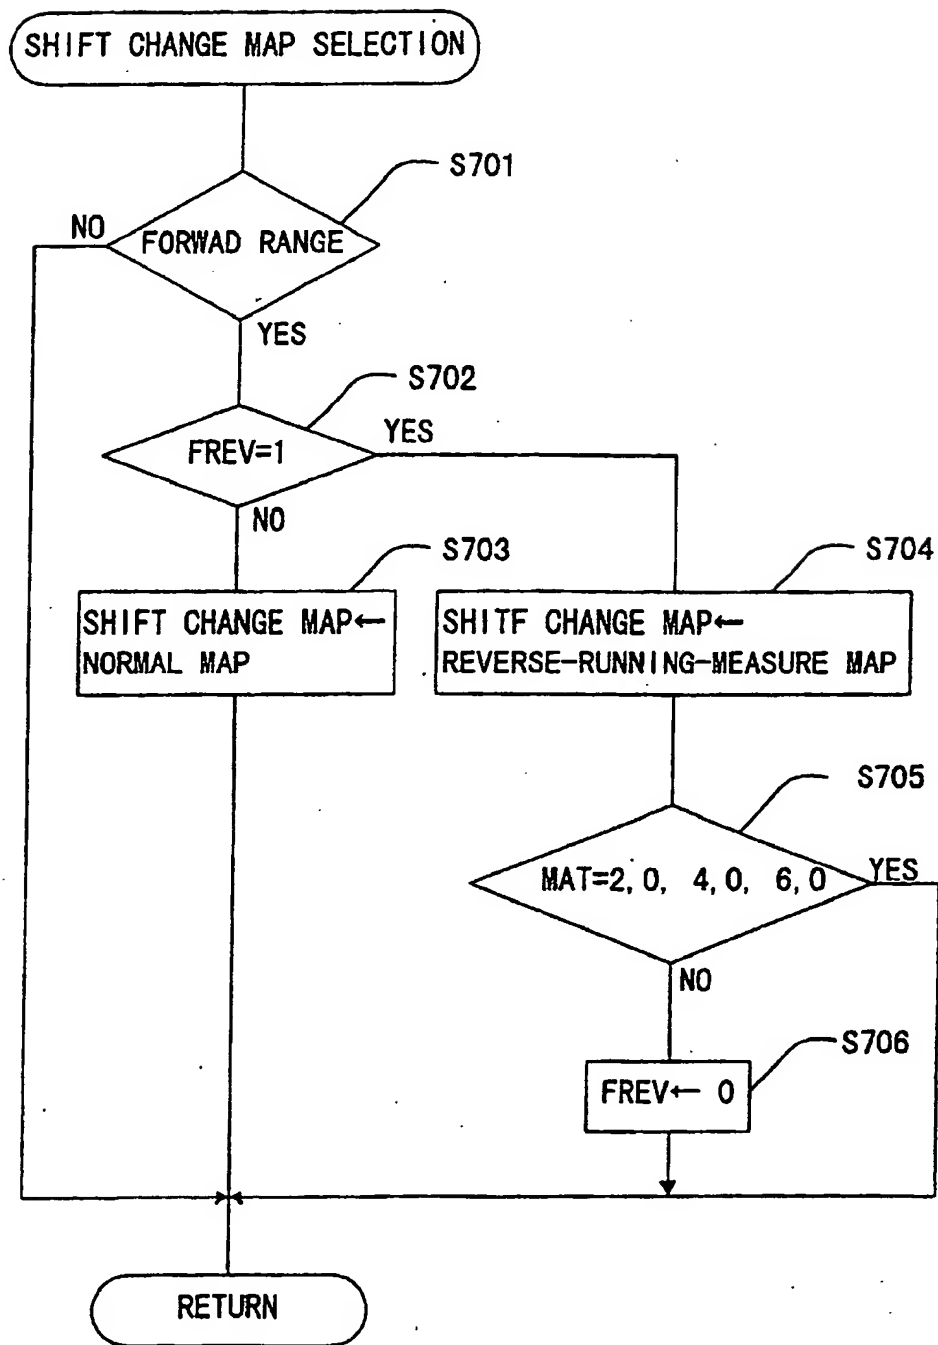


FIG. 25B

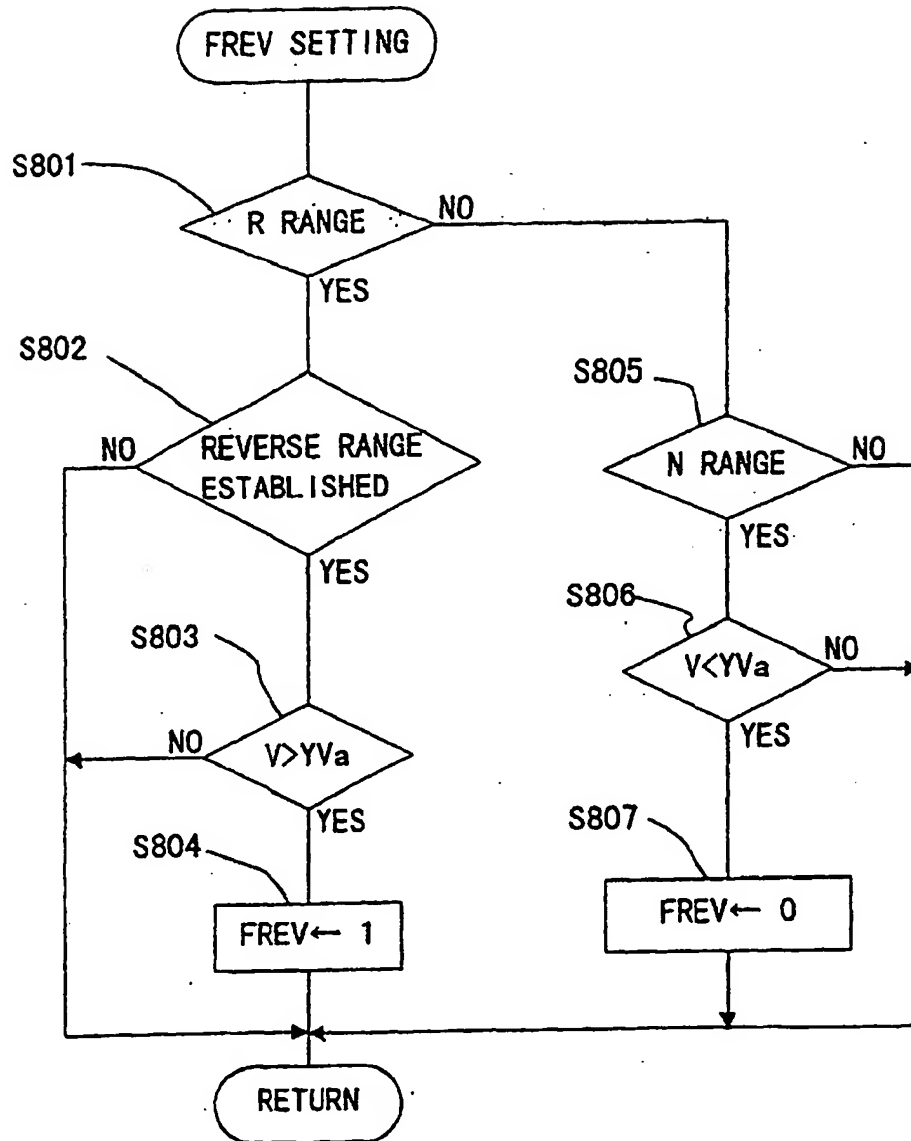


FIG. 26

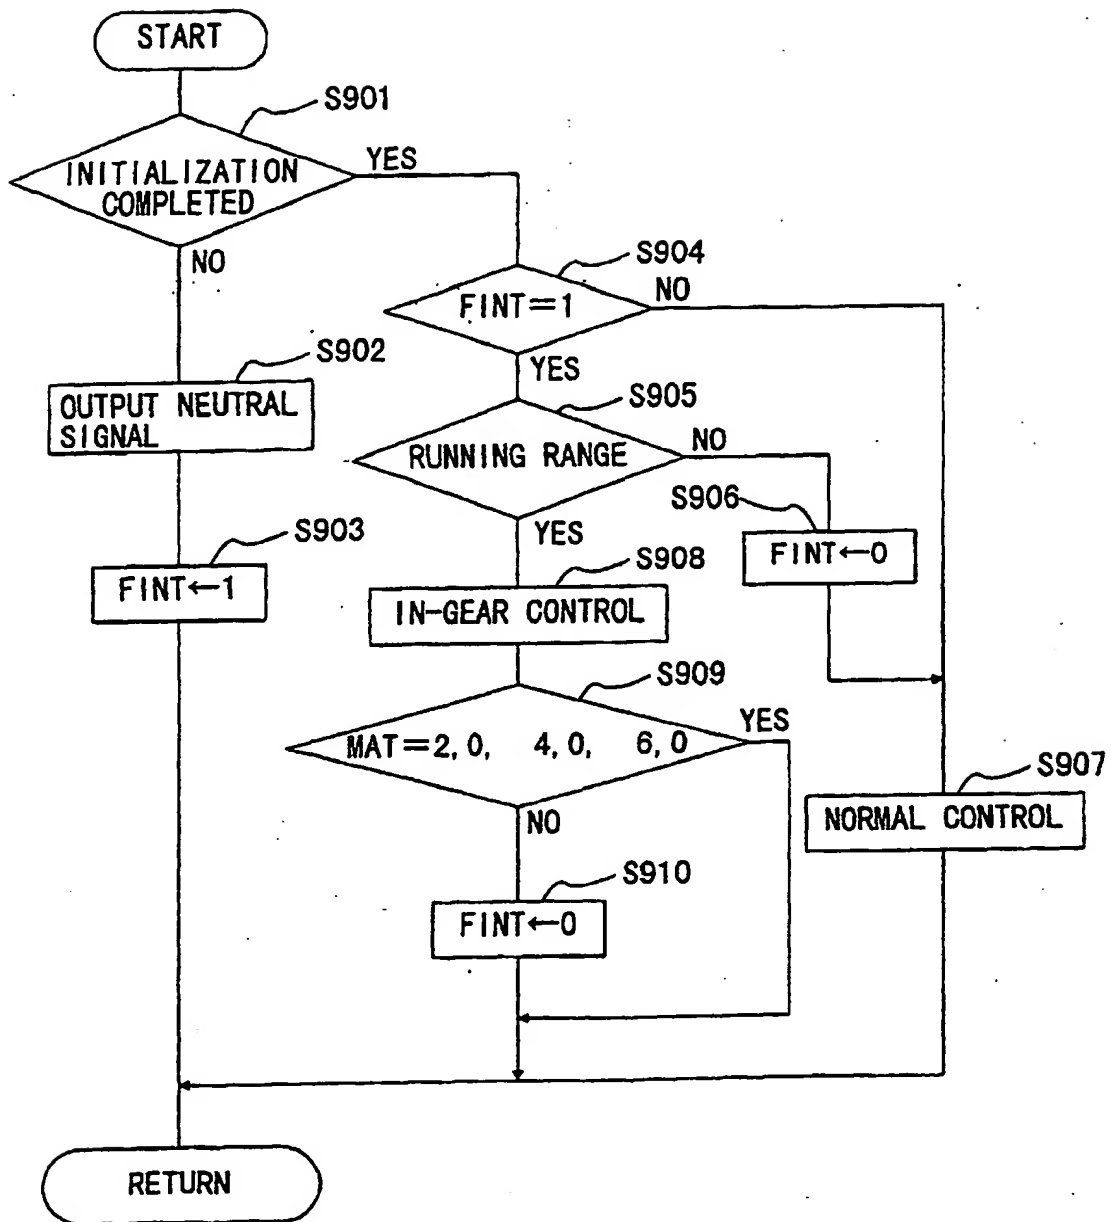


FIG. 27

